


1040-09-P

TECHNICAL SHEET

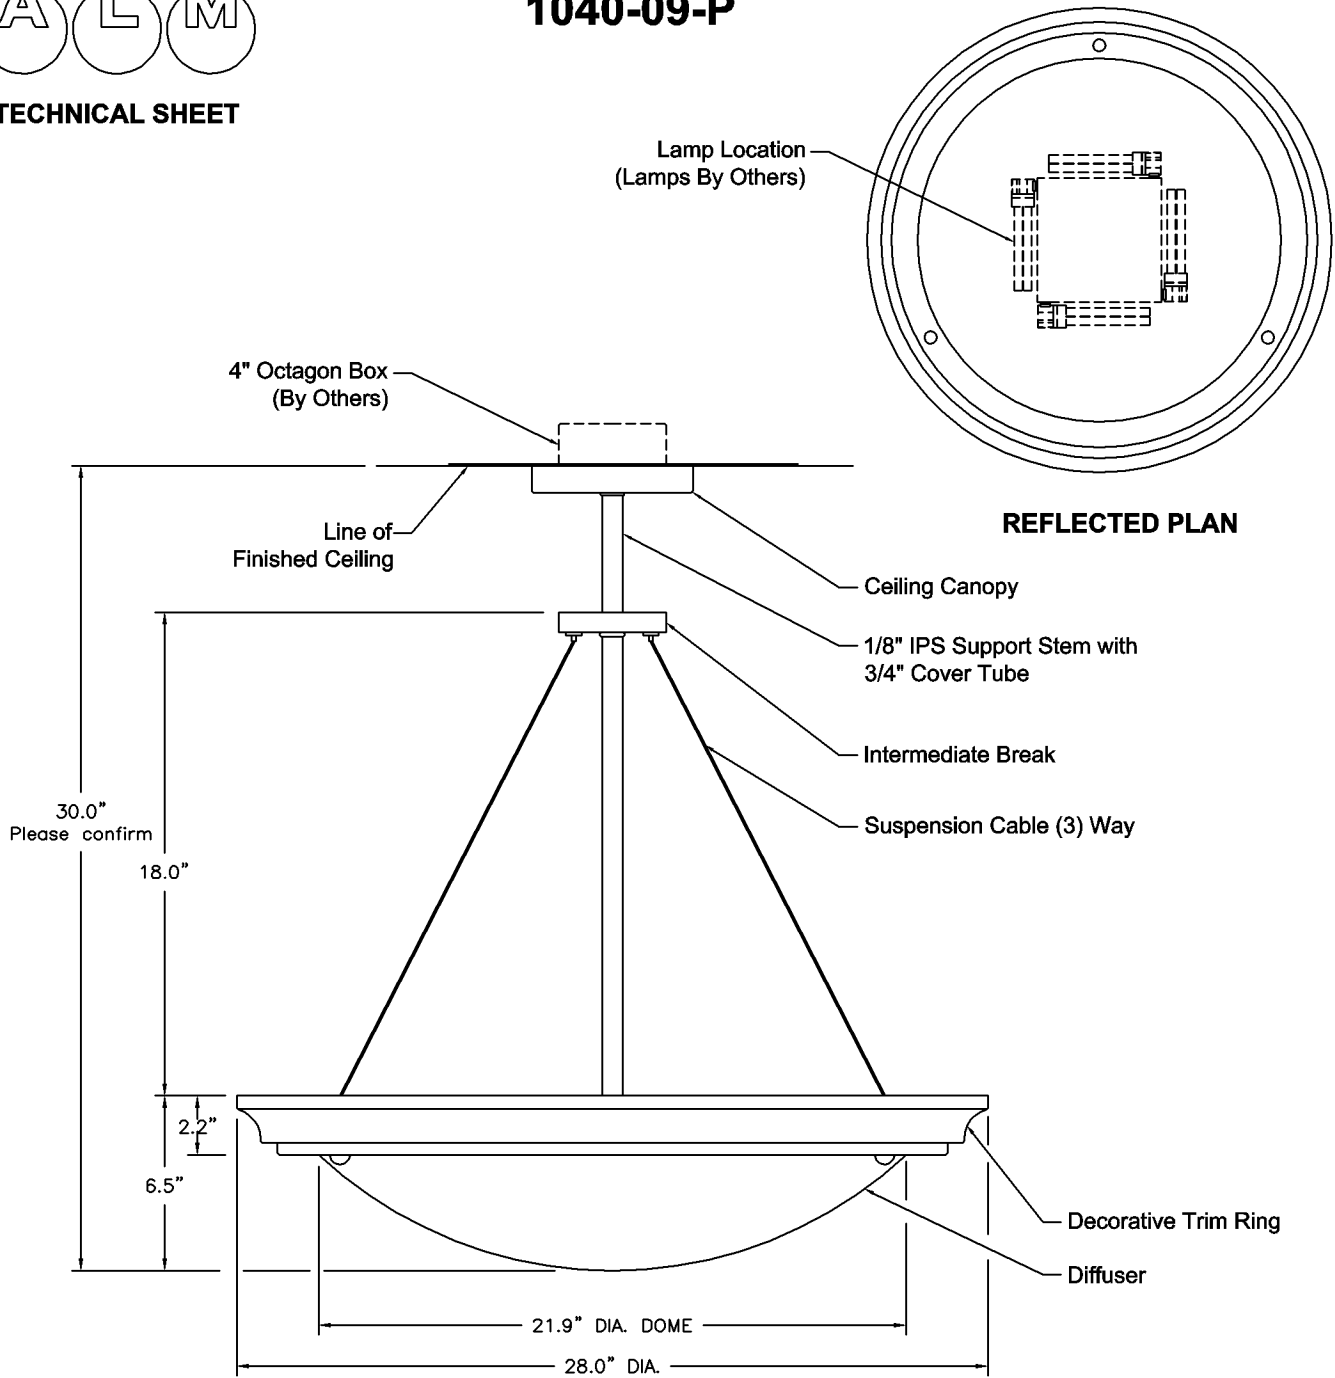

NOTE:
 Quantity: (206), Type F6
 Quantity: (30), Type F6D - Dimming, Lutron Compact SE
 Please confirm voltage!

1040	09	P	28"	4	PS	WA	120	.
Series	Variant	Style	Size S	Lamp	Finish	Diffuser	Voltage	Options
		P - Pendant C - Ceiling	17"	1 - (2) 13 W, PL-C/GX24q-1 2 - (2) 60W, A-19, Med.	PS - Bonded Silver Metallic PG - Bonded Gray Metallic PB - Bonded Brass Metallic	WA - White Acrylic SA - Clear Frosted Acrylic	120 V 277 V	DM - Specify Dimming Ballast EM - Fluorescent emergency, Battery - Remote Other _____
			24"	3 - (4) 13 W, PL-C/GX24q-1 4 - (4) 18 W, PL-C/GX24q-2	PAA-Anodized Aluminum PC - Custom Color			
			28"	4 - (4) 26 W, PL-C/GX24q-3 5 - (4) 32 W, PL-T/GX24q-3				
			34"	6 - (6) 36 W, PL-L/2G11 7 - (6) 40 W, PL-L/2G11				

