

100 Linear Suspended

Submittal - Straight Run

inter•lux

Project Name _____ SO # _____



Fixture Type _____ PO# _____



Ordering Information

| Model | Type | Length | LED ² | Color | Voltage | Power | Diffuser | Mount | Options |
|------------|------|--------|------------------|--|--|-------------------------|----------------|-------|---------|
| WG-S100LDL | S | A | L M H | 827 830 835 840 927 930 935 940 | UNV 120 | S D010 D3W DES | OD (STD) SD | S | |

Flush Diffuser - OD / SD

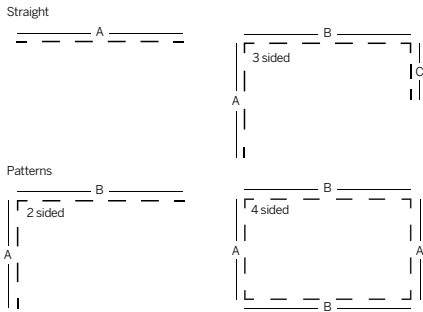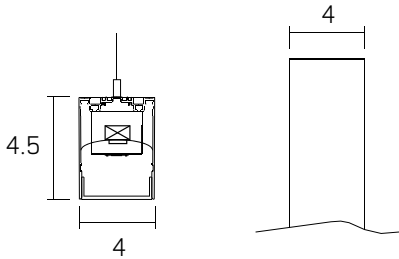

Luminaire

- Suspended ceiling mount.
- Easily installed internal LED tray assembly with integral driver.
- High reflectance white reflector.
- Flush snap-in opal diffuser (standard).
- Powdercoat painted white - RAL 9010.
- 48" suspension cable, standard.

Type

- S = Straight run

Length

- A, B, C = specify feet & inches to the nearest 0.25" (i.e. 6' 5.5")

LED²

- L = Low Power (3W/ft)
- M = Mid Power (6W/ft)
- H = High Power (10W/ft)

Color

- 80+ CRI minimum
- 827 = 2700K
- 830 = 3000K
- 835 = 3500K
- 840 = 4000K
- For 90+ CRI specify 927, 930, etc

Voltage

- UNV = 120-277V
- 120 = 120V (DFPN only)

Power Supply

- S = Standard driver, 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- D3W = Lutron, 1%, 3-wire fluorescent dimming, 120-277V
- DES = Lutron, 1%, EcoSystem E1/E2 digital dimming, 120-277V
- DFPN = Lutron 1% forward phase with neutral, 120V only

Diffuser

- OD = Flush opal diffuser (standard)
- SD = Flush satin diffuser

Mounting

- S = Suspended

Options

- Contact factory for emergency lighting options
- 1 See pattern specsheet.
 - 2 Wattage shown does not include power supplies/drivers.

Customer Approval

| | | |
|--------------------------|---------------------------------|------------------|
| <input type="checkbox"/> | Approved | Company _____ |
| <input type="checkbox"/> | Approved with corrections noted | Signature _____ |
| <input type="checkbox"/> | Revise and Resubmit | Print Name _____ |
| | | Date _____ |

Original Date Submitted _____

100 Linear Suspended

Submittal - Straight Run

Project Name _____ SO # _____

Fixture Type _____ PO# _____

| System | Qty. | 'A' |
|--------|-------|-------|
| 1 | _____ | _____ |
| 2 | _____ | _____ |
| 3 | _____ | _____ |
| 4 | _____ | _____ |
| 5 | _____ | _____ |
| 6 | _____ | _____ |
| 7 | _____ | _____ |
| 8 | _____ | _____ |
| 9 | _____ | _____ |
| 10 | _____ | _____ |
| 11 | _____ | _____ |
| 12 | _____ | _____ |
| 13 | _____ | _____ |
| 14 | _____ | _____ |
| 15 | _____ | _____ |

Customer Approval Company _____

Approved Signature _____

Approved with corrections noted Print Name _____

Revise and Resubmit Date _____

