


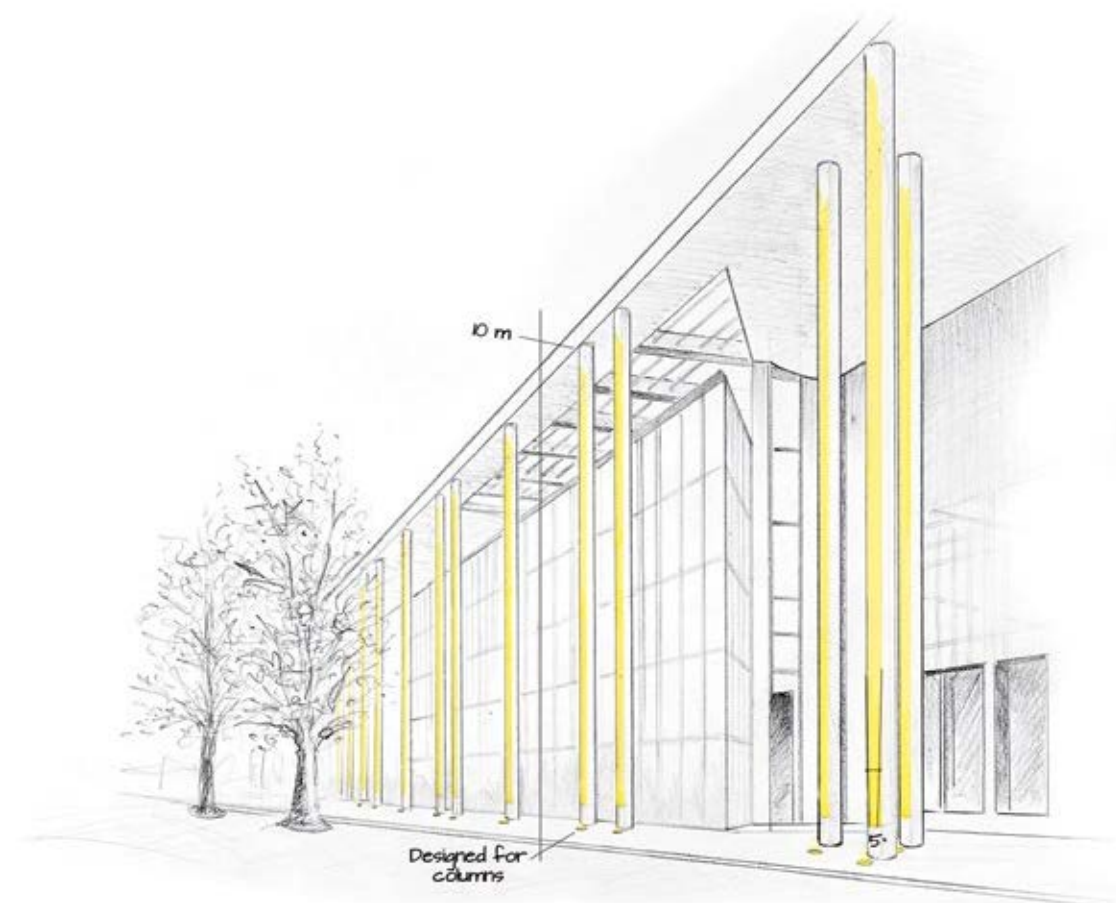

Suelo_R

Narrow 5° Optic
Stainless steel body
Controlled light emission

Arcada

Perfect for arches, lintels or even jambs, statues and reliefs. An indirect lighting with a homogeneous intensity involving the entire structure right from its base can be obtained through a photometric solid that **precisely follows the arch intrados**, avoiding unaesthetic hot spots and glare and **minimizing light pollution**.

Passive heat dissipation

Die cast Aluminum casing

Light management


Arch-shaped emission with a very narrow shape of the light beam coming out of the diffuser shorter side

Specialised functionality

Ideal lighting for windows and depressed arches with no glare or light pollution



Arcada | Arc light | powerLED 4W 350 mA




type			color			optic	
White	CRI 80	E95454	2700 K	544 lm	M	180°	18
Black	CRI 80	E95612	3000 K	580 lm	W		
Grey	CRI 80	E95619	4000 K	620 lm	N		

power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EIdoLED ECOdrive 30W, for 1-3 fixtures	0-10V EIdoLED SOLOdrive 50W, for 1-6 fixtures	0-10VEIdoLED SOLOdrive 100W, for 1-12 fixtures

Arcada | Arc light | powerLED 8W 630 mA



type			color			optic	
White	CRI 80	E95458	2700 K	876 lm	M	180°	18
Black	CRI 80	E95616	3000 K	932 lm	W		
Grey	CRI 80	E95623	4000 K	996 lm	N		

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EIdoLED ECOdrive 30W, for 1-3 fixtures	0-10V EIdoLED SOLOdrive 50W, for 1-4 fixtures	0-10VEIdoLED SOLOdrive 100W, for 1-8 fixtures




A walk-over uplight requiring **reduced installation space**, ideally suited to **illuminate columns** and **external architectural elements**.

Passive heat dissipation
Brass or Aluminum dissipating casing

Graceful aesthetics
Up to five finishes available for the brass or steel flange



Beret_R | Walk-over spotlight | powerLED 1W 350 mA



type			color			optic		
White	CRI 80	E92065	3000 K	145 lm	W	15°	15	
Grey	CRI 80	E92061	4000 K	155 lm	N	30°	30	
Chrome	CRI 80	E92066				60°	60	
Nickel	CRI 80	E92067				Diff.	00	
Steel	CRI 80	E92068						




power supply options (remote only)



ECO30W-350	SOLO50W-350	SOLO100W-350	E84915	E84336
0-10V EldoLED ECOdrive 30W, for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-20 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-40 fixtures	Outer casing (one housing required, order separately)	Outer casing

Beret_F | Walk-over spotlight | powerLED 2W 630 mA



type			color			optic		
Chrome	CRI 80	E93141	3000 K	233 lm	W	8°	08	
			4000 K	249 lm	N	15°	15	
						30°	30	
						60°	60	
						120°	12	
						Diff.	00	




power supply options (remote only)




ECO30W-630	SOLO50W-630	SOLO100W-630	E84918
0-10V EldoLED ECOdrive 30W, for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-16 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-32 fixtures	Outer casing (required, order separately)

Beret_2R | Walk-over spotlight | powerLED 2W 630 mA



type			color			optic		
Chrome	CRI 80	E93126	3000 K	233 lm	W	8°	08	
Nickel	CRI 80	E93127	4000 K	249 lm	N	15°	15	
Steel	CRI 80	E93128				30°	30	
						60°	60	
						120°	12	
						Diff.	00	




power supply options (remote only)



ECO30W-630	SOLO50W-630	SOLO100W-630	E84918
0-10V EldoLED ECOdrive 30W, for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-16 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-32 fixtures	Outer casing (required, order separately)

Beret_Q | Walk-over spotlight | powerLED 1W 350 mA



type			color			optic		
White	CRI 80	E92088	3000 K	145 lm	W	15°	15	
Grey	CRI 80	E92092	4000 K	155 lm	N	30°	30	
Chrome	CRI 80	E92069				60°	60	
Nickel	CRI 80	E92076				Diff.	00	
Steel	CRI 80	E92077						




power supply options (remote only)




ECO30W-350	SOLO50W-350	SOLO100W-350	E84915	E84336
0-10V EldoLED ECOdrive 30W, for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-20 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-40 fixtures	Outer casing (one housing required, order separately)	Outer casing

Beret_2Q | Walk-over spotlight | powerLED 2W 630 mA



type			color			optic		
Chrome	CRI 80	E93132	3000 K	233 lm	W	8°	08	
Nickel	CRI 80	E93133	4000 K	249 lm	N	15°	15	
Steel	CRI 80	E93134				30°	30	
						60°	60	
						120°	12	
						Diff.	00	




power supply options (remote only)




ECO30W-630	SOLO50W-630	SOLO100W-630	E84918
0-10V EldoLED ECOdrive 30W, for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-16 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-32 fixtures	Outer casing (required, order separately)

Beret_2Q | Walk-over spotlight | powerLED 2W 630 mA



type			color			optic		
Chrome	CRI 80	E93138	3000 K	233 lm	W	8°	08	
Nickel	CRI 80	E93139	4000 K	249 lm	N	15°	15	
Steel	CRI 80	E93140				30°	30	
						60°	60	
						120°	12	
						Diff.	00	




power supply options (remote only)



ECO30W-630	SOLO50W-630	SOLO100W-630	E84918
0-10V EldoLED ECOdrive 30W, for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-16 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-32 fixtures	Outer casing (required, order separately)

Beret_X Anti-glaring silk-screen | Walk-over spotlight | powerLED 1W 350 mA



type			color			optic	
White	CRI 80	E97800	3000 K	145 lm	W	15°	15
Grey	CRI 80	E97801	4000 K	155 lm	N	30°	30
Chrome	CRI 80	E97797				60°	60
Nickel	CRI 80	E97798					
Steel	CRI 80	E97799					

power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W, for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-20 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-40 fixtures




E84915



E84336

Outer casing Outer casing
(one housing required,
order separately)

Beret | Outer-casing



type	Ø in	h. in	suitable for	
PVC	0.8	1.6	Beret 1W	E84336

Beret | Outer-casing



type	Ø in	h. in	suitable for	
PVC	2.4	1.9	Beret 2W	E84915

Beret | Outer-casing



type	Ø in	h. in	suitable for	
PVC	2.4	3.4	Beret 2W	E84918



Fasim-2

inter•lux

The **ultimate cutting-edge uplight**, providing maximum protection for outdoor applications and featuring exclusive **optics, including a 3° beam angle** for highly impressive architectural lighting also in extremely tall buildings. Also available in the tilt version.

Passive heat dissipation

Anodized aluminum casing and stainless steel flange

Light management


Black silk-screened glass to minimise glare towards the observer even from a very close distance

Reliable outdoor installations

Maximum resistance against mechanical impacts and a higher cable protection against water and humidity thanks to the Aqua-Stop system




Fasim_2 | Walk-over spotlight | powerLED 8W 630 mA




											
type			color			optic					
Steel	CRI 80	E95968	2700 K	610 lm	M	15°			15		
			3000 K	644 lm	W	30°			30		
			4000 K	711 lm	N	60°			60		
						Asym.			07		
power supply options (remote only)											
											
ECO30W-630	SOLO50W-630	SOLO100W-630				E84928					
0-10V EldoLED ECOdrive 30W, for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-4 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-8 fixtures				Outer casing (required, ordered separately)					

Fasim_2 | Walk-over spotlight | powerLEDs 8W 630 mA




type			color			optic		
Steel	CRI 80	E94657	2700 K	876 lm	M	3°	03	
			3000 K	932 lm	W			
			4000 K	996 lm	N			
power supply options (remote only)								
ECO30W-630	SOLO50W-630	SOLO100W-630	E84928					
0-10V EldoLED ECOdrive 30W, for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-4 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-8 fixtures	Outer casing (required, ordered separately)					

Fasim_2 | Walk-over spotlight | powerLED 13W 350 mA




			        					
type			color			optic		
Steel	CRI 80	E95976	2700 K	1243 lm	M	15°	15	
			3000 K	1338 lm	W	30°	30	
			4000 K	1434 lm	N	60°	60	
power supply options (remote only)								
ECO30W-350	SOLO50W-350	SOLO100W-350				E84906		
0-10V EldoLED ECOdrive 30W, for 1 fixture	0-10V EldoLED SOLOdrive 50W, for 1-2 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-4 fixtures				Outer casing (required, ordered separately)		

Fasim_2 | Walk-over spotlight | arrayLED 13W 350 mA



type		color			optic	
Steel	CRI 80	E94415	2700 K	1743 lm	M	Asym.
			3000 K	1863 lm	W	
			4000 K	1863 lm	N	
power supply options (remote only)						
ECO30W-350	SOLO50W-350	SOLO100W-350	E84906			
0-10V EldoLED ECOdrive 30W, for 1 fixture	0-10V EldoLED SOLOdrive 50W, for 1-2 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-4 fixtures	Outer casing (required, ordered separately)			

Fasim_2 | Walk-over spotlight | powerLEDs 13W 500 mA




type			color			optic		
Steel	CRI 80	E94659	2700 K	1683 lm	M	3°	03	
			3000 K	1791 lm	W			
			4000 K	1917 lm	N			
power supply options (remote only)								
ECO30W-500	SOLO50W-500	SOLO100W-500					E84906	
0-10V EldoLED ECOdrive 30W, for 1 fixture	0-10V EldoLED SOLOdrive 50W, for 1-2 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-4 fixtures				Outer casing (required, ordered separately)		

“Marionette Theatre” - Düsseldorf
(Germany)



Fasim_2J | Walk-over spotlight | powerLED 8W 630 mA | tilttable beam




type		color			optic	
Steel	CRI 80	E95969	2700 K	610 lm	M	15°
			3000 K	644 lm	W	30°
			4000 K	711 lm	N	60°

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	E84928
0-10V EldoLED ECOdrive 30W, for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-4 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-8 fixtures	Outer casing (required, ordered separately)



Fasim_2J | Walk-over spotlight | powerLED 13W 350 mA | tilttable beam




type		color			optic	
Steel	CRI 80	E95977	2700 K	1243 lm	M	15°
			3000 K	1338 lm	W	30°
			4000 K	1434 lm	N	60°

power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350	E84906
0-10V EldoLED ECOdrive 30W, for 1 fixture	0-10V EldoLED SOLOdrive 50W, for 1-2 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-4 fixtures	Outer casing (required, ordered separately)




Fasim_2 | In-ground outer-casing



type	size in	h. in	suitable for	
PVC	4.7 x 4.7	5.5	Fasim_2 8W Fasim_2J 8W	E84928

Fasim_2 | In-ground outer-casing




type	size in	h. in	suitable for	
PVC	6.6 x 6.6	5.1	Fasim_2 13W Fasim_2J 13W	E84906





Insy_R | Drive-over spotlight | powerLED 3W 350 mA




type			color			optic		
Grey	CRI 80	E97818	3000 K	435 lm	W	30°	30	
Chrome	CRI 80	E97817	4000 K	465 lm	N	50°	50	
SS/Alu	CRI 80	E97819				70°	70	
						Diff.	00	

power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350	E84953
0-10V EldoLED ECOdrive 30W, for 1-5 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-10 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-20 fixtures	Outer casing (required, order separately)

Insy_RI | Drive-over spotlight | powerLED 3W 350 mA | stainless steel




type			color			optic		
Steel	CRI 80	E97823	3000 K	435 lm	W	30°	30	
			4000 K	465 lm	N	50°	50	
						70°	70	
						Diff.	00	

power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350	E84953
0-10V EldoLED ECOdrive 30W, for 1-5 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-10 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-20 fixtures	Outer casing (required, order separately)

Insy_R | Drive-over spotlight | powerLED 6W 630 mA




type			color			optic		
Grey	CRI 80	E88089	3000 K	699 lm	W	10°	10	
Chrome	CRI 80	E88088	4000 K	747 lm	N	30°	30	
SS/Alu	CRI 80	E88090				50°	50	
						120°	12	
						Diff.	00	

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	E84341
0-10V EldoLED ECOdrive 30W, for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-6 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-12 fixtures	Outer casing (required, order separately)

Insy_RJ | Drive-over spotlight | powerLED 6W 630 mA | tiltable beam




type			color			optic		
Grey	CRI 80	E97614	3000 K	699 lm	W	15°	15	
Chrome	CRI 80	E97613	4000 K	747 lm	N	30°	30	
Steel	CRI 80	E97615				60°	60	
						120°	12	

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	E84900
0-10V EldoLED ECOdrive 30W, for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-6 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-12 fixtures	Outer casing (required, order separately)

Insy_RJI | Drive-over spotlight | powerLED 6W 630 mA | stainless steel | tiltable beam




type			color			optic		
Steel	CRI 80	E87647	3000 K	699 lm	W	10°	10	
			4000 K	747 lm	N	30°	30	
						50°	50	
						120°	12	

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	E84900
0-10V EldoLED ECOdrive 30W, for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-6 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-12 fixtures	Outer casing (required, order separately)

Insy_RI | Drive-over spotlight | powerLED 6W 630 mA | stainless steel




type			color			optic		
Steel	CRI 80	E87635	3000 K	699 lm	W	10°	10	
			4000 K	747 lm	N	30°	30	
						50°	50	
						120°	12	
						Diff.	00	

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	E84900
0-10V EldoLED ECOdrive 30W, for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-6 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-12 fixtures	Outer casing (required, order separately)

Insy_RJ | Drive-over spotlight | powerLED 12W 630 mA | tiltable beam




type			color			optic		
Grey	CRI 80	E86867	3000 K	1398 lm	W	10°	10	
			4000 K	1494 lm	N	30°	30	
						50°	50	
						120°	12	

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	E84932
0-10V EldoLED ECOdrive 30W, for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-20 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-40 fixtures	Outer casing (required, order separately)

Insy_RJI | Drive-over spotlight | powerLED 12W 630 mA | stainless steel | tiltable beam



type			color			optic		
Steel	CRI 80	E86868	3000 K	1398 lm	W	10°	10	
			4000 K	1494 lm	N	30°	30	
						50°	50	
						120°	12	

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	E84900
0-10V EldoLED ECOdrive 30W, for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-20 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-40 fixtures	Outer casing (required, order separately)

Insy_Q | Drive-over spotlight | powerLED 3W 350 mA



type			color			optic		
Grey	CRI 80	E97821	3000 K	435 lm	W	30°	30	
Chrome	CRI 80	E97820	4000 K	465 lm	N	50°	50	
SS/Alu	CRI 80	E97822				70°	70	
						Diff.	00	

power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350	E84953
0-10V EldoLED ECOdrive 30W, for 1-6 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-12 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-24 fixtures	Outer casing (required, order separately)

Insy_QI | Drive-over spotlight | powerLED 3W 350 mA | stainless steel




type			color			optic		
Steel	CRI 80	E97824	3000 K	435 lm	W	30°	30	
			4000 K	465 lm	N	50°	50	
						70°	70	
						Diff.	00	

power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350	E84953
0-10V EldoLED ECOdrive 30W, for 1-5 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-102 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-20 fixtures	Outer casing (required, order separately)

Insy_QJ | Drive-over spotlight | powerLED 6W 630 mA | tilttable beam




type			color			optic		
Grey	CRI 80	E97617	3000 K	699 lm	W	15°	15	
Chrome	CRI 80	E97616	4000 K	747 lm	N	30°	30	
SS/Alu	CRI 80	E97618				60°	60	
						120°	12	

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	E84900
0-10V EldoLED ECOdrive 30W, for 1-4 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-6 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-12 fixtures	Outer casing (required, order separately)

Insy_Q | Drive-over spotlight | powerLED 6W 630 mA



type			color			optic		
Grey	CRI 80	E88092	3000 K	624 lm	W	10°	10	
Chrome	CRI 80	E88091	4000 K	666 lm	N	30°	30	
Steel	CRI 80	E88093				50°	50	
						120°	12	
						Diff.	00	

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	E84900
0-10V EldoLED ECOdrive 30W, for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-20 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-40 fixtures	Outer casing (required, order separately)

Insy_QI | Drive-over spotlight | powerLED 6W 630 mA | stainless steel




type			color			optic		
Steel	CRI 80	E87636	3000 K	699 lm	W	10°	10	
			4000 K	747 lm	N	30°	30	
						50°	50	
						120°	12	
						Diff.	00	

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	E84900
0-10V EldoLED ECOdrive 30W, for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-20 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-40 fixtures	Outer casing (required, order separately)

Insy_QJI | Drive-over spotlight | powerLED 6W 630 mA | stainless steel | tilttable beam



type			color			optic		
Steel	CRI 80	E87648	3000 K	699 lm	W	10°	10	
			4000 K	747 lm	N	30°	30	
						50°	50	
						120°	12	

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	E84900
0-10V EldoLED ECOdrive 30W, for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-20 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-40 fixtures	Outer casing (required, order separately)

Insy | Outer-casing



type	Ø in	h. in	suitable for	
PVC	2.6	2.2	Insy_Q-RI 3W	E84953

Insy | Outer-casing




type	Ø in	h. in	suitable for	
PVC	4.3	6.1	Insy_R-Q 4.5W Insy_Q 6W	E84341

Insy | Outer-casing



type	Ø in	h. in	suitable for	
PVC	4.3	8.7	Insy_RJ-QJ 6W Insy_RI-QI 6W Insy_RJI-QJI 6W	E84900

Insy | Outer-casing




type	Ø in	h. in	suitable for	
PVC	6.7	9.4	Insy_RJ 12 W	E84932





Ivil_R | Drive-over spotlight | powerLED 2W 630 mA





type			color			optic	
Grey	CRI 80	E97586	3000 K	233 lm	W	15°	15
Chrome	CRI 80	E97585	4000 K	249 lm	N	30°	30
Steel	CRI 80	E97587				60°	60
						120°	12
						Diff.	00

power supply options (remote only)



ECO30W-630	SOLO50W-630	SOLO100W-630	E84936
0-10V EldoLED ECOdrive 30W, for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-16 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-32 fixtures	Outer casing (required, order separately)

Ivil_R | Drive-over spotlight | powerLED 2W 630 mA




type			color			optic	
Grey	CRI 80	E97084	3000 K	233 lm	W	3°	03
Chrome	CRI 80	E97083	4000 K	249 lm	N		
Steel	CRI 80	E97085					

power supply options (remote only)



ECO30W-630	SOLO50W-630	SOLO100W-630	E84935
0-10V EldoLED ECOdrive 30W, for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-16 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-32 fixtures	Outer casing (required, order separately)

Ivil_RJ | Drive-over spotlight | powerLED 2W 630 mA | tiltable beam




type			color			optic	
Grey	CRI 80	E97598	3000 K	233 lm	W	15°	15
Chrome	CRI 80	E97597	4000 K	249 lm	N	30°	30
Steel	CRI 80	E97599				60°	60
						120°	12

power supply options (remote only)



ECO30W-630	SOLO50W-630	SOLO100W-630	E84936
0-10V EldoLED ECOdrive 30W, for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-16 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-32 fixtures	Outer casing (required, order separately)

Ivil_RJl | Drive-over spotlight | powerLED 2W 630 mA | stainless steel | tiltable beam




type			color			optic	
Steel	CRI 80	E93932	3000 K	233 lm	W	8°	08
			4000 K	249 lm	N	15°	15
						30°	30
						60°	60

power supply options (remote only)



ECO30W-630	SOLO50W-630	SOLO100W-630	E84936
0-10V EldoLED ECOdrive 30W, for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-16 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-32 fixtures	Outer casing (required, order separately)

Ivil_Q | Drive-over spotlight | powerLED 2W 630 mA




type			color			optic	
Grey	CRI 80	E97589	3000 K	233 lm	W	15°	15
Chrome	CRI 80	E97588	4000 K	249 lm	N	30°	30
Steel	CRI 80	E97590				60°	60
						120°	12

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	E84936
0-10V EidoLED ECOdrive 30W, for 1-10 fixtures	0-10V EidoLED SOLOdrive 50W, for 1-16 fixtures	0-10VEidoLED SOLOdrive 100W, for 1-32 fixtures	Outer casing (required, order separately)



Ivil_QJ | Drive-over spotlight | powerLED 2W 630 mA | tiltable beam




type			color			optic	
Grey	CRI 80	E97601	3000 K	233 lm	W	15°	15
Chrome	CRI 80	E97600	4000 K	249 lm	N	30°	30
Steel	CRI 80	E97602				60°	60
						120°	12

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	E84936
0-10V EidoLED ECOdrive 30W, for 1-10 fixtures	0-10V EidoLED SOLOdrive 50W, for 1-16 fixtures	0-10VEidoLED SOLOdrive 100W, for 1-32 fixtures	Outer casing (required, order separately)



Ivil_QJI | Drive-over spotlight | powerLED 2W 630 mA | stainless steel | tiltable beam



type			color			optic	
Steel	CRI 80	E93933	3000 K	233 lm	W	8°	08
			4000 K	249 lm	N	15°	15
						30°	30
						60°	60

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	E84936
0-10V EidoLED ECOdrive 30W, for 1-10 fixtures	0-10V EidoLED SOLOdrive 50W, for 1-16 fixtures	0-10VEidoLED SOLOdrive 100W, for 1-32 fixtures	Outer casing (required, order separately)



Ivil | Outer-casing



type	Ø in	h. in	suitable for	
PVC	2.7	5.5	Ivil (no driver)	E84936

Ivil | Outer-casing



type	Ø in	h. in	suitable for	
PVC	2.7	5.5	Ivil (no driver)	E84935

A drive-over uplight whose undisputable strength is its **reduced height**. A **good luminous flux and high protection** make this lighting fixture the ideal partner to illuminate outdoor architecture in a versatile way.


- Passive heat dissipation**
Anodized aluminum casing or AISI 316 stainless steel casing for high salinity environments
- Light management**
Partly black silk-screened diffuser to reduce glare
- Reduced installation space**
Minimum installation space, 2.2 to 2.6 in total height




Orma

Orma_R | Drive-over spotlight | powerLED 3W 350 mA







type

SteelAlu

CRI 80

E96098

color

2700 K

408 lm

M

15°

15

3000 K

435 lm

W

30°

30

4000 K

465 lm

N

60°

60

power supply options (remote only)

ECO30W-350

0-10V EldoLED ECOdrive 30W, for 1-5 fixtures

SOLO50W-350

0-10V EldoLED SOLOdrive 50W, for 1-10 fixtures

SOLO100W-350


0-10VEldoLED SOLOdrive 100W, for 1-20 fixtures


E98057

Outer casing (required, order separately)

Orma_R | Drive-over spotlight | powerLED 6W 350 mA







type

SteelAlu

CRI 80

E93980

color

2700 K

816 lm

M

8°

08

3000 K

870 lm

W

30°

30

4000 K

930 lm

N

60°

60

Diff.

00

power supply options (remote only)

ECO30W-350

0-10V EldoLED ECOdrive 30W, for 1-2 fixtures

SOLO50W-350

0-10V EldoLED SOLOdrive 50W, for 1-4 fixtures

SOLO100W-350


0-10VEldoLED SOLOdrive 100W, for 1-8 fixtures


E98399

Outer casing (required, order separately)

Orma_RI | Drive-over spotlight | powerLED 3W 350 mA | stainless steel







type

Steel

CRI 80

E96100

color

2700 K

408 lm

M

15°

15

3000 K

435 lm

W

30°

30

4000 K

465 lm

N

60°

60

power supply options (remote only)

ECO30W-350

0-10V EldoLED ECOdrive 30W, for 1-5 fixtures

SOLO50W-350

0-10V EldoLED SOLOdrive 50W, for 1-10 fixtures

SOLO100W-350


0-10VEldoLED SOLOdrive 100W, for 1-20 fixtures


E98057

Outer casing (required, order separately)

Orma_RI | Drive-over spotlight | powerLED 6W 350 mA | stainless steel







type

Steel

CRI 80

E93993

color

2700 K

816 lm

M

8°

08

3000 K

870 lm

W

30°

30

4000 K

930 lm

N

60°

60

Diff.

00

power supply options (remote only)

ECO30W-350

0-10V EldoLED ECOdrive 30W, for 1-2 fixtures

SOLO50W-350

0-10V EldoLED SOLOdrive 50W, for 1-4 fixtures

SOLO100W-350

0-10VEldoLED SOLOdrive 100W, for 1-8 fixtures

E98399

Outer casing (required, order separately)

Orma | Outer-casing



type

PVC

Ø in

2.3

h. in

2.2


suitable for


Orma - Techo67 3W

E98057

Orma_Q | Drive-over spotlight | powerLED 3W 350 mA







type

SteelAlu

CRI 80

E96099

color

2700 K

408 lm

M

15°

15

3000 K

435 lm

W

30°

30

4000 K

465 lm

N

60°

60

power supply options (remote only)

ECO30W-350

0-10V EldoLED ECOdrive 30W, for 1-5 fixtures

SOLO50W-350

0-10V EldoLED SOLOdrive 50W, for 1-10 fixtures

SOLO100W-350


0-10VEldoLED SOLOdrive 100W, for 1-20 fixtures


E98057

Outer casing (required, order separately)

Orma_Q | Drive-over spotlight | powerLED 6W 350 mA







type

SteelAlu

CRI 80

E93981

color

2700 K

816 lm

M

8°

08

3000 K

870 lm

W

30°

30

4000 K

930 lm

N

60°

60

Diff.

00

power supply options (remote only)

ECO30W-350

0-10V EldoLED ECOdrive 30W, for 1-2 fixtures

SOLO50W-350

0-10V EldoLED SOLOdrive 50W, for 1-4 fixtures

SOLO100W-350


0-10VEldoLED SOLOdrive 100W, for 1-8 fixtures


E98399

Outer casing (required, order separately)

Orma_QI | Drive-over spotlight | powerLED 3W 350 mA | stainless steel







type

Steel

CRI 80

E96101

color

2700 K

408 lm

M

15°

15

3000 K

435 lm

W

30°

30

4000 K

465 lm

N

60°

60

power supply options (remote only)

ECO30W-350

0-10V EldoLED ECOdrive 30W, for 1-5 fixtures

SOLO50W-350

0-10V EldoLED SOLOdrive 50W, for 1-10 fixtures

SOLO100W-350


0-10VEldoLED SOLOdrive 100W, for 1-20 fixtures


E98057

Outer casing (required, order separately)

Orma_QI | Drive-over spotlight | powerLED 6W 350 mA | stainless steel







type

Steel

CRI 80

E93992

color

2700 K

816 lm

M

8°

08

3000 K

870 lm

W

30°

30

4000 K

930 lm

N

60°

60

Diff.

00

power supply options (remote only)

ECO30W-350

0-10V EldoLED ECOdrive 30W, for 1-2 fixtures

SOLO50W-350

0-10V EldoLED SOLOdrive 50W, for 1-4 fixtures

SOLO100W-350

0-10VEldoLED SOLOdrive 100W, for 1-8 fixtures

E98399

Outer casing (required, order separately)

Orma | Outer-casing



type

PVC

Ø in

4.2

h. in

2.6

suitable for

Orma 6W

E98399

35

Linea Light

inter-lux.com/linealight

36

This drive-over uplight, offering directional and non-directional emissions, is available in several versions with many different finishes, optics and shapes and features **high energy efficiency** and **maximum external protection**. Suelo is visual comfort, performance and the reliability of the Aqua-Stop system.

Passive heat dissipation
Aluminum dissipating casing

Light management
Protective shade with black silk-screened pattern along the edge for glare reduction

Sturdy appearance
Sturdy flange available in three different material and finish versions




Suelo_R

	body	driver	power	size	optics
	Suelo_R	aluminum	 8W	Ø 4.7 in	30° - 50° - 60° - Asymmetric
			 13W 25W	Ø 7.9 in Ø 11.4 in	5° - 15° - 30° - 60° - Diffused - Asymmetric
	Suelo_RJ	aluminum 	 8W	Ø 4.7 in	15° - 30° - 60°
			 13W 25W	Ø 7.9 in Ø 11.4 in	
	Suelo_RI	stainless steel	 13W 20W	Ø 7.1 in Ø 12 in	15° - 30° - 60° - Diffused - Asymmetric
	Suelo_RJI	stainless steel 	 13W 20W	Ø 7.1 in Ø 12 in	15° - 30° - 60°

Suelo_Q

	body	driver	power	size	optics
	Suelo_Q	aluminum	 3W 6W	Ø 2.8 in Ø 4.7 in	30° - 50° - 70° - Diffused 10° - 30° - 50° - 120° - Diffused
			 6W	Ø 4.7 in	10° - 30° - 50° - 120°
	Suelo_QI	stainless steel	 3W	Ø 2.8 in	30° - 50° - 70° - Diffused
			 6W	Ø 4.7 in	10° - 30° - 50° - 120° - Diffused
	Suelo_QJI	stainless steel 	 6W	Ø 4.7 in	10° - 30° - 50° - 120°

Suelo_R | Drive-over spotlight | powerLED 8W 630 mA




type			color			optic		
Grey	CRI 80	E93997	2700 K	610 lm	M	15°	15	
Chrome	CRI 80	E93996	3000 K	644 lm	W	30°	30	
Steel	CRI 80	E93998	4000 K	711 lm	N	60°	60	
						Asym.	07	

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	E98121
0-10V EldoLED ECOdrive 30W, for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-4 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-8 fixtures	Outer casing (required, order separately)



Suelo_RJ | Drive-over spotlight | powerLED 8W 630 mA | tilttable beam



type			color			optic		
Grey	CRI 80	E93957	2700 K	610 lm	M	15°	15	
Chrome	CRI 80	E93956	3000 K	644 lm	W	30°	30	
Steel	CRI 80	E93958	4000 K	711 lm	N	60°	60	

power supply options (remote only)


ECO30W-630	SOLO50W-630	SOLO100W-630	E98121
0-10V EldoLED ECOdrive 30W, for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-4 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-8 fixtures	Outer casing (required, order separately)



"H-Farm" - Treviso (Italy)



Suelo_R | Drive-over spotlight | powerLED 13W 350 mA




type		color			optic	
Grey	CRI 80	E96085				
		2700 K	1243 lm	M	15°	15
		3000 K	1338 lm	W	30°	30
		4000 K	1434 lm	N	60°	60
					Diff.	00

power supply options (remote only)



ECO30W-350	SOLO50W-350	SOLO100W-350	E84933
0-10V EldoLED ECOdrive 30W, for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-4 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-8 fixtures	Outer casing (required, order separately)

Suelo_RI | Drive-over spotlight | powerLED 13W 350 mA | stainless steel




type		color			optic	
Steel	CRI 80	E96083				
		2700 K	1243 lm	M	15°	15
		3000 K	1338 lm	W	30°	30
		4000 K	1434 lm	N	60°	60
					Diff.	00

power supply options (remote only)



ECO30W-350	SOLO50W-350	SOLO100W-350	E84933
0-10V EldoLED ECOdrive 30W, for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-4 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-8 fixtures	Outer casing (required, order separately)

Suelo_R | Walk-over spotlight | arrayLED 13W 350 mA




type		color			optic	
Grey	CRI 80	E95799				
		2700 K	1743 lm	M	Asym.	07
		3000 K	1863 lm	W		
		4000 K	1863 lm	N		

power supply options (remote only)



ECO30W-350	SOLO50W-350	SOLO100W-350	E84932
0-10V EldoLED ECOdrive 30W, for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-4 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-8 fixtures	Outer casing (required, order separately)

Suelo_RI | Walk-over spotlight | arrayLED 13W 350 mA | stainless steel




type		color			optic	
Steel	CRI 80	E95779				
		2700 K	1743 lm	M	Asym.	07
		3000 K	1863 lm	W		
		4000 K	1863 lm	N		

power supply options (remote only)



ECO30W-350	SOLO50W-350	SOLO100W-350	E84932
0-10V EldoLED ECOdrive 30W, for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-4 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-8 fixtures	Outer casing (required, order separately)

Suelo_RI | Drive-over spotlight | arrayLED 20W 580 mA | stainless steel




type		color			optic	
Steel	CRI 80	E96917				
		2700 K	2714 lm	M	15°	15
		3000 K	2900 lm	W	30°	30
		4000 K	2900 lm	N	60°	60
					Asym.	07
					Diff.	00

power supply options (remote only)



ECO30W-580	SOLO50W-580	SOLO100W-580	E98353
0-10V EldoLED ECOdrive 30W, for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-4 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-8 fixtures	Outer casing (required, order separately)

Suelo_R | Drive-over spotlight | arrayLED 25W 720 mA




type		color			optic	
Grey	CRI 80	E96087				
		2700 K	3400 lm	M	15°	15
		3000 K	3637 lm	W	30°	30
		4000 K	3909 lm	N	60°	60
					Asym.	07
					Diff.	00

power supply options (remote only)



ECO30W-720	SOLO50W-720	SOLO100W-720	E98353
0-10V EldoLED ECOdrive 30W, for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-4 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-8 fixtures	Outer casing (required, order separately)

Suelo_RJ | Drive-over spotlight | powerLED 13W 350 mA | tiltable beam




type			color			optic		
Grey	CRI 80	E96086	2700 K	1243 lm	M	15°	15	
			3000 K	1338 lm	W	30°	30	
			4000 K	1434 lm	N	60°	60	

power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350	E84933
0-10V EldoLED ECOdrive 30W, for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-4 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-8 fixtures	Outer casing (required, order separately)

Suelo_RJI | Drive-over spotlight | powerLED 13W 350 mA | stainless steel | tiltable beam




type			color			optic		
Steel	CRI 80	E96084	2700 K	1243 lm	M	15°	15	
			3000 K	1338 lm	W	30°	30	
			4000 K	1434 lm	N	60°	60	

power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350	E84933
0-10V EldoLED ECOdrive 30W, for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-4 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-8 fixtures	Outer casing (required, order separately)

Suelo_RJ | Drive-over spotlight | arrayLED 25W 720 mA | tiltable beam




type			color			optic		
Grey	CRI 80	E96088	2700 K	3400 lm	M	15°	15	
			3000 K	3637 lm	W	30°	30	
			4000 K	3909 lm	N	60°	60	

power supply options (remote only)

ECO30W-720	SOLO50W-720	SOLO100W-720	E98353
0-10V EldoLED ECOdrive 30W, for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-4 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-8 fixtures	Outer casing (required, order separately)

Suelo_RJI | Drive-over spotlight | arrayLED 20W 580 mA | stainless steel | tiltable beam




type			color			optic		
Steel	CRI 80	E96918	2700 K	2714 lm	M	15°	15	
			3000 K	2900 lm	W	30°	30	
			4000 K	2900 lm	N	60°	60	

power supply options (remote only)

ECO30W-580	SOLO50W-580	SOLO100W-580	E98353
0-10V EldoLED ECOdrive 30W, for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-4 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-8 fixtures	Outer casing (required, order separately)

Suelo_RI | Drive-over spotlight | powerLED 13W 350 mA



type			color			optic		
Steel	CRI 80	E97366	2700 K	1243 lm	M	5°	05	
			3000 K	1338 lm	W			
			4000 K	1434 lm	N			



power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	E84932
0-10V EldoLED ECOdrive 30W, for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W, for 1-4 fixtures	0-10VEldoLED SOLOdrive 100W, for 1-8 fixtures	Outer casing (required, order separately)

The innovative narrow optics, slightly tapered, was especially designed to illuminate columns and tall plants.



Suelo_Q | Drive-over spotlight | powerLED 8W 630 mA





type			color			optic		
Grey	CRI 80	E94000	2700 K	610 lm	M	15°	15	
Chrome	CRI 80	E93999	3000 K	644 lm	W	30°	30	
Steel	CRI 80	E94001	4000 K	711 lm	N	60°	60	
						Asym.	07	

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	E98121
0-10V EIdoLED ECOdrive 30W, for 1-3 fixtures	0-10V EIdoLED SOLOdrive 50W, for 1-4 fixtures	0-10VEIdoLED SOLOdrive 100W, for 1-8 fixtures	Outer casing (required, order separately)

Suelo_QJ | Drive-over spotlight | powerLED 8W 630 mA | tilttable beam



type			color			optic		
Grey	CRI 80	E93960	2700 K	610 lm	M	15°	15	
Chrome	CRI 80	E93959	3000 K	644 lm	W	30°	30	
Steel	CRI 80	E93961	4000 K	711 lm	N	60°	60	

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	E98121
0-10V EIdoLED ECOdrive 30W, for 1-3 fixtures	0-10V EIdoLED SOLOdrive 50W, for 1-4 fixtures	0-10VEIdoLED SOLOdrive 100W, for 1-8 fixtures	Outer casing (required, order separately)

Suelo | In-ground outer-casing



type	Ø inch	h. inch	suitable for	
PVC	6.7	9.4	Suelo_R 13W optics 07	E84932

Suelo | In-ground outer-casing



type	Ø inch	h. inch	suitable for	
PVC	6.7	6.1	Suelo_R 13W optics 15, 30, 60, 00 Suelo_RJ 13W	E84933

Suelo | In-ground outer-casing



type	Ø inch	h. inch	suitable for	
PVC	10.6	10.2	Suelo_R 30W Suelo_RJ 30W	E98353

Suelo | In-ground outer-casing



type	Ø inch	h. inch	suitable for	
PVC	4.3	5.5	Suelo (no driver)	E98121

Suelo | In-ground outer-casing



type	Ø inch	h. inch	suitable for	
PVC	4.3	8.7	Suelo (with driver)	E98122

