



MOUNTING INSTALLATION STEPS

TURN OFF MAIN POWER
BEFORE PROCEEDING!


Step 1: Cut Hole in the Ceiling and clear insulation as shown. The 14" space is made to accommodate the Driver (A) and 6" of clearance. (Refer to Ceiling Thickness Key before installing)

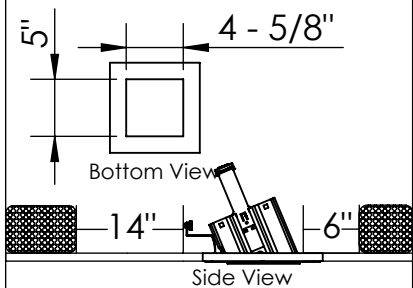


Step 2: Locate the AC Power, and Dimming Leads if required. Then pull them through the hole.



Step 3: Pull AC Power and Dimming Leads through Housing (B).

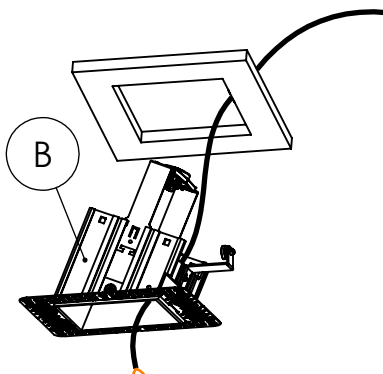


Step 4A: Position the Housing (B) into hole and push it all the way in. Screw down the Housing (B) into the ceiling using holes in the lattice.

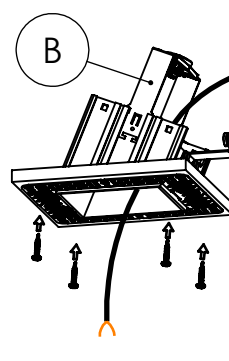


OR


Step 4B: Before placement into the ceiling, push large Mounting Clips (C) into their slots until the first tabs engage. Then insert Housing (B) into the ceiling and push the small Mounting Clips (D) into their respective slots as shown. Make sure that each clip is pushed until the housing is secure in the ceiling.

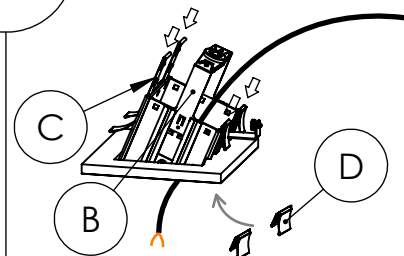


Step 5: Once Housing (B) is flush with the ceiling and screwed down, plaster over the lattice.

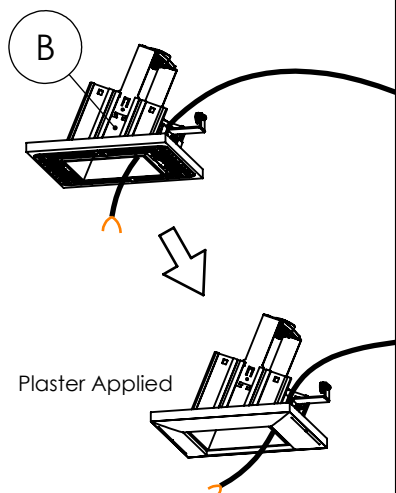


Step 6: Make the connection between the Driver (A) and AC Power/Dimming using the supplied connectors.

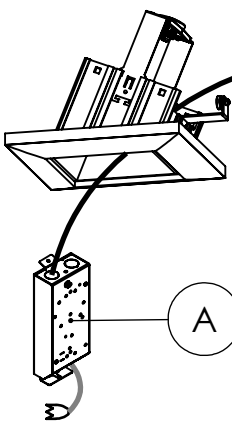


Step 7: Push the Driver (A) up through the Housing (B). Then attach it to the Housing (B), and tighten the thumb screw (2).

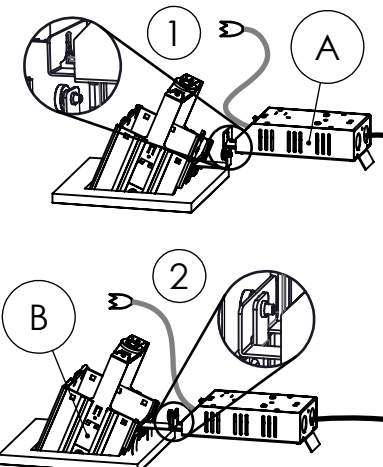

Step 8: Attach the Safety Cable to the Light Engine (E)(1). Then make the connection between the Driver (A) and the Light Engine (E) using the supplied connectors (2).

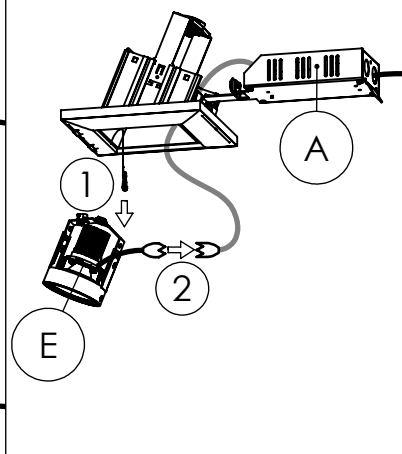

Step 9: Push the Light Engine (E) up into the Housing (B) until it locks into the spring latch. Tilt light into desired position (max 30 degree tilt).

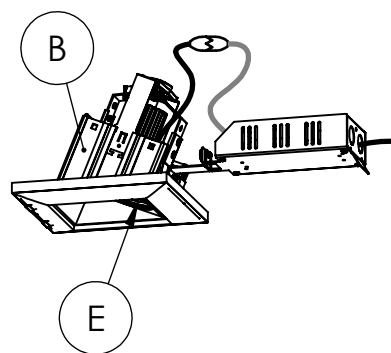

Ceiling Thickness Key

Material	Wood	Gypsum	Metal	Tile
Minimum	1/4"	1/2"	1/16"	1/2"
Maximum	1"	1"	11/16"	1"

