


# Sigma - Outdoor

## TECHNICAL SHEET

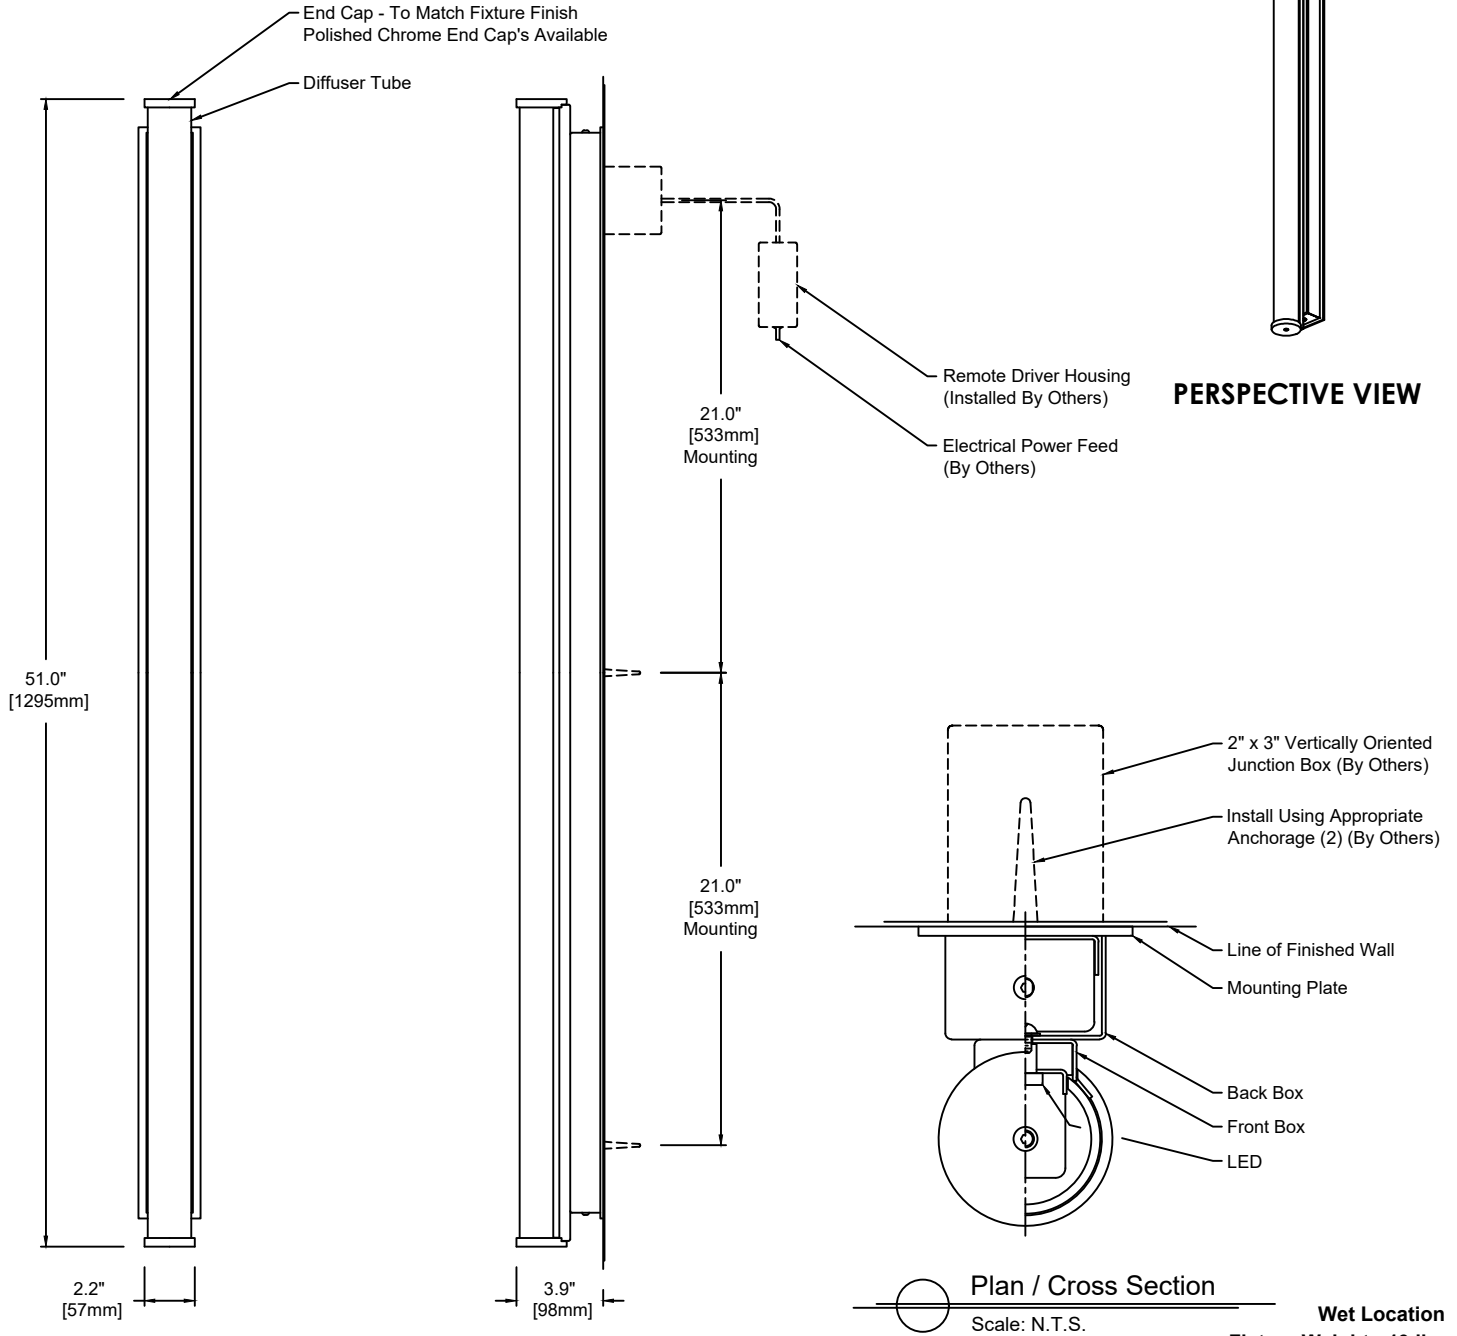

1740WL	W	51	M	830	U	S	SA	19	-
Model	Type	Size	Wattage	Color Temp	Voltage	Control	Diffuser	Finish	Options
	W - Wall	51"	M	830 - 3,000K 835 - 3,500K 840 - 4,000K	1 - 120 VAC only U - 120/277 V	S D010 DFPN L3DAE L3D0E	SA - Satin Clear Acrylic	19 - Painted Anodized Aluminum - RAL 9006 Matte 21 - Painted White - RAL 9010 Matte 22 - Painted Custom Color	EC - Chrome End Caps

### Wattage and Control

Control (Remote 24V):  
S - Non-Dim  
D010 - 0-10V 10%  
DFPN - Lutron Forward Phase 1%, 120VAC  
L3DAE - Lutron Hi-Lume 1% EcoSystem  
L3D0E - Lutron Hi-Lume Premier 0.1% EcoSystem

Wattage "M" - 19 Watt  
3,000K - 1,500 lm  
3,500K - 1,620 lm  
4,000K - 1,680 lm

Technical Data:  
Form - linear (tape), Operating voltage: 24VDC  
Color rendering index Ra min: 80 CRI  
Viewing angle: 120°  
Lifetime - L70: 50,000h  
IP67 rated for outdoor use  
Working temperature: -20°C to 50°C (-4°F to 122°F)

Remote Drivers:  
Max. wiring distance / Load

	Osram			Lutron	
Wire Gauge	≤48W	≤72W	≤96W	≤40W	≤96W
#18AWG	37'	25'	18'	15'	25'
#16AWG	59'	39'	29'	25'	40'
#14AWG	95'	63'	47'	40'	60'

**inter•lux**

