



Wing

TECHNICAL SHEET

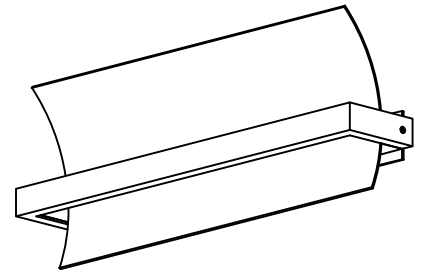

PERSPECTIVE VIEW

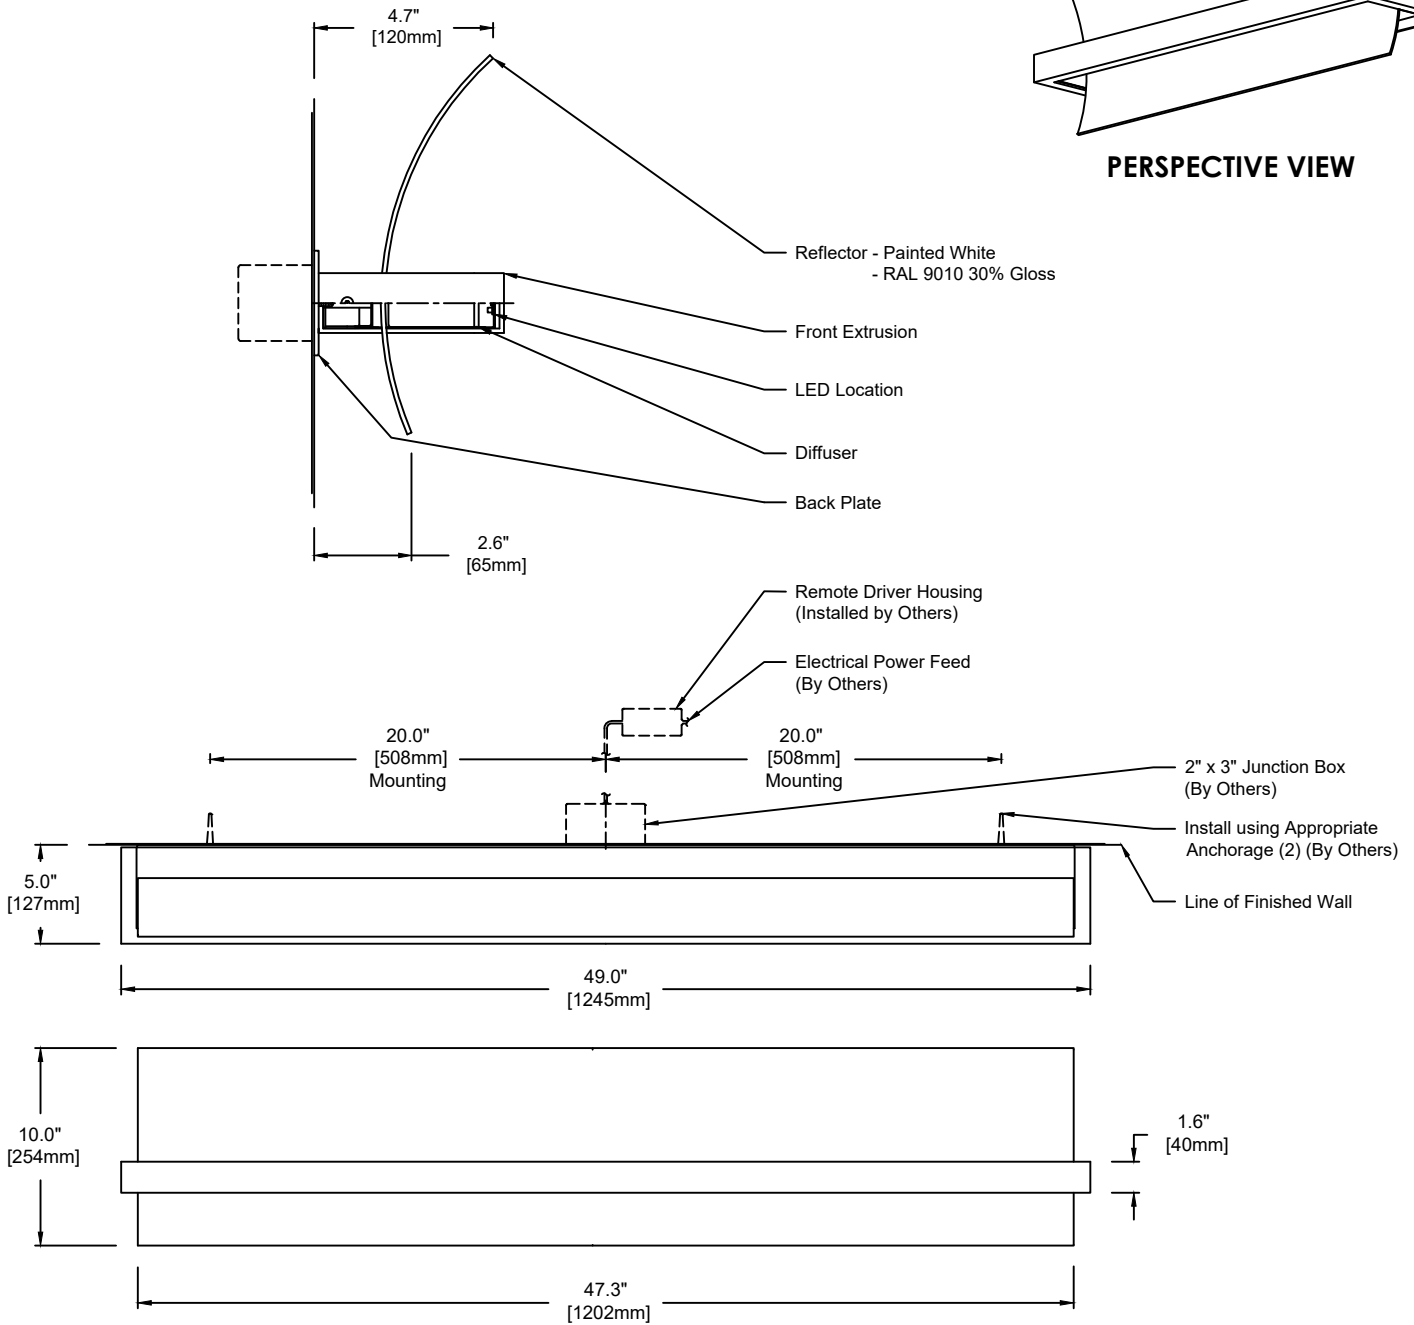

1820	W	49	M	830	U	S	SW	19
Model	Type	Size	Wattage	Color Temp	Voltage	Control	Diffuser	Finish
	W - Wall	49"	L M H	827 - 2,700K 830 - 3,000K 835 - 3,500K 840 - 4,000K	1 - 120 VAC only U - 120/277 V	S D010 DFPN L3DAE L3D0E	SW - Satin Opal Acrylic	19 - Painted Anodized Aluminum - RAL 9006 Matte 21 - Painted White - RAL 9010 Matte 22 - Painted Custom Color
Wattage and Control								
Control (Remote 24V): S - Non-Dim D010 - 0-10V 10% DFPN - Lutron Forward Phase 1%, 120VAC L3DAE - Lutron Hi-Lume 1% EcoSystem L3D0E - Lutron Hi-Lume Premier 0.1% EcoSystem			Wattage "L" - 12 Watt 2,700K - 1,533 lm 3,000K - 1,533 lm 3,500K - 1,595 lm 4,000K - 1,625 lm		Wattage "H" - 38 Watt 2,700K - 4,500 lm 3,000K - 4,500 lm 3,500K - 4,684 lm 4,000K - 4,776 lm		Remote Drivers: Max. wiring distance / Load Osram Lutron	
			Wattage "M" - 23 Watt 2,700K - 2,848 lm 3,000K - 2,848 lm 3,500K - 2,967 lm 4,000K - 3,025 lm		Technical Data: Form - linear, Operating voltage: 24VDC Color rendering index Ra min: 82 CRI, Available in 90 CRI Viewing angle: 110° Lifetime - L70: 60,000h Working temperature: -20°C to 60°C (-4°F to 140°F)		Wire Gauge ≤48W ≤72W ≤96W ≤40W ≤96W #18AWG 37' 25' 18' 15' 25' #16AWG 59' 39' 29' 25' 40' #14AWG 95' 63' 47' 40' 60'	

