



# City - Indoor

## TECHNICAL SHEET



PERSPECTIVE VIEW

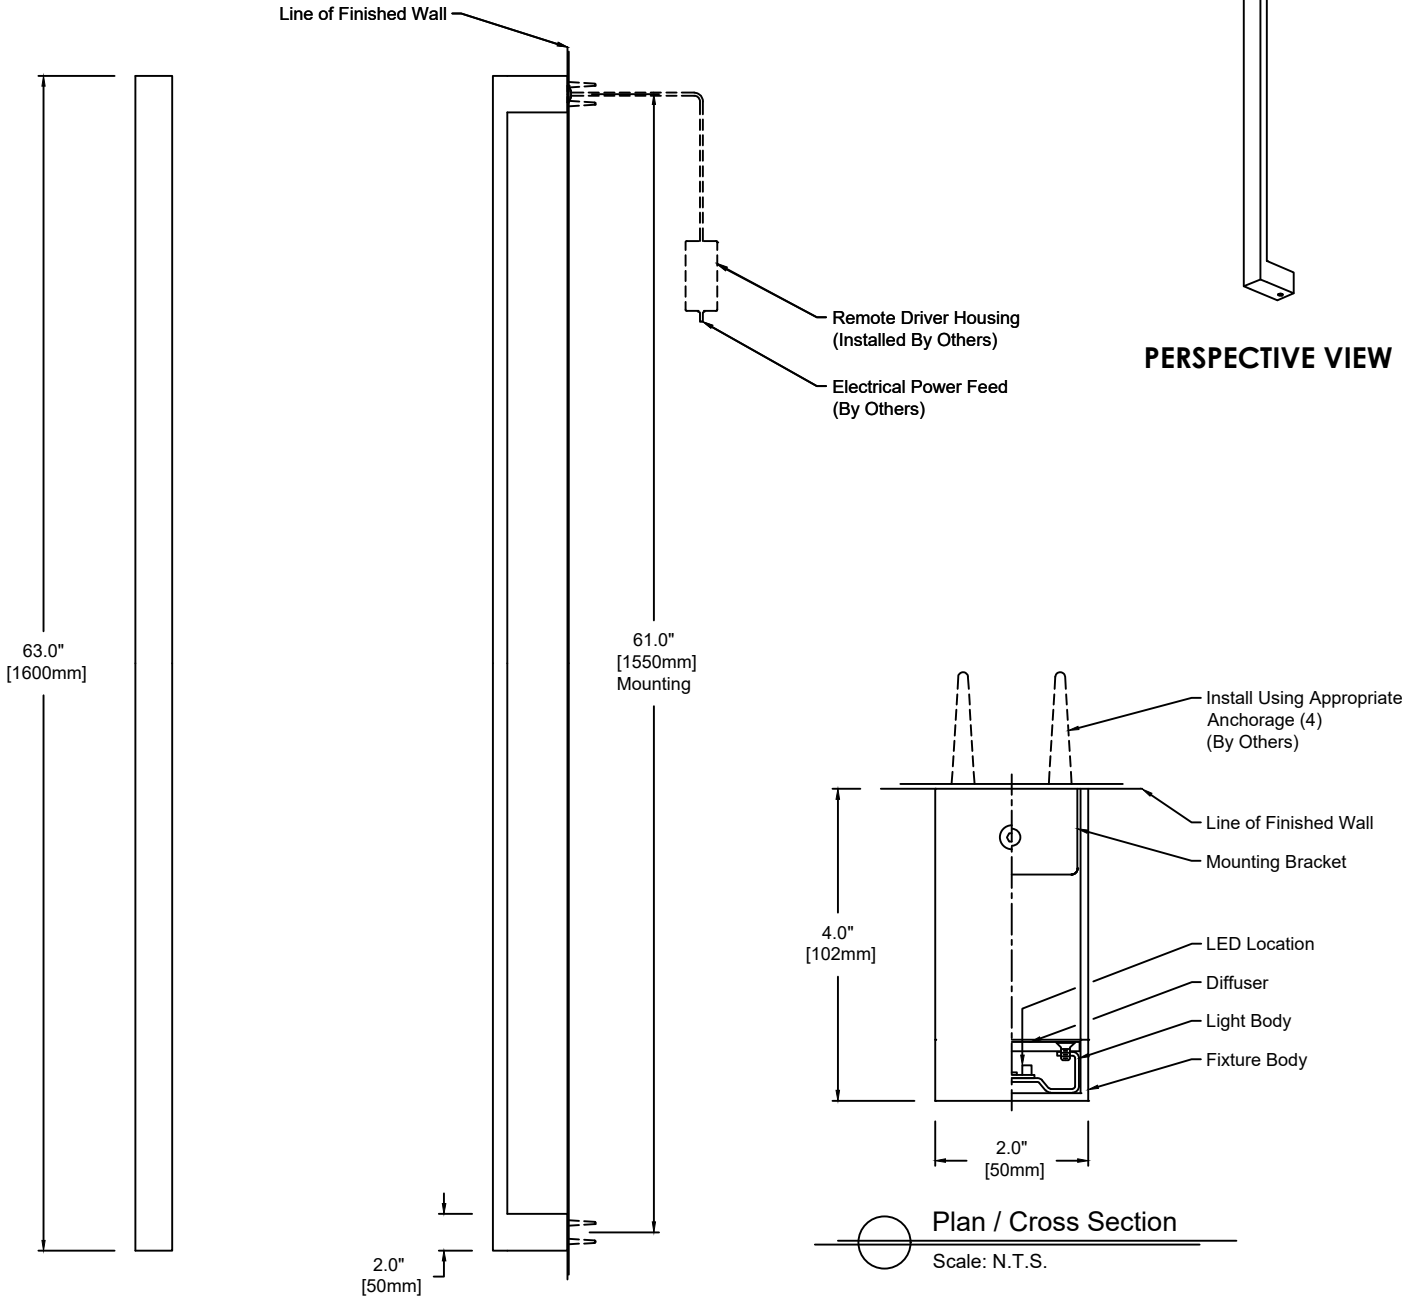

Fixture Weight : 5.5 lbs

1825	W	63	M	830	U	S	SA	19
Model	Type	Size	Wattage	Color Temp	Voltage	Control	Diffuser	Finish
	W - Wall	63"	L M H	827 - 2,700K 830 - 3,000K 835 - 3,500K 840 - 4,000K	1 - 120 VAC only U - 120/277 V	S D010 DFPN L3DAE L3D0E	SA - Satin Clear Acrylic	19 - Painted Anodized Aluminum - RAL 9006 Matte 21 - Painted White - RAL 9010 Matte 26 - Painted Black - RAL 9005 Matte 22 - Painted Custom Color

**Wattage and Control**

Control (Remote 24V):  
 S - Non-Dim  
 D010 - 0-10V 10%  
 DFPN - Lutron Forward Phase 1%, 120VAC  
 L3DAE - Lutron Hi-Lume 1% EcoSystem  
 L3D0E - Lutron Hi-Lume Premier 0.1% EcoSystem

Wattage "L" - 15 Watt  
 2,700K - 1,933 lm  
 3,000K - 1,933 lm  
 3,500K - 2,011 lm  
 4,000K - 2,049 lm

Wattage "M" - 29 Watt  
 2,700K - 3,591 lm  
 3,000K - 3,591 lm  
 3,500K - 3,741 lm  
 4,000K - 3,814 lm

Wattage "H" - 49 Watt  
 2,700K - 5,674 lm  
 3,000K - 5,674 lm  
 3,500K - 5,906 lm  
 4,000K - 6,022 lm

Technical Data:  
 Form - linear, Operating voltage: 24VDC  
 Color rendering index Ra min: 82 CRI, Available in 90 CRI  
 Viewing angle: 110°  
 Lifetime - L70: 60,000h  
 Working temperature: -20°C to 60°C (-4°F to 140°F)

Remote Drivers:  
 Max. wiring distance / Load

Wire Gauge	Osram			Lutron	
	≤48W	≤72W	≤96W	≤40W	≤96W
#18AWG	37'	25'	18'	15'	25'
#16AWG	59'	39'	29'	25'	40'
#14AWG	95'	63'	47'	40'	60'

