

**Constant current fixtures are to be wired in SERIES and require a MINIMUM and MAXIMUM number of fixtures connected to a driver as indicated on the following page.**

**NOTE:**

**Powering or testing less than the minimum number of fixtures per driver**

**or**

**connecting fixtures with the driver powered (live wired)**

**or**

**wiring them in parallel will IMMEDIATELY and PERMANENTLY DESTROY the fixtures and void the warranty.**


**Carefully read instructions prior to installation and testing.**

# Constant Current drivers

## Wiring Key Points

1. This product shall be installed by a qualified electrician.
2. Make sure the main power supply to the driver is turned off when wiring either the LEDs or driver.
3. LEDs shall be wired in series as shown in wiring diagram. CAUTION: parallel wiring will damage LEDs.
4. Wire shall be 18 awg stranded minimum. Large gauge wire shall be used to limit voltage drop in order to maintain the proper operating voltage. Take every precaution to avoid interference from other electrical circuits and equipment.
5. Dimming circuits are more sensitive to voltage drop and electrical interference from other electrical sources.
6. Isolating LED wiring by dedicated circuit for each control zone is recommended.
7. Contractor shall verify the fixture quantities connected to the driver are compatible with the driver's specifications prior to energizing the circuit.
8. All Class II power cable remote wiring by others.

**LED's can be permanently damaged if these points are not followed**

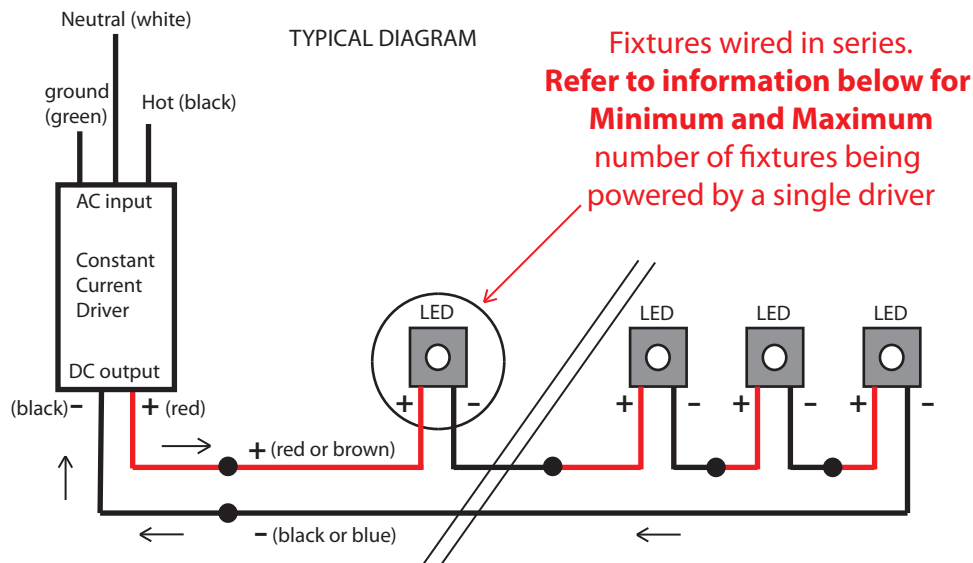

**Inter-lux Part #  
LUT40-xAxxx-DFPN**

## Driver options:

Driver	AC Input	Dimming	Minimum number of fixtures	Maximum number of fixtures
LTEA4U1U-KL-xAxxx	120V Only	Fwd phase w/neutral		
n/a	120V Only	NON-DIM		
n/a	120V Only	NON-DIM		

Please note: Dimming/control wiring not shown in the diagram above.

**inter•lux**

Project:	Type:	Date:
Manufacturer: LINEALIGHT	Fixture:	

## Hi-lume 1% 2-Wire LED Driver Forward-Phase Control Overview

The Hi-lume 1% 2-Wire LED Driver is a high-performance LED driver that provides smooth, continuous, flicker-free, 1% dimming for virtually any LED fixture, whether it requires constant-current or constant-voltage. Formerly part of the A-series family, it is the most versatile LED driver offered today due to its compatibility with a wide variety of LED arrays, multiple form factors, and numerous control options.

### Features

- UL® Listed Class P
- Continuous, flicker-free dimming from 100% to 1%.<sup>1</sup>
- Guaranteed compatibility with selected Maestro Wireless, RadioRA 2, HomeWorks QS, GRAFIK Eye QS, GRAFIK Systems, Quantum, and C•L dimmers. Please see **Compatible Controls** chart or contact Lutron for details regarding compatible controls.
- QwikFig compatible. For more information please refer to Lutron P/N 041473 at [www.lutron.com](http://www.lutron.com) (K and M case only).
- 100% performance tested at factory.
- A rated lifetime of 50,000 hours @  $t_c = 149^\circ\text{F}$  ( $65^\circ\text{C}$ ).
- Remote-mount options for United States and Canada.
- NOM certified option for Mexico.
- Type TL Rated.<sup>2</sup>
- FCC Part 15
  - Class A (case type K and M)
  - Class B (case type KL)
- Pulse width modulation (PWM) or constant-current reduction (CCR) dimming methods available. See Application Note #360 (048360) at [www.lutron.com](http://www.lutron.com) for details.
- RoHS Compliant.
- ENERGY STAR Luminaires V2.0 and California Title 24 JA8 compliant models available.
- SSL7A-2015 compatible, above 20 W or more of rated input power.
- For more information please go to: [www.lutron.com/hilume1led](http://www.lutron.com/hilume1led)

<sup>1</sup> Light output at 1% depends on the efficacy of the light engine used with the driver.

<sup>2</sup> Visit "Online Certificates Directory" at [www.ul.com](http://www.ul.com), enter file number "E322469" to determine the Type TL numbers specific to LTE model Lutron LED Driver.



### Case type K

3.00 in (76 mm) W x 1.00 in (25 mm) H x  
4.90 in (124 mm) L



### Case type M

1.18 in (30 mm) W x 1.00 in (25 mm) H x  
14.25 in (362 mm) L



### Case type KL

K-case mounted on a 4.00 in (102 mm) W x  
1.50 in (38 mm) H x 4.00 in (102 mm) L junction  
box to provide wiring compartment

### LUTRON SPECIFICATION SUBMITTAL

<b>Job Name:</b>	<b>Model Numbers:</b>
<b>Job Number:</b>	

## Specifications

### Regulatory Approvals

- Meets ANSI C62.41 category A surge protection standards up to and including 4 kV.
- FCC Part 15
  - Class A (case type K and M)
  - Class B (case type KL)
- CAN ICES-005(A) (case type K and M)
- CAN ICES-005(B) (case type KL)
- Manufacturing facilities employ ESD reduction practices that comply with the requirements of ANSI/ESD S20.20.
- Lutron Quality Systems registered to ISO 9001.2015.
- UL® 8750 Class P Listed (K- and M- cases).
- UL® 8750 Listed, remote-mountable form factor (KL Case).
- Class 2 output available.
- “BLK” models (for use with Lutron QwikFig technology) along with LTEA4U1UKL-AV120 and LTEA4U1UKL-CV240 models are NOM certified and available for Mexico.
- LED drivers need to meet certain performance criteria in order for the completed luminaires to comply with the ENERGY STAR Luminaires V2.0 Specification. All models meet these performance criteria throughout their entire load compatibility regions. Refer to the load compatibility graph on each output range page. Consult Application Note #599, **ENERGY STAR Luminaires V2.0 and Lutron Drivers** at [www.lutron.com](http://www.lutron.com) for availability dates of compliant products.
- LED drivers need to meet certain performance criteria in order for the completed luminaires to comply with Title 24 requirements as detailed in CEC-400-2015-037-CMF. All models meet these performance criteria above a minimum output power in their compatibility regions. Refer to the load compatibility graph on each output range page for specific details. Consult **CEC-400-2015-032-CMF Section 6.2.7** for important information on meeting start-up time requirements with fade-in lighting.

### UL® 8750 Listed, Remote-Mountable Option

- cULus for United States and Canada available for certain operating regions.
- Pre-wired and installation ready.
- See **KL Case: Case Dimensions** page for more specific details regarding UL listed option.
- Integral junction box to save time.
- For maximum driver-to-LED light engine wire length, see **Driver Leads** section near the end of this document.

### Environmental

- Sound Rating: Inaudible in 27 dB ambient.
- Relative Humidity: Maximum 90% non-condensing.
- Minimum operating ambient temperature  $t_a = 32\text{ }^\circ\text{F}$  ( $0\text{ }^\circ\text{C}$ ).<sup>1</sup>

<sup>1</sup> Where  $t_a$  is the temperature of the air directly surrounding the driver.

## LUTRON SPECIFICATION SUBMITTAL

Job Name:	Model Numbers:
Job Number:	

## Specifications *(continued)*

### Performance

- Dimming Range: 100% to 1%.
- Operating Voltage: 120 V~ at 50/60 Hz
- Requires Forward Phase Control; please see **Compatible Controls** chart.
- A rated lifetime of 50,000 hours @  $t_c = 149^\circ\text{F}$  ( $65^\circ\text{C}$ ).
  - For rated warranty,  $t_c$  not to exceed the maximum rated temperatures.<sup>1</sup>
- Patented thermal foldback protection.
- At turn-on, lighting will fade smoothly to the desired light level without decreasing or flashing to full brightness.
- Non-volatile memory restores all driver settings after power failure.
- Inrush Current: < 2 A.
- Inrush Current Limiting Circuitry: eliminates circuit breaker tripping, switch arcing and relay failure.
- Open circuit protected.
- Short circuit protected.
- Turn-on time:  $\leq 0.5$  seconds to first light.
- PWM Dimming Frequency: 550 Hz.<sup>2</sup>

### Driver Wiring & Mounting

- Driver is grounded by a mounting screw to the grounded fixture (or by terminal connection on the K case).
- Terminal blocks on the driver accept one solid wire per terminal from 18 AWG to 16 AWG ( $0.75\text{ mm}^2$  to  $1.5\text{ mm}^2$ ).
- Fixture must be grounded in accordance with local and national electrical codes.
- For maximum driver-to-LED light engine wire length, see charts in **Driver Leads** section at the end of the document.

<sup>1</sup> Installer is responsible for ensuring that the driver case temperature does not exceed the maximum rated temperature.

<sup>2</sup> Does not apply to CCR dimming method drivers.

## LUTRON SPECIFICATION SUBMITTAL

Job Name:	Model Numbers:
Job Number:	

## How to Select the Correct LED Driver for Your Load

**Note:** Try our LED Driver Selection Tool online at [www.lutron.com/leddrivertool](http://www.lutron.com/leddrivertool)

1. Review the specifications of the LED load.
  - a. Identify if the LED load requires a “constant current” or a “constant voltage” driver. Contact the LED load manufacturer for information on the type of load.
  - b. Identify the minimum and maximum operating voltage of the LED load at the desired operating current. This “current” will be the rated output current of the LED driver. Consult the LED load manufacturer for any questions.

The examples below are for a Class 2 constant current application:

Example 1: A Class 2 LED load that is rated at 1 A and 38 V<sub>nom</sub> nominally, and has an output voltage range of 36–40 V<sub>op</sub> (at 1 A) due to unit-to-unit variation, temperature, etc.

Example 2: A Class 2 LED load that is rated at 1 A and 40 V<sub>nom</sub> nominally, and has an output voltage range of 38–42 V<sub>op</sub> (at 1 A) due to unit-to-unit variation, temperature, etc.

2. Determine the proper operating range of the LED driver.

- a. Identify the output current range(s) of the driver family that includes the desired current.

Examples 1 & 2: Only “F”, “I”, “J”, and “Z” models meet the current range of the selected load (1 A).

### LED Load Output Range (see the following pages for more detail):

#### Class 2 Constant-Voltage

A = 10.0 V–12.0 V\*

B = 12.5 V–20.0 V\*†

C = 20.5 V–24.0 V†

D = 24.5 V–38.0 V†

#### Isolated Non-Class 2 Constant-Voltage

X = 38.5 V–60.0 V†

#### Class 2 Constant-Current

E = 0.20 A–0.50 A 30 V–54 V

F = 0.51 A–1.00 A 30 V–54 V†

G = 0.20 A–0.70 A 8 V–20 V

H = 0.20 A–0.70 A 15 V–38 V

I = 0.71 A–1.05 A 8 V–20 V

J = 0.71 A–1.05 A 15 V–38 V

K = 1.06 A–1.50 A 8 V–20 V

L = 1.06 A–1.50 A 15 V–38 V†

M = 1.51 A–2.10 A 8 V–19.9 V†

#### Isolated Non-Class 2 Constant-Current

Y = 0.20 A–0.50 A 30 V–60 V

Z = 0.51 A–1.00 A 30 V–60 V†

\* Available in K-case only.

† Output parameter is power-limited for these output ranges. Consult detailed specifications on the following pages for each range.

- b. Identify output voltage range(s) of the driver that includes the desired voltage range.

Examples 1 & 2: Out of the 3 models indicated in step 2a., only “F” and “Z” models meet the voltage requirement for the selected loads.

### LED Load Output Range (see the following pages for more detail):

#### Class 2 Constant-Voltage

A = 10.0 V–12.0 V\*

B = 12.5 V–20.0 V\*†

C = 20.5 V–24.0 V†

D = 24.5 V–38.0 V†

#### Isolated Non-Class 2 Constant-Voltage

X = 38.5 V–60.0 V†

#### Class 2 Constant-Current

E = 0.20 A–0.50 A 30 V–54 V

F = 0.51 A–1.00 A 30 V–54 V†

G = 0.20 A–0.70 A 8 V–20 V

H = 0.20 A–0.70 A 15 V–38 V

I = 0.71 A–1.05 A 8 V–20 V

J = 0.71 A–1.05 A 15 V–38 V

K = 1.06 A–1.50 A 8 V–20 V

L = 1.06 A–1.50 A 15 V–38 V†

M = 1.51 A–2.10 A 8 V–19.9 V†

#### Isolated Non-Class 2 Constant-Current

Y = 0.20 A–0.50 A 30 V–60 V

Z = 0.51 A–1.00 A 30 V–60 V†

\* Available in K-case only.

† Output parameter is power-limited for these output ranges. Consult detailed specifications on the following pages for each range.

Continued on next page

## LUTRON SPECIFICATION SUBMITTAL


<b>Job Name:</b>	<b>Model Numbers:</b>
<b>Job Number:</b>	

### How to Select the Correct LED Driver for Your Load *(continued)*

3. Identify if the driver needs to be Class 2. Examples 1 & 2: Out of the “F” and “Z” models, only the “F” model is Class 2

a. Examine the Load Compatibility graphs below for each output range to ensure that the voltage range of the LED load is within the safe operating area.


Example 1: The LED voltage range of 36 V<sub>DC</sub> to 40 V<sub>DC</sub> falls entirely within the operating area of output range F, so this is a compatible output range

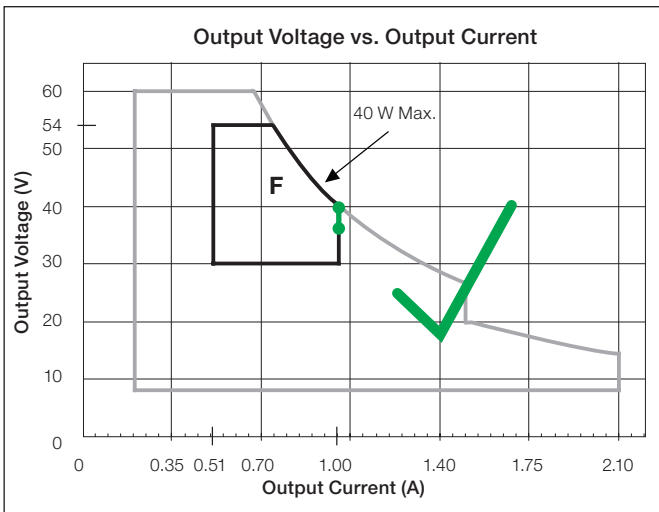

The model numbers for this example are:

- LTEA4U1UMN-FA100 M-Case, constant-current reduction dimming
- LTEA4U1UKL-FA100 UL® Listed, remote-mountable, constant-current reduction dimming
- LTEA4U1UKN-FA100 K-Case, non-studded, constant-current reduction dimming
- LTEA4U1UKS-FA100 K-Case, studded, constant-current reduction dimming

Example 2: The LED voltage range of 38 V<sub>DC</sub> to 42 V<sub>DC</sub> does not fall entirely within the operating area of output range F, so this is not a compatible output range.

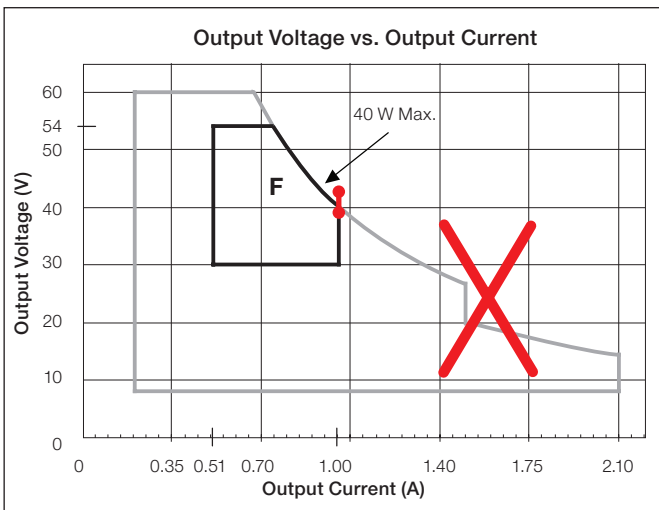

Job Name:	Model Numbers:
Job Number:	

## How to Build a Model Number: Hi-lume 1% 2-Wire LED Driver

LTEA4U1U -

**Example: LTEA4U1UKS-HC070**

For further assistance selecting your model number, contact our LED Center of Excellence at 1.877.DIM.LED8 or LEDs@lutron.com

**Case Size:**

K = Compact

M = Stick

**Current Level (for Constant-Current):**

020 = 0.20 A; 021 = 0.21 A...070 = 0.70 A...210 = 2.10 A

**Voltage Level (for Constant-Voltage):**

100 = 10.0 V; 105 = 10.5 V...600 = 60.0 V

**Case Style:**

S = Studded  
(K case only)

N = Non-Studded

L = Remote-mountable,  
(K case only)

**Driver Output:**

C = Constant-current driver  
with pulse width modulation (PWM) dimming

A = Constant-current driver  
with constant-current reduction (CCR) dimming

V = Constant-voltage driver  
with pulse width modulation (PWM) dimming

**LED Load Output Range (see the following pages for more detail):**

Class 2 Constant-Voltage

A = 10.0 V–12.0 V\*

B = 12.5 V–20.0 V\*†

C = 20.5 V–24.0 V†

D = 24.5 V–38.0 V†

Isolated Non-Class 2

Constant-Voltage

X = 38.5 V–60.0 V†

Class 2 Constant-Current

E = 0.20 A–0.50 A 30 V–54 V

F = 0.51 A–1.00 A 30 V–54 V†

G = 0.20 A–0.70 A 8 V–20 V

H = 0.20 A–0.70 A 15 V–38 V

I = 0.71 A–1.05 A 8 V–20 V

J = 0.71 A–1.05 A 15 V–38 V

K = 1.06 A–1.50 A 8 V–20 V

L = 1.06 A–1.50 A 15 V–38 V†

M = 1.51 A–2.10 A 8 V – 19.9 V†

Isolated Non-Class 2

Constant-Current

Y = 0.20 A–0.50 A 30 V–60 V

Z = 0.51 A–1.00 A 30 V–60 V†

\* Available in K-case only.

† Output parameter is power-limited for these output ranges. Consult detailed specifications on the following pages for each range.

**LUTRON** SPECIFICATION SUBMITTAL

Job Name:	Model Numbers:
Job Number:	



## “E” Output Range, Current Driver Models

Driver Type	Output Dimming Method	Output Voltage	Output Current	Output Power	Standards Recognition	UL® Listed, Remote-Mountable Available	Standards Recognition for UL® Listed, Remote-Mountable
Constant-Current Driver (Class 2)	Constant-Current Reduction (CCR)	30–54 V <sup>===</sup>	0.20–0.50 A	6–27 W		Yes	

When using QwikFig technology, these models can be built from the following bulk units in 10 mA increments:


K-case - LTEA4U1UKx-3ABLK\*; M-case - LTEA4U1UMN-3ABLK

\* x = studded (S) or non-studded (N)

### Typical Performance Specifications:


Parameter	Value	Test Conditions
Input Current	280 mA	t <sub>a</sub> = 25 °C, 0.50 A 27 W load, Maximum Light Output, K case 120 V <sup>~</sup> without a dimmer
Power Factor	0.99	
THD	11%	
Driver Efficiency	80%	

### Load Compatibility

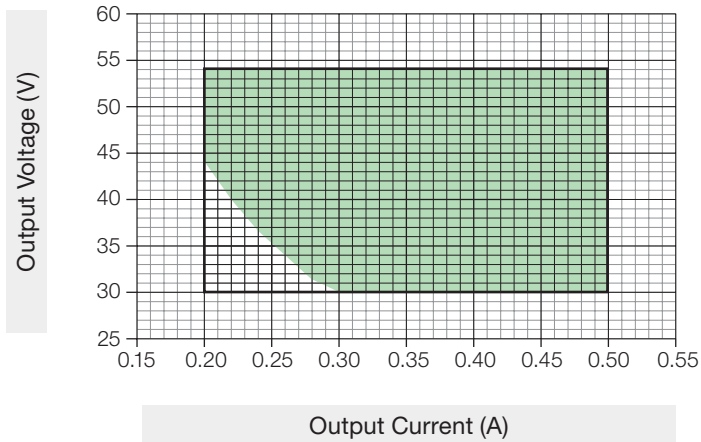


Key: ■ Green area shows California Title 24


### Typical Efficiency vs. Output Current

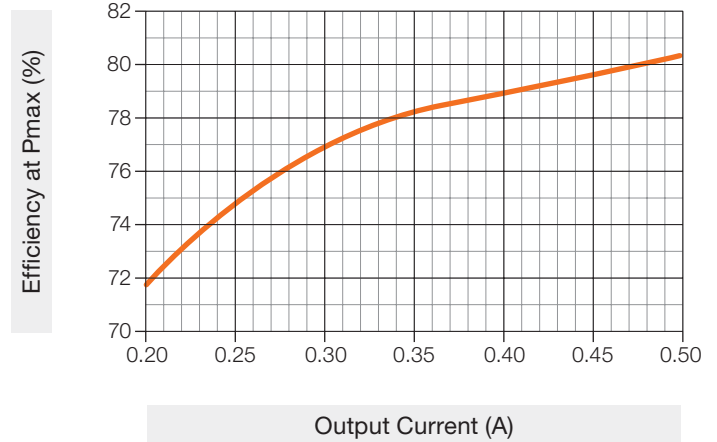

### Typical THD vs. Output Power

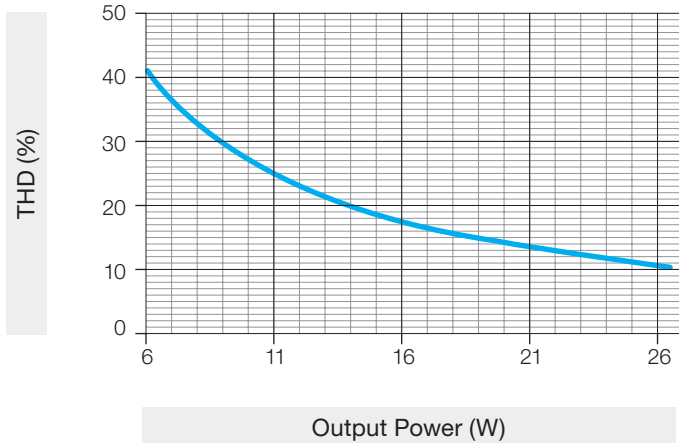

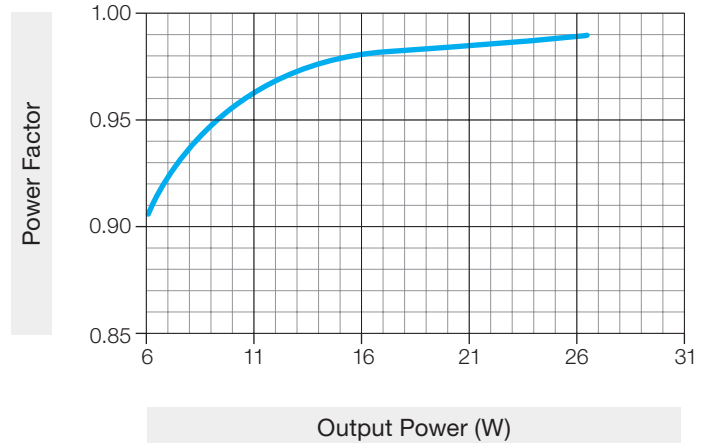

### Typical Power Factor vs. Output Power



## SPECIFICATION SUBMITTAL

Job Name:	Model Numbers:
Job Number:	

## “F” Output Range, Current Driver Models

Driver Type	Output Dimming Method	Output Voltage	Output Current	Output Power	Standards Recognition	UL® Listed, Remote-Mountable Available	Standards Recognition for UL® Listed, Remote-Mountable
Constant-Current Driver (Class 2)	Constant-Current Reduction (CCR)	30–54 V $\equiv$	0.51–1.00 A	15–40 W		Yes	

When using QwikFig technology, these models can be built from the following bulk units in 10 mA increments:


K-case - LTEA4U1UKx-3ABLK\*; M-case - LTEA4U1UMN-3ABLK

\* x = studded (S) or non-studded (N)

### Typical Performance Specifications:


Parameter	Value	Test Conditions
Input Current	430 mA	$t_a = 25^\circ\text{C}$ , 1.00 A 40 W load, Maximum Light Output, K case 120 V $\sim$ without a dimmer
Power Factor	0.98	
THD	11%	
Driver Efficiency	80%	

Load Compatibility

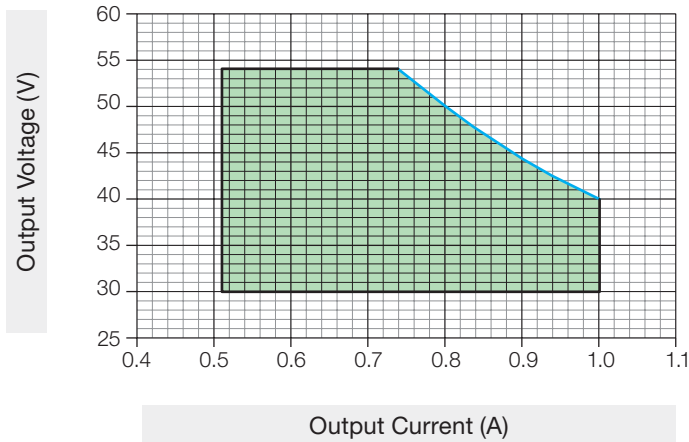


Key:   
■ Green area shows California Title 24 and Energy Star 2.0 Compliance   
— 40 W limited


Typical Efficiency vs. Output Current

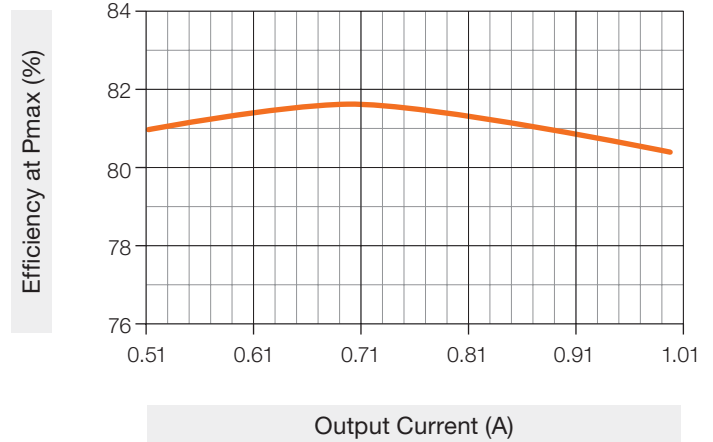

Typical THD vs. Output Power

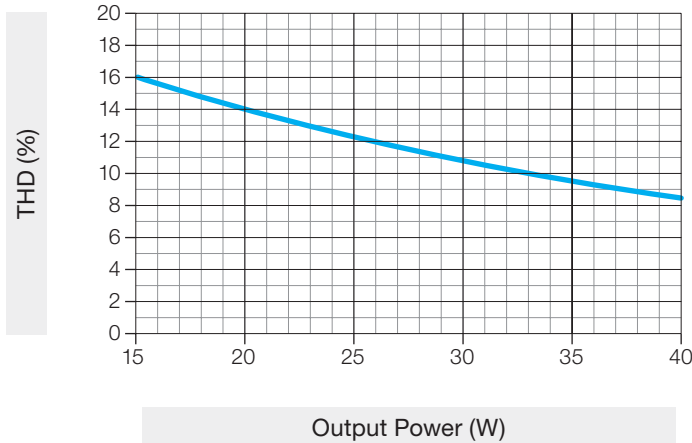

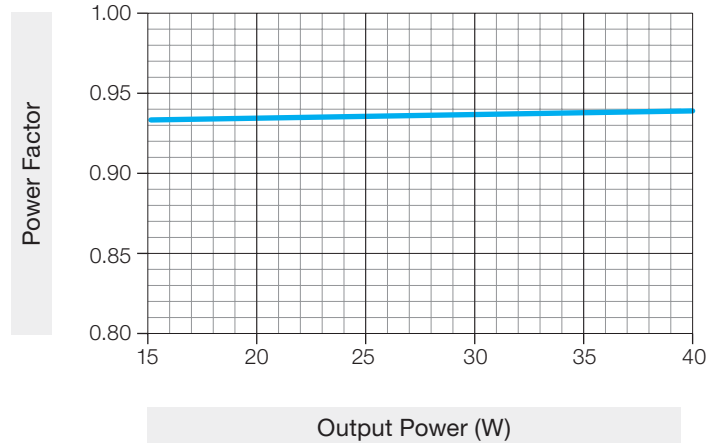

Typical Power Factor vs. Output Power



## SPECIFICATION SUBMITTAL

Job Name:	Model Numbers:
Job Number:	

## “G” Output Range, Current Driver Models

Driver Type	Output Dimming Method	Output Voltage	Output Current	Output Power	Standards Recognition	UL® Listed, Remote-Mountable Available	Standards Recognition for UL® Listed, Remote-Mountable
Constant-Current Driver (Class 2)	Pulse Width Modulation (PWM)	8–20 V PWM	0.20–0.70 A	2–14 W		Yes	
	Constant-Current Reduction (CCR)	8–20 V $\equiv$					

When using QwikFig technology, these models can be built from the following bulk units in 10 mA increments:


K-case - LTEA4U1UKx-2GBLK\*; M-case - LTEA4U1UMN-2CBLK

\* x = studded (S) or non-studded (N)


### Typical Performance Specifications:

Parameter	Value	Test Conditions
Input Current	170 mA	$t_a = 25^\circ\text{C}$ , 0.70 A 14 W load, Maximum Light Output, K case 120 V $\sim$ without a dimmer
Power Factor	0.97	
THD	23%	
Driver Efficiency	72%	

Load Compatibility

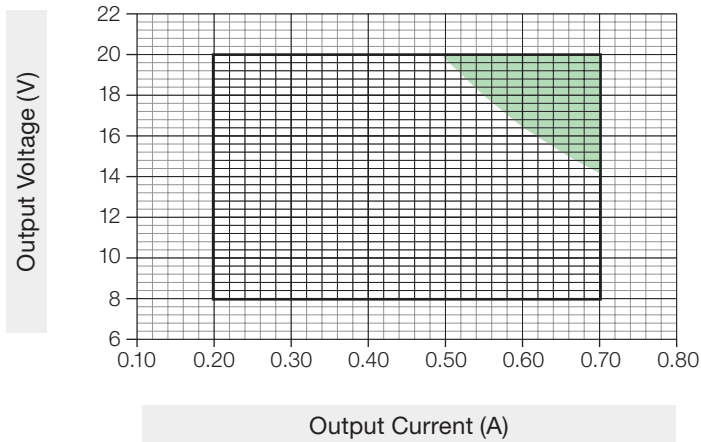


Typical Efficiency vs. Output Current

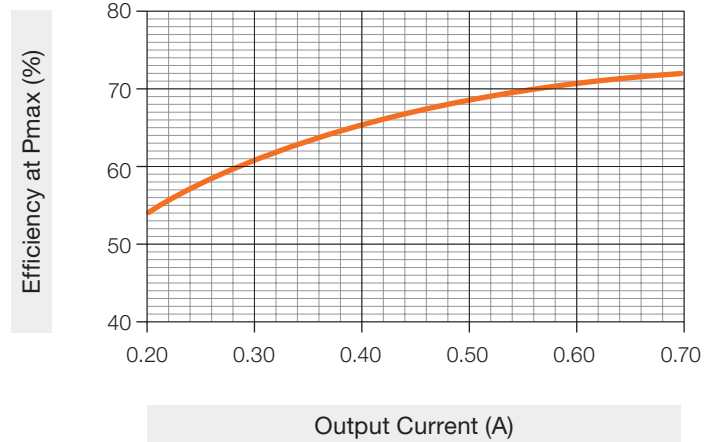


Key: ■ Green area shows California Title 24

Typical THD vs. Output Power

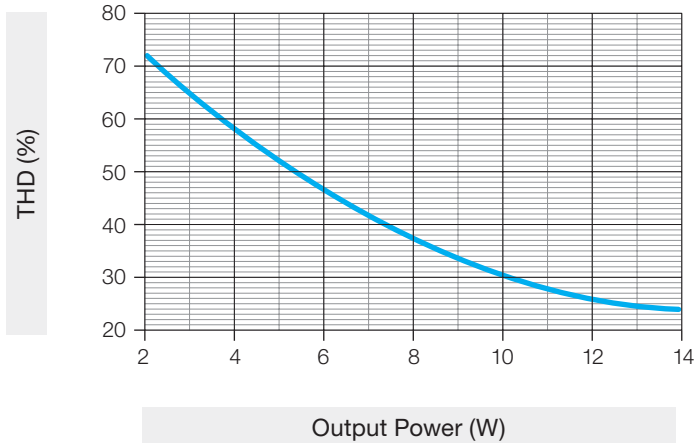

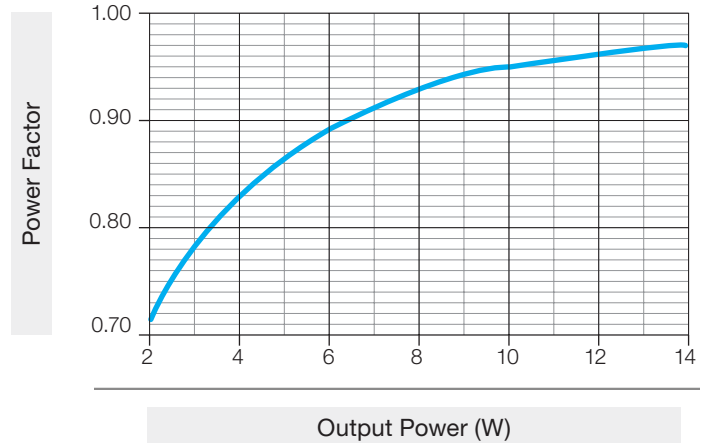

Typical Power Factor vs. Output Power



## SPECIFICATION SUBMITTAL

Job Name:	Model Numbers:
Job Number:	

## “H” Output Range, Current Driver Models

Driver Type	Output Dimming Method	Output Voltage	Output Current	Output Power	Standards Recognition	UL® Listed, Remote-Mountable Available	Standards Recognition for UL® Listed, Remote-Mountable
Constant-Current Driver (Class 2)	Pulse Width Modulation (PWM)	15–38 V PWM	0.20–0.70 A	3–26.6 W		Yes	
	Constant-Current Reduction (CCR)	15–38 V==					

When using QwikFig technology, these models can be built from the following bulk units in 10 mA increments:


K-case - LTEA4U1UKx-2HBLK\*; M-case - LTEA4U1UMN-2BBLK

\* x = studded (S) or non-studded (N)


### Typical Performance Specifications:

Parameter	Value	Test Conditions
Input Current	280 mA	$t_a = 25^\circ\text{C}$ ,
Power Factor	0.99	0.70 A 26 W load,
THD	10%	Maximum Light Output,
Driver Efficiency	79%	K case 120 V~ without a dimmer

Load Compatibility

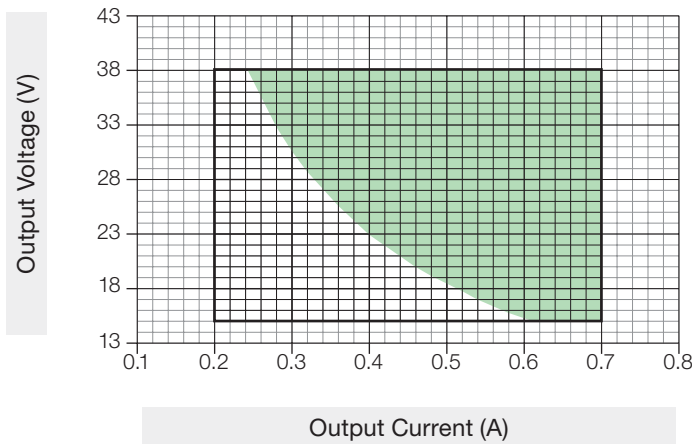


Typical Efficiency vs. Output Current

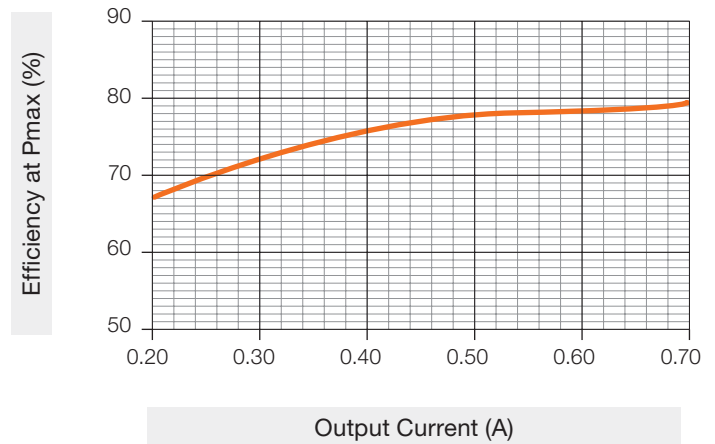


Key: ■ Green area shows California Title 24

Typical THD vs. Output Power

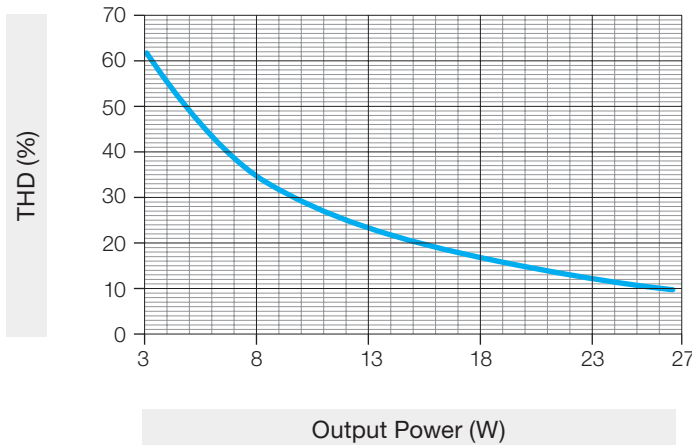

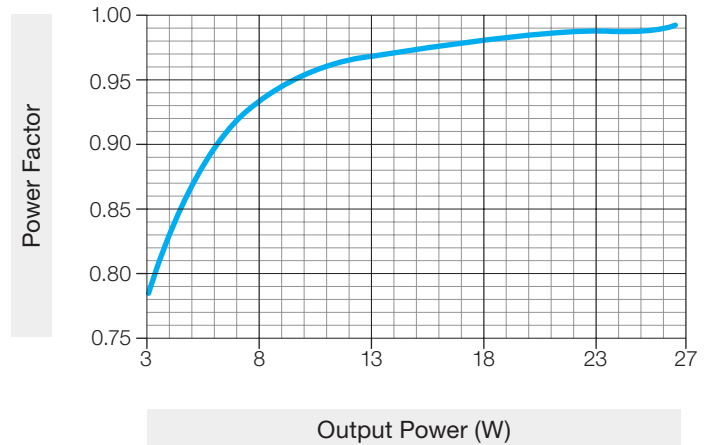

Typical Power Factor vs. Output Power



 SPECIFICATION SUBMITTAL

Job Name:	Model Numbers:
Job Number:	

### “I” Output Range, Current Driver Models

Driver Type	Output Dimming Method	Output Voltage	Output Current	Output Power	Standards Recognition	UL® Listed, Remote-Mountable Available	Standards Recognition for UL® Listed, Remote-Mountable
Constant-Current Driver (Class 2)	Pulse Width Modulation (PWM)	8–20 V PWM	0.71–1.05 A	6–21 W		Yes	
	Constant-Current Reduction (CCR)	8–20 V=					

When using QwikFig technology, these models can be built from the following bulk units in 10 mA increments:


K-case - LTEA4U1UKx-2RBLK\*; M-case - LTEA4U1UMN-2CBLK

\* x = studded (S) or non-studded (N)

#### Typical Performance Specifications:


Parameter	Value	Test Conditions
Input Current	240 mA	t <sub>a</sub> = 25 °C, 1.05 A 21 W load, Maximum Light Output, K case
Power Factor	0.97	
THD	20%	
Driver Efficiency	76%	
		120 V~ without a dimmer

Load Compatibility

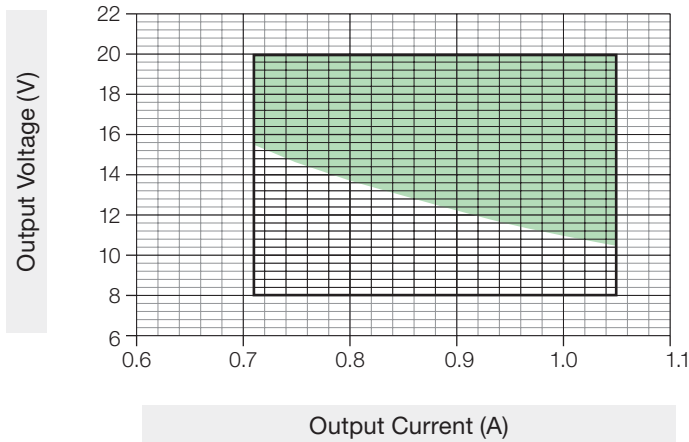


Key: ■ Green area shows California Title 24


Typical Efficiency vs. Output Current

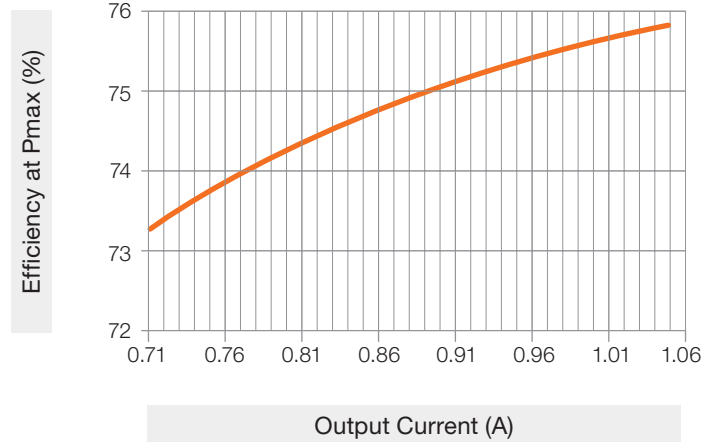

Typical THD vs. Output Power

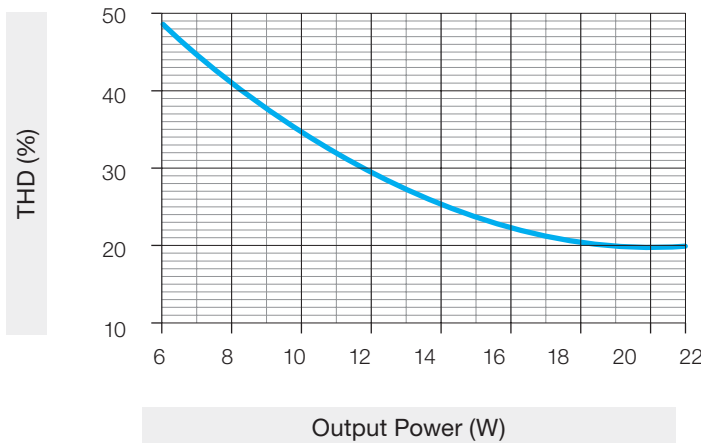

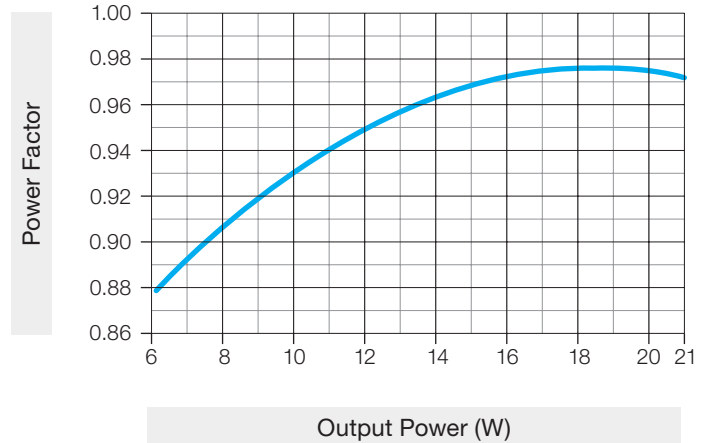

Typical Power Factor vs. Output Power



 SPECIFICATION SUBMITTAL

Job Name:	Model Numbers:
Job Number:	

## “J” Output Range, Current Driver Models

Driver Type	Output Dimming Method	Output Voltage	Output Current	Output Power	Standards Recognition	UL® Listed, Remote-Mountable Available	Standards Recognition for UL® Listed, Remote-Mountable
Constant-Current Driver (Class 2)	Pulse Width Modulation (PWM)	15–38 V PWM	0.71–1.05 A	11–40 W		Yes	
	Constant-Current Reduction (CCR)	15–38 V==					

When using QwikFig technology, these models can be built from the following bulk units in 10 mA increments:


K-case - LTEA4U1UKx-2SBLK\*; M-case - LTEA4U1UMN-2BBLK

\* x = studded (S) or non-studded (N)

### Typical Performance Specifications:


Parameter	Value	Test Conditions
Input Current	410 mA	t <sub>a</sub> = 25 °C, 1.05 A 40 W load, Maximum Light Output, K case 120 V~ without a dimmer
Power Factor	0.99	
THD	7%	
Driver Efficiency	81%	

### Load Compatibility

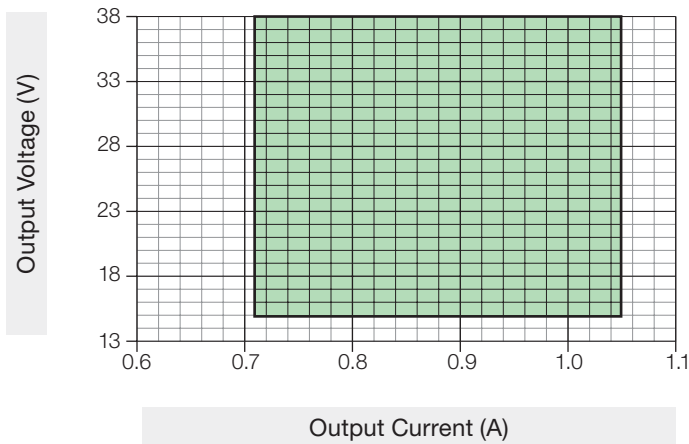


Key:  Green area shows California Title 24 and Energy Star 2.0 Compliance


### Typical Efficiency vs. Output Current

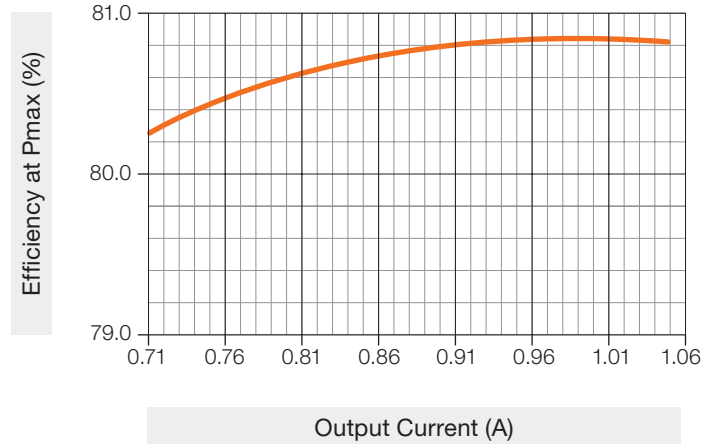

### Typical THD vs. Output Power

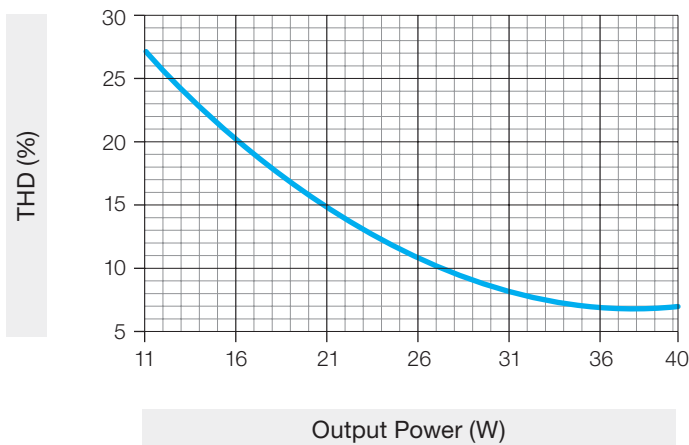


### Typical Power Factor vs. Output Power

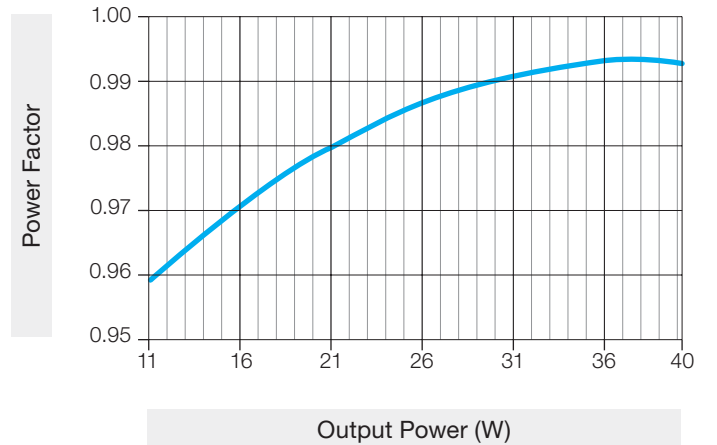

## SPECIFICATION SUBMITTAL

Job Name:	Model Numbers:
Job Number:	

## UL® Listed, Remote-Mountable: Case Dimensions

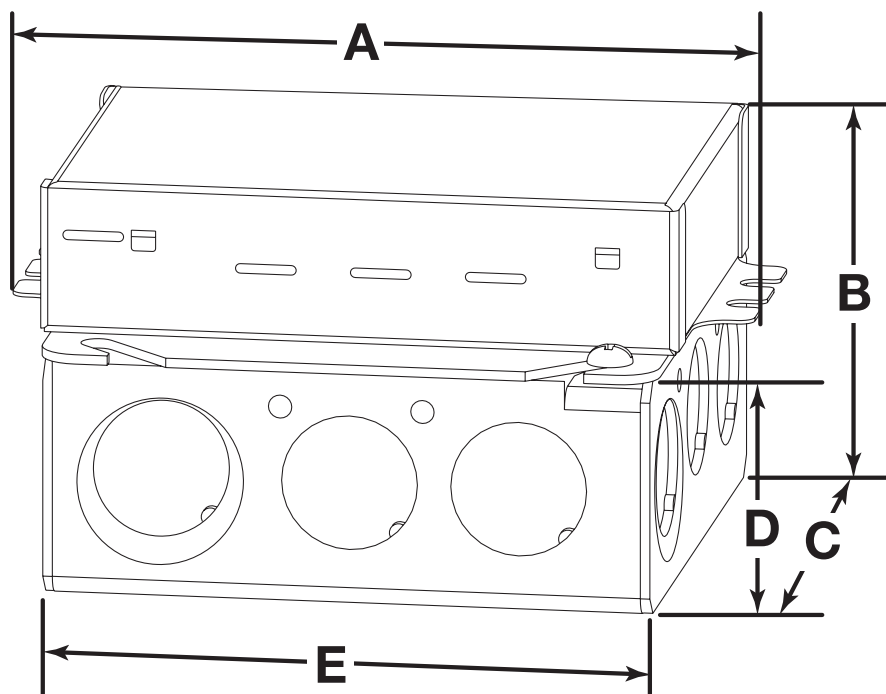

A	4.89 in (124 mm)
B	2.62 in (66 mm)
C	4.00 in (102 mm)
D	1.62 in (41 mm)
E	4.00 in (102 mm)

KL case includes a 4 in (102 mm) square junction box which complies with NEMA OS 1-2008 Figure 112.

### Knockouts

- Sides
  - 8 locations: 0.5 in (13 mm)
  - 4 locations: 0.5/0.75 in (13/19 mm)
- Bottom
  - 2 locations: 0.5 in (13 mm)
  - 2 locations: 0.5/0.75 in (13/19 mm)


### Driver Wiring and Mounting

- Driver is grounded by the green ground wire connection on the enclosure or by the ground lug terminal in the junction box
- Driver and junction box must be grounded in accordance with local and national electrical codes
- All wire connections must be made in the junction box to maintain UL® listing
- 4 in (102 mm) square junction box is 1.5 in (38 mm) deep with 22.0 in<sup>3</sup> (360.5 cm<sup>3</sup>) capacity and complies with NEMA OS 1-2008 Figure 112
- Driver is pre-wired with 6 in (152 mm), 18 AWG (0.75 mm<sup>2</sup>) solid copper leads in all terminal blocks

### LUTRON SPECIFICATION SUBMITTAL

Job Name:	Model Numbers:
Job Number:	

## UL® Marking and Compatibility

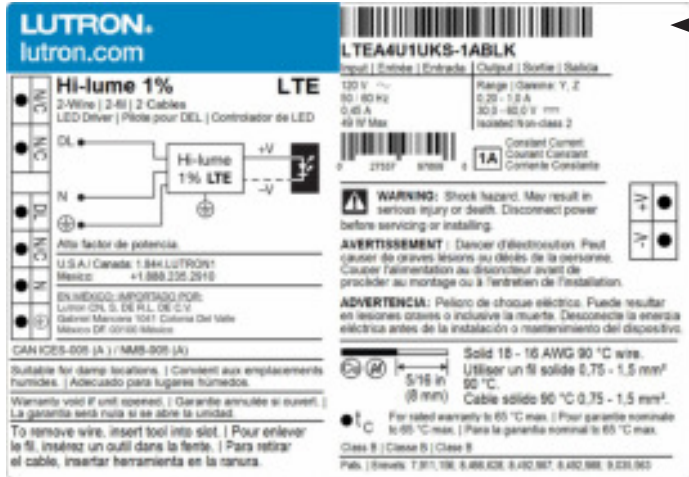

← Location of the standards mark on the driver.



Drivers marked as UL® recognized are ONLY compatible with those controls marked with an asterisk (\*) on the following pages.



Drivers marked as UL® Listed Class P are compatible with all controls referenced on the following pages.



Drivers marked as UL® 8750 Listed and manufactured before November 20, 2017, are ONLY compatible with those controls marked with an asterisk (\*) on the following pages. Date code on the driver is in international date format, DD/MM/YYYY.


**Note:** If the fixture or driver is not accessible and the standards marking is unknown, use controls marked with an asterisk (\*).

## Wiring

### Controls Requiring Neutral

**Note:** Colors shown correspond to terminals on driver.

### Wiring Diagram

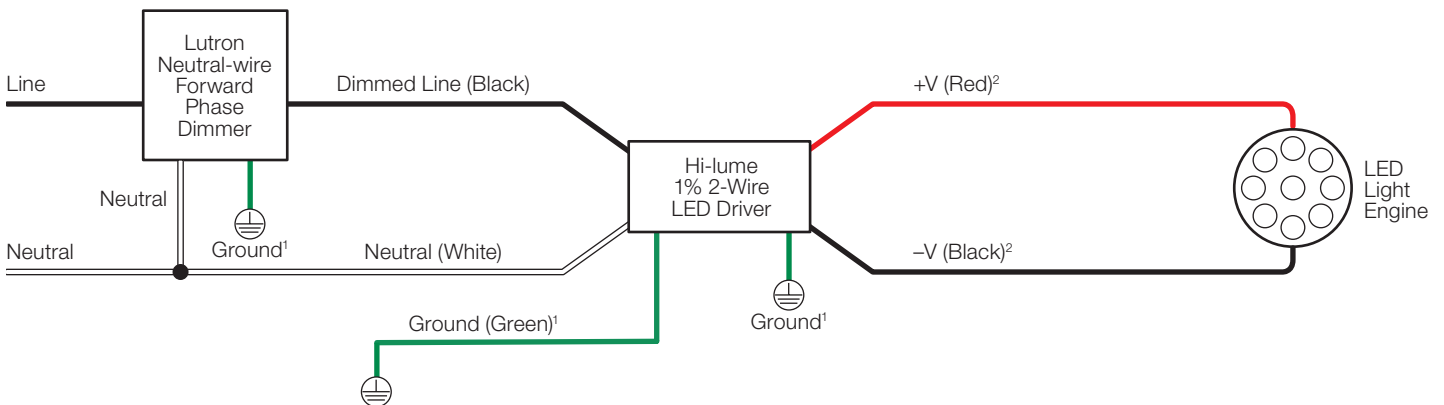

<sup>1</sup>Ground wire connection available on K case models only. Fixture and driver case must be grounded in accordance with local and national electrical codes.

<sup>2</sup>For maximum driver-to-LED light engine wire length, see charts in **Driver Leads** section at the end of the document.

## LUTRON SPECIFICATION SUBMITTAL

Job Name:	Model Numbers:
Job Number:	





## Wiring (continued)

## Controls Requiring Neutral (continued)

## Compatible Controls: Lutron Neutral-wire Dimmers

Guaranteed performance specifications with the controls listed in the chart below.

For assistance selecting controls, contact our LED Center of Excellence at 1.877.DIM.LED8 or LEDs@lutron.com



Product	Part Number	Low-End Setting/ Load-Type Setting <sup>1</sup>	Drivers per Control		
			A: Not Ganged	B: End of Gang	C: Middle of Gang
RadioRA 2 adaptive dimmer*	RRD-6NA-	Hi-lume 1% 2-Wire LTE LED <sup>2</sup>	1–10, 400 W max	1–10, 400 W max	1–10, 400 W max
RA2 Select/RadioRA 2 600 W dimmer	RRD-6ND	Hi-lume 1% 2-Wire LTE LED <sup>2</sup>	1–8, 350 W max	1–8, 350 W max	1–8, 350 W max
RadioRA 2 1000 W dimmer*	RRD-10ND-	Set Device type to “INC/MLV Neutral Dimmer”; Set High-End Trim to 99%; Set Low-End Trim to 35%	1–13	1–13	1–13
RadioRA 2 Architectural RF GRAFIK T phase selectable dimmer <sup>3</sup>	RRT-G5NEW- <sup>3</sup>	Trim low-end per APM App Note (Lutron P/N 048534)	1–10, 400 W max	1–10, 400 W max	1–10, 400 W max
RadioRA 2 Architectural RF GRAFIK T dimmer	RRT-G25LW-	Trim low-end per APM App Note (Lutron P/N 048534)	1–10, 400 W max	1–10, 400 W max	1–10, 400 W max
RadioRA 2 C•L hybrid seeTouch keypad	RRD-HN	Hi-lume 1% 2-Wire LTE LED	1–10, 200 W max	1–10, 200 W max	1–10, 200 W max
RadioRA 2 GRAFIK T C•L hybrid keypad	RRT-GH	Hi-lume 1% 2-Wire LTE LED	1–10, 400 W max	1–10, 400 W max	1–10, 400 W max
HomeWorks QS adaptive dimmer*	HQRD-6NA-	Hi-lume 1% 2-Wire LTE LED <sup>2</sup>	1–10, 400 W max	1–10, 400 W max	1–10, 400 W max
HomeWorks QS 600 W dimmer*	HQRD-6ND-	Hi-lume 1% 2-Wire LTE LED <sup>2</sup>	1–8, 350 W max	1–8, 350 W max	1–8, 350 W max
HomeWorks QS 1000 W dimmer*	HQRD-10ND-	Hi-lume 1% 2-Wire LTE LED <sup>2</sup>	1–13	1–13	1–13
Maestro Wireless 600 W dimmer*	MRF2-6ND-120-	Trim low-end per APM App Note (Lutron P/N 048370)	1–8, 350 W max	1–8, 350 W max	1–8, 350 W max
Vive Maestro Wireless 600 W dimmer*	MRF2S-6ND-120-	Trim low-end per APM App Note (Lutron P/N 048370)	1–8, 350 W max	1–8, 350 W max	1–8, 350 W max
HomeWorks QS GRAFIK T hybrid keypad	HQRT-GH	Hi-lume 1% 2-Wire LTE LED	1–10, 400 W max	1–10, 400 W max	1–10, 400 W max
HomeWorks QS Architectural GRAFIK T dimmer	HQRT-G25LW-	Hi-lume 1% 2-Wire LTE LED	1–10, 400 W max	1–10, 400 W max	1–10, 400 W max
HomeWorks QS Architectural GRAFIK T phase selectable dimmer <sup>3</sup>	HQRT-G5NEW- <sup>3</sup>	Hi-lume 1% 2-Wire LTE LED	1–10, 400 W max	1–10, 400 W max	1–10, 400 W max
HomeWorks QS designer C•L hybrid seeTouch keypad	HQRD-HN	Hi-lume 1% 2-Wire LTE LED	1–10, 200 W max	1–10, 200 W max	1–10, 200 W max
GRAFIK T C•L 250 W dimmer*	GT-250M-, GTJ-250M-	Set low-end trim per dimmer installation instructions	1–10, 400 W max	1–10, 400 W max	1–10, 400 W max
Caséta Wireless Pro 1000 W dimmer*	PD-10NXD-	Trim low-end per instructions at <a href="http://www.casetawireless.com/lowend">www.casetawireless.com/lowend</a>	1–13	1–13	1–13
Caséta Wireless phase selectable dimmer <sup>3</sup>	PD-5NE- <sup>3</sup>	Trim low-end per instructions at <a href="http://www.casetawireless.com/lowend">www.casetawireless.com/lowend</a>	1–20, 400 W max	1–20, 400 W max	1–20, 400 W max
Maestro PRO phase selectable dimmer	MA-PRO <sup>3</sup>	Trim low-end per APM App Note (Lutron P/N 048703)	1–20, 400 W max	1–20, 400 W max	1–20, 400 W max

**Note: All wattages are in terms of input wattage to the LED driver.**

\* See note on page 35 for control compatibility.

<sup>1</sup> Setting the low-end trim and load type is necessary to ensure optimal performance and 1% dimming capability.

**Note:** For information about Legacy Product use in existing control application, contact LEDs@lutron.com

<sup>2</sup> Also listed as “LED Lutron A-Series 2-Wire” or “Hi-lume A-Series LTE LED Driver 2-Wire” in previous software releases.


<sup>3</sup> Not compatible in default mode (reverse-phase). Dimmer must be changed to forward-phase.

 SPECIFICATION SUBMITTAL

<b>Job Name:</b>	<b>Model Numbers:</b>
<b>Job Number:</b>	

**Wiring** (continued)**Controls Requiring Neutral** (continued)

**Note:** Colors shown correspond to terminals on driver.

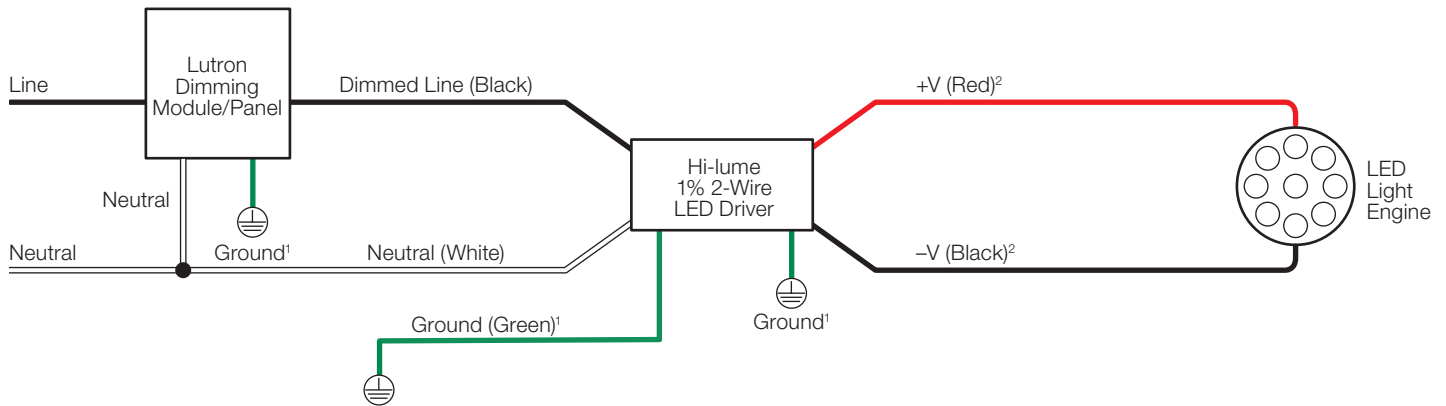**Wiring Diagram**

<sup>1</sup> Ground wire connection available on K case models only. Fixture and driver case must be grounded in accordance with local and national electrical codes.

<sup>2</sup> For maximum driver-to-LED light engine wire length, see charts in **Driver Leads** section at the end of the document.

**Compatible Controls: Lutron Dimming Modules/Panels**

Guaranteed performance specifications with the controls listed in the chart below.

For assistance selecting controls, contact our LED Center of Excellence at 1.877.DIM.LED8 or LEDs@lutron.com

Product	Part Number	Drivers per Control	Low-End Setting/Load-Type Setting <sup>1</sup>
myRoom DIN power module*	MQSE-4A1-D	1–6 (per output); 1 A maximum driver input current	Hi-lume 1% 2-Wire LTE LED <sup>2</sup>
HomeWorks QS DIN power module*	LQSE-4A1-D	1–6 (per output); 1 A maximum driver input current	Hi-lume 1% 2-Wire LTE LED <sup>2</sup>
HomeWorks QS Phase Adaptive DIN power module <sup>3</sup>	LQSE-4A-120-D <sup>3</sup>	1–6 (per output); 2 A maximum driver input current	Hi-lume 1% 2-Wire LTE LED <sup>2</sup>
HomeWorks QS wallbox power module*	HQRJ-WPM-6D-120	1–10 (per output); 26 total per module	Hi-lume 1% 2-Wire LTE LED <sup>2</sup>
HomeWorks wallbox power module*	HWI-WPM-6D-120	1–10 (per output); 26 total per module	Set load type to “GRX-FDBI” or “GRX-TVI”
GRAFIK Eye QS control unit*	QSGR-, QSGRJ-	1–10 (per output); 26 total per unit	Set load type to “Fluorescent Module”
GRAFIK Eye 3000 control unit*	GRX-3100-, GRX-3500-	1–10 (per output); 26 total per module	Set load type to “GRX-FDBI” or “GRX-TVI”
RPM-4U module (LCP, HomeWorks QS, GRAFIK Systems, Quantum)*	HW-RPM-4U-120, LP-RPM-4U-120	1–26 (per output); 26 total per module	Hi-lume 1% 2-Wire LTE LED <sup>2</sup> Set load type to “2-1”
RPM-4A module (LCP, HomeWorks QS, GRAFIK Systems, Quantum)*	HW-RPM-4A-120, LP-RPM-4A-120	1–13 (per output); 26 total per module	Hi-lume 1% 2-Wire LTE LED <sup>2</sup> Set load type to “2-1”
GP dimming panels*	Various	1–26	Set load type to “2-1”

\* See note on page 35 for control compatibility.

<sup>1</sup> Setting the low-end trim and load type is necessary to ensure optimal performance and 1% dimming capability.

<sup>2</sup> Also listed as “LED Lutron A-Series 2-Wire” or “Hi-lume A-Series LTE LED Driver 2-Wire” in previous software releases.

<sup>3</sup> Not compatible in default mode (reverse-phase). Additional configuration is necessary in forward-phase.

**LUTRON SPECIFICATION SUBMITTAL**


<b>Job Name:</b>	<b>Model Numbers:</b>
<b>Job Number:</b>	

Wiring (continued)

Controls Not Requiring Neutral

Note: Colors shown correspond to terminals on driver.

Wiring Diagram

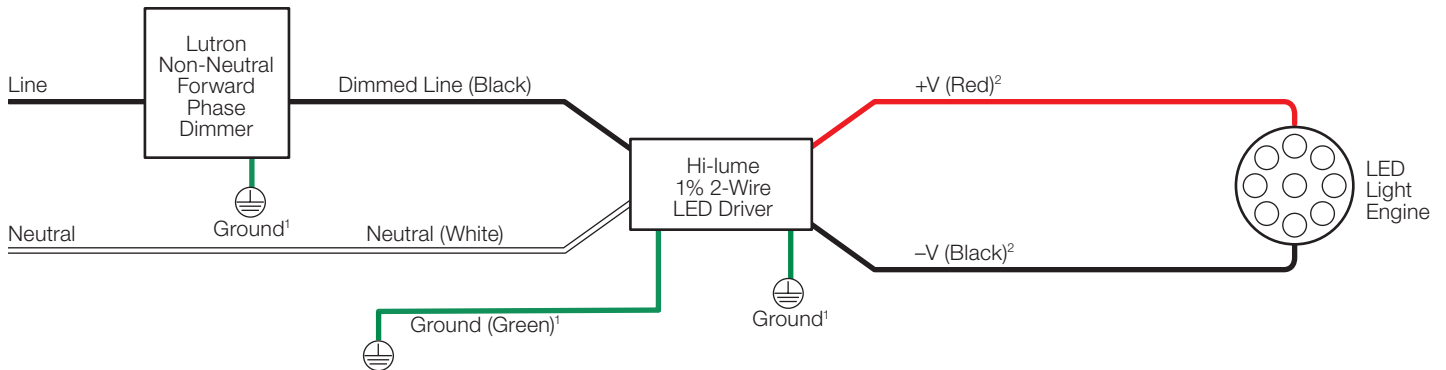


<sup>1</sup> Ground wire connection available on K case models only. Fixture and driver case must be grounded in accordance with local and national electrical codes.

<sup>2</sup> For maximum driver-to-LED light engine wire length, see charts in **Driver Leads** section at the end of the document.

Compatible Controls: Lutron Non-Neutral Dimmers

Guaranteed performance specifications with the controls listed in the chart below.

For assistance selecting controls, contact our LED Center of Excellence at 1.877.DIM.LED8 or LEDs@lutron.com

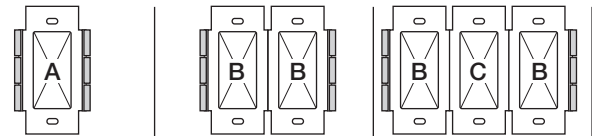

Product	Part Number	Low-End Setting/Load-Type Setting <sup>1</sup>	Drivers per Control		
			A: Not Ganged	B: End of Gang	C: Middle of Gang
Ariadni C•L 250 W dimmer*	AYCL-253P-	Set low-end trim dial to 1 o'clock. Adjust slightly if needed. See dimmer installation instructions on how to adjust low-end trim.	1-8, 350 W max	1-8, 350 W max	1-8, 350 W max
Ariadni C•L 150 W dimmer	TGCL-153P-, AYCL-153P-	Set low-end trim dial to 1 o'clock. Adjust slightly if needed. See dimmer installation instructions on how to adjust low-end trim.	1-6, 250 W max	1-6, 250 W max	1-6, 250 W max
Diva C•L 250 W dimmer*	DVCL-253P- DVSCCL-253P-	Set low-end trim dial to 10 o'clock. Adjust slightly if needed. See dimmer installation instructions on how to adjust low-end trim.	1-8, 350 W max	1-8, 350 W max	1-8, 350 W max
Diva C•L 150 W dimmer	DVCL-153P-, DVSCCL-153P-	Set low-end trim dial to 10 o'clock. Adjust slightly if needed. See dimmer installation instructions on how to adjust low-end trim.	1-6, 250 W max	1-6, 250 W max	1-6, 250 W max
Nova T★ C•L 250 W dimmer*	NTCL-250-	Set low-end trim dial to 10 o'clock. Adjust slightly if needed. See dimmer installation instructions on how to adjust low-end trim.	1-10, 400 W max	1-10, 400 W max	1-10, 400 W max
Lumea C•L 150 W dimmer	LECL-153P-	Set low-end trim dial to 10 o'clock. Adjust slightly if needed. See dimmer installation instructions on how to adjust low-end trim.	1-6, 250 W max	1-6, 250 W max	1-6, 250 W max
Skylark C•L 150 W dimmer	SCL-153P-	Set low-end trim dial to 10 o'clock. Adjust slightly if needed. See dimmer installation instructions on how to adjust low-end trim.	1-6, 250 W max	1-6, 250 W max	1-6, 250 W max
Contour C•L 150 W dimmer	CTCL-153P-	Set low-end trim dial to 10 o'clock. Adjust slightly if needed. See dimmer installation instructions on how to adjust low-end trim.	1-6, 250 W max	1-6, 250 W max	1-6, 250 W max

Note: All wattages are in terms of input wattage to the LED driver.

\* See note on page 35 for control compatibility.

<sup>1</sup> Setting the low-end trim and load type is necessary to ensure optimal performance and 1% dimming capability.

Note: For information about Legacy Product use in existing control application, contact LEDs@lutron.com

LUTRON SPECIFICATION SUBMITTAL

Job Name:	Model Numbers:
Job Number:	


Wiring (continued)

Controls Not Requiring Neutral (continued)

Compatible Controls: Lutron Non-Neutral Dimmers

Guaranteed performance specifications with the controls listed in the chart below.

For assistance selecting controls, contact our LED Center of Excellence at 1.877.DIM.LED8 or LEDs@lutron.com

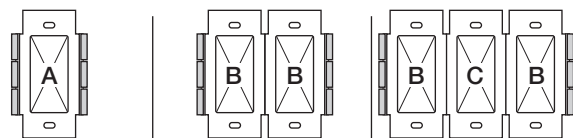

Product	Part Number	Low-End Setting/Load-Type Setting <sup>1</sup>	Drivers per Control		
			A: Not Ganged	B: End of Gang	C: Middle of Gang
Maestro C•L 150 W dimmer	MACL-153M-	Trim low-end per APM App Note (Lutron P/N 048370)	1–6, 250 W max	1–6, 250 W max	1–6, 250 W max
Maestro C•L 150 W sensor	MSCL-OP153M-, MSCL-VP153M-	Trim low-end per APM App Note (Lutron P/N 048370)	1–6, 250 W max	1–6, 250 W max	1–6, 250 W max
Vive Maestro C•L 150 W dimmer	MRF2S-6CL-	Trim low-end per APM App Note (Lutron P/N 048370)	1–6, 250 W max	1–6, 250 W max	1–6, 250 W max
GRAFIK T C•L 150 W dimmer	GTJ-150-	Set low-end trim per dimmer installation instructions	1–6, 250 W max	1–6, 250 W max	1–6, 250 W max
Maestro Wireless C•L 150 W dimmer	MRF2-6CL-	Trim low-end per APM App Note (Lutron P/N 048370)	1–6, 250 W max	1–6, 250 W max	1–6, 250 W max
RadioRA 2 C•L 150 W dimmer	RRD-6CL-	Set low-end trim per dimmer installation instructions	1–6, 250 W max	1–6, 250 W max	1–6, 250 W max
HomeWorks QS Designer C•L 150 W dimmer	HQRD-6CL-	Hi-lume 1% 2-Wire LTE LED	1–6, 250 W max	1–6, 250 W max	1–6, 250 W max
Caséta Wireless C•L Dimmer	PD-6WCL-	Trim low-end per instructions at <a href="http://www.casetawireless.com/lowend">www.casetawireless.com/lowend</a>	1–6, 250 W max	1–6, 250 W max	1–6, 250 W max
RadioRA 2 Architectural RF GRAFIK T dimmer <sup>2</sup>	RRT-G25LW-	Trim low-end per APM App Note (Lutron P/N 048534)	1–10, 400 W max	1–10, 400 W max	1–10, 400 W max
HomeWorks QS Architectural GRAFIK T dimmer <sup>2</sup>	HQRT-G25LW-	Hi-lume 1% 2-Wire LTE LED	1–10, 400 W max	1–10, 400 W max	1–10, 400 W max
GRAFIK T C•L 250 W dimmer <sup>* 2</sup>	GT-250M-, GTJ-250M-	Set low-end trim per dimmer installation instructions	1–10, 400 W max	1–10, 400 W max	1–10, 400 W max

**Note: All wattages are in terms of input wattage to the LED driver.**

\* See note on page 35 for control compatibility.

<sup>1</sup> Setting the low-end trim and load type is necessary to ensure optimal performance and 1% dimming capability.


**Note:** For information about Legacy Product use in existing control application, contact LEDs@lutron.com

<sup>2</sup> Minimum number of drivers for GRAFIK T will vary based on the number of companion dimmers (model number GT-AD) connected. Refer to the GRAFIK T Spec Submittal, Lutron P/N 369826, at [www.lutron.com](http://www.lutron.com) This only applies when neutral is not connected.

**LUTRON** SPECIFICATION SUBMITTAL

<b>Job Name:</b>	<b>Model Numbers:</b>
<b>Job Number:</b>	

### Terminal Wiring Gauges

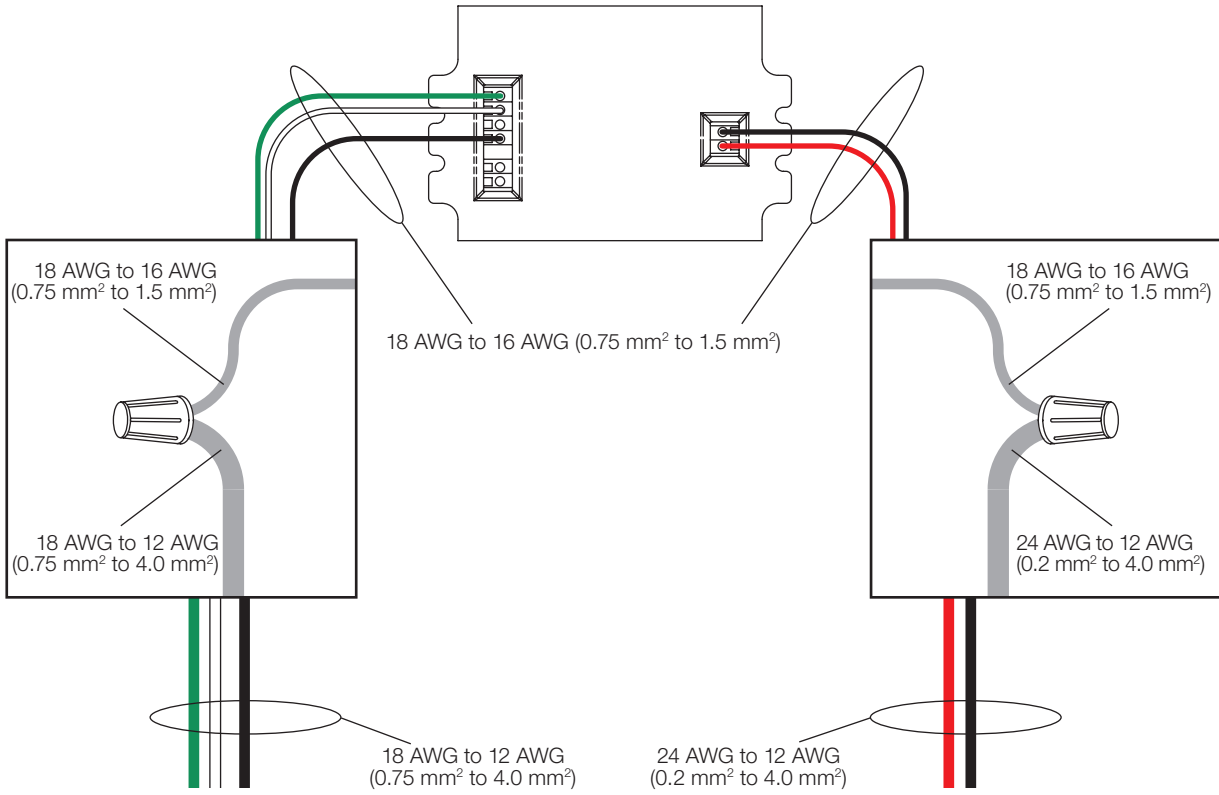

**Note:** Colors shown correspond to terminal blocks on driver.

### SPECIFICATION SUBMITTAL

Job Name:	Model Numbers:
Job Number:	

## Electricians and Contractors

### Driver Leads

Maximum driver-to-LED light engine wire length for

#### Constant-Current Drivers:

Wire Gauge*	Maximum Lead Length		
	200 mA to 700 mA	710 mA to 1.50 A	1.51 A to 2.10 A
24 AWG (0.2 mm <sup>2</sup> )	8 ft (2.5 m)	4 ft (1.2 m)	2.75 ft (0.8 m)
22 AWG (0.34 mm <sup>2</sup> )	13 ft (4 m)	6 ft (1.8 m)	4.5 ft (1.5 m)
20 AWG (0.5 mm <sup>2</sup> )	20 ft (6 m)	10 ft (3 m)	7 ft (2 m)
18 AWG (0.75 mm <sup>2</sup> )	30 ft (9 m)	15 ft (4.5 m)	10 ft (3 m)
16 AWG (1.5 mm <sup>2</sup> )	35 ft (10.5 m)	25 ft (7.5 m)	15 ft (4.5 m)
14 AWG (2.5 mm <sup>2</sup> )	50 ft (15 m)	40 ft (12 m)	25 ft (7.5 m)
12 AWG (4.0 mm <sup>2</sup> )	100 ft (30 m)	60 ft (18 m)	40 ft (12 m)

Maximum driver-to-LED light engine wire length for

#### Constant-Voltage Drivers:

Wire Gauge*	Maximum Lead Length		
	10 V to 20 V	20.5 V to 40 V	40.5 V to 60 V
24 AWG (0.2 mm <sup>2</sup> )	2.5 ft (0.8 m)	4 ft (1.2 m)	8 ft (2.5 m)
22 AWG (0.34 mm <sup>2</sup> )	4 ft (1.2 m)	6 ft (1.8 m)	12 ft (3.7 m)
20 AWG (0.5 mm <sup>2</sup> )	6 ft (1.8 m)	10 ft (3 m)	20 ft (6 m)
18 AWG (0.75 mm <sup>2</sup> )	10 ft (3 m)	15 ft (4.5 m)	30 ft (9 m)
16 AWG (1.5 mm <sup>2</sup> )	15 ft (4.5 m)	25 ft (7.5 m)	50 ft (15 m)
14 AWG (2.5 mm <sup>2</sup> )	25 ft (7.5 m)	40 ft (12 m)	75 ft (22.5 m)
12 AWG (4.0 mm <sup>2</sup> )	40 ft (12 m)	60 ft (18 m)	100 ft (30 m)

\* Terminal blocks on the drivers accept only solid 18 AWG or 16 AWG (0.75 mm<sup>2</sup> or 1.5 mm<sup>2</sup>) wire. To use wire gauges larger or smaller than this terminal blocks' rated gauge of 18 AWG or 16 AWG (0.75 mm<sup>2</sup> or 1.5 mm<sup>2</sup>) refer to the **Terminal Wiring Gauges** diagram on the previous page. Connect up to 3 ft (0.9 m) of 18 AWG or 16 AWG (0.75 mm<sup>2</sup> or 1.5 mm<sup>2</sup>) wire to the LED driver terminal blocks, then connect 14 AWG to 12 AWG (2.5 to 4.0 mm<sup>2</sup>) or 24 AWG to 20 AWG (0.20 mm<sup>2</sup> to 0.50 mm<sup>2</sup>) up to the length allowed in the above table.

### Wiring and Grounding

Driver and lighting fixture must be grounded.

Drivers must be installed per national and local electrical codes.

### LED Load Replacement

For Class 2 rated drivers, the LED load can be changed while the driver is installed and powered.

### Maximum Driver Operating Temperature

Driver case temperature ( $t_c$ ) must not exceed UL conditions of acceptability in end product.

For 50,000 hour lifetime, driver case temperature ( $t_c$ ) must not exceed 65 °C.

## LUTRON SPECIFICATION SUBMITTAL

Job Name:	Model Numbers:
Job Number:	

## Facilities Managers

### SERVICE

#### Warranty

For warranty information, please visit [www.lutron.com/driverwarranty](http://www.lutron.com/driverwarranty)

#### Replacement Parts

When ordering Lutron replacement parts please provide the full model number. Consult Lutron Customer Assistance at 1.844.LUTRON1 if you have any questions.

#### Further Information


For further information, please visit us at [www.lutron.com/hilume1led](http://www.lutron.com/hilume1led) or contact our LED Control Center of Excellence at 1.877.DIM.LED8 or [LEDs@lutron.com](mailto:LEDs@lutron.com)

### FOR CASE TYPE KL, REMOTE-MOUNTABLE MODELS:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Lutron,  Lutron, Hi-lume, C•L, Caséta, GRAFIK Eye, PowPak, Quantum, Lumea, Nova T★, Nova, Skylark, seeTouch, Diva, Ariadni, Maestro, Maestro Wireless, RadioRA, and HomeWorks are trademarks of Lutron Electronics Co., Inc., registered in the U.S. and other countries. Energi Savr Node, QwikFig, GRAFIK, GRAFIK Systems, GRAFIK T, myRoom, Vive, and RadioRA 2 are trademarks of Lutron Electronics Co., Inc.

UL and the UL logo are trademarks of UL LLC.

### LUTRON SPECIFICATION SUBMITTAL

<b>Job Name:</b>	<b>Model Numbers:</b>
<b>Job Number:</b>	