



20 Linear Recessed





inter•lux


Recessed Plaster Trim (RPT)

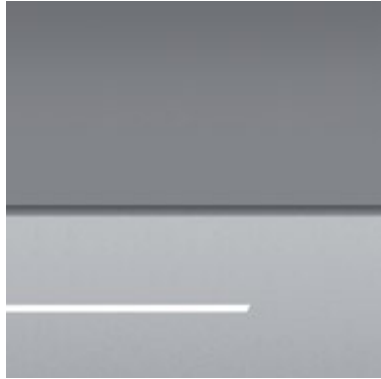

Recessed Grid Trim (RGT)

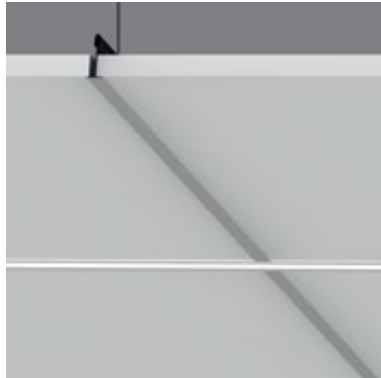


Mounting options

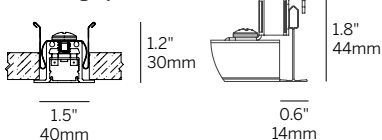

Recessed bezel trim (RBT)

Bezel flush to grid (RGT9/RGT15)

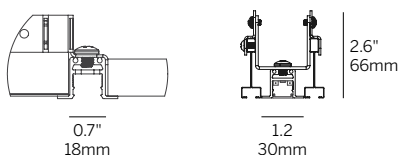

Grid on bezel (RGT9/RGT15)

Recessed grid trim slot (RGTS)

Ordering Information

Model	Fixation	Pattern	Length	Power ²	CRI/CCT ³	Driver ³	Lens	Finish	Cable	Options
WG-20LDL	RPT RBT RGT9 RGT15 RGTS	S P ¹ PPI ¹ PPO ¹ PZ ¹	A A x B A x B x C A x B x A x B	L M H	927 930 935 940 WD RGBW	X S D010 DPH L3DAE L3DOE EL96 DMX	OD (std) MPL BDO ⁵ BDC ⁵	W (std) B S F	C4 (std) C10 C20 C30	CP EM WL ⁶

Luminaire

- Recessed fixture with very shallow depth for continuous mounting to any desired length (1/4" increments), as well as standard grid multiples.
- Multiple lens options for diffuse, high efficiency and luminous effect.
- Remote driver options (required). Field replaceable LED boards.
- Lengths and angles factory-cut to exact field dimensions.
- 90+ CRI, 3 Steps MacAdam delivering excellent color rendering.
- L70 (TM21 Projected 85C) Static White 60,000 hours, RGBW 50,000 hours, WD 36,000 hours.
- ETL and ETL-C for dry and damp location.

Fixation

- RPT = Recessed plaster trim
- RBT = Recessed bezel trim
- RGT9 = Recessed grid trim 9/16"
- RGT15 = Recessed grid trim 15/16"
- RGTS = Recessed grid trim slot

Pattern

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane¹
- PPI = Wall to ceiling/wall to wall, 90° inside corner¹
- PPO = Wall to ceiling/wall to wall, 90° outside corner¹
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory¹

Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25") For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)

Power²

- L = 3W/ft low power (WD 2.7 W/ft) (24V)
- M = 6W/ft mid power (WD 5.5 W/ft) (24V) (RGBW - 7.6 W/ft)
- H = 10W/ft high power (WD 8 W/ft) (24V)

CRI/CCT (90+ CRI)³

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- WD = Warm Dimming 1800 -3000K
- RGBW = 3000K White (M power only)

Cutout Dimensions

RPT = 1.4" width / length + 1/4" / RBT = 1" width / length + 1/4"

Driver (remote)³

- X = No driver, ordered separately
- S = Standard, non-dim driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- DPH = Phase Dimming, 1% dimming, 120V only
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- EL96 = Osram / EldoLED, 24V, 0.1% 0-10V Dimming
- DMX = Osram / EldoLED, 24V, 0.1% DMX Dimming

Lens

- OD = Satin opal diffuser (standard)
- MPL = Micro-prismatic lens
- BDO = Block diffuser opal⁵
- BDC = Block diffuser clear⁵

Finish

- W = White, 15% gloss, RAL 9010 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finished trim, specify RAL

Cable

- C4 = 4' tray cable (plenum rated) (standard)
- C10 = 10' tray cable (plenum rated)
- C20 = 20' tray cable (plenum rated)
- C30 = 30' tray cable (plenum rated)

Options

- CP = Chicago Plenum (available for RPT)
- EM = Emergency LED driver (remote only)
- WL = Wet Location Under Canopy / Cover⁶

- See pattern spec sheet.
- Wattage shown is for LED boards only, system wattage varies depending on driver selected.
- See photometric data sheet for delivered lumens.
- Remote power supply required. See power supply page for details.
- Butt seam (lens) when in continuous run, straight runs only. BDO/BDC offered for RBT / RGT only.
- Wet Location option available for OD / MPL lenses and recessed / surface ceiling applications only.

Lenses/Accessories



Opal Diffuser (OD)
Micro-prismatic Lens (MPL)



Block Diffuser (BD)

