



20 Linear Surface



Ordering Information										
WG-20LDL-SM										
Model	Fixation	Pattern	Length	Power ²	CRI/ CCT ³	Driver ⁴	Lens	Finish ⁷	Cable	Options
WG-20LDL-SM	SC MM GT9 GT9T GT15 A90 A180	S P ¹ PPI ¹ PPO ¹ PZ ¹	A A x B A x B x C A x B x A x B	L M H	927 930 935 940 WD RGBW	X S D010 L3DAE L3D0E EL96 DMX	OD (std) SD MPL NL16 LL45B ⁵ LL45W ⁵ LL45S ⁵ BDO ⁶ BDC ⁶ ROD ⁶	W (std) B S F	C4 (std) C10 C20 C30	EM WL ⁸

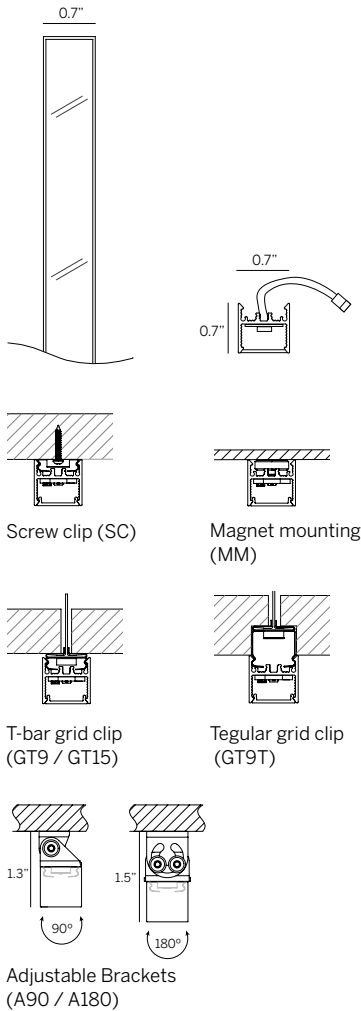

Lenses/Accessories

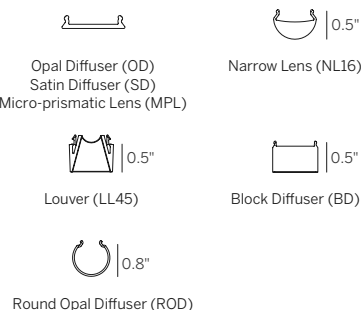

Luminaire

- Surface mounted fixture with very shallow depth for continuous mounting to any length (1/4" increments), as well as standard grid multiples.
- Multiple lenses and louvers for general, accent, decorative and grazing applications
- Remote driver options (required). Field replaceable LED boards.
- Lengths and angles factory-cut to exact field dimensions.
- 90+ CRI, 3 Steps MacAdam.
- L70 (TM21 Projected 85C) Static White 60,000 hours, RGBW 50,000 hours, WD 36,000 hours.
- ETL and ETL-C for dry and damp location.

Fixation

- SC = Screw clip
- MM = Magnet mounting
- GT9 = 9/16" T-bar grid clip
- GT9T = 9/16" Tegular grid clip
- GT15 = 15/16" T-bar grid clip
- A90 = Adjustable 90° bracket
- A180 = Adjustable 180° bracket

Pattern

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane¹
- PPI = Pattern, Plane to Plane, Inside. 2-3-4 sided pattern with inside corners¹
- PPO = Pattern, Plane to Plane, Outside. 2-3-4 sided pattern with outside corners¹
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory¹

Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25") For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)

Power²

- L = 3W/ft low power (WD 2.7 W/ft) (24V)
- M = 6W/ft mid power (WD 5.5 W/ft) (24V) (RGBW - 7.6 W/ft)
- H = 10W/ft high power (WD 8 W/ft) (24V)

CRI/CCT (90+ CRI)³

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- WD = Warm Dimming 1800 - 3000K
- RGBW = 3000K White (M power only)

Driver (remote)⁴

- X = No driver, ordered separately
- S = Standard, non-dim driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- EL96 = Osram / EldoLED, 24V, 0.1% 0-10V Dimming
- DMX = Osram / EldoLED, 24V, 0.1% DMX Dimming

Lens

- OD = Satin opal diffuser (standard)
- SD = Satin clear diffuser
- MPL = Micro-prismatic lens
- NL16 = Linear narrow lens, 16°
- LL45B = Linear louver black⁵
- LL45W = Linear louver white⁵
- LL45S = Linear louver satin⁵
- BDO = Block diffuser opal⁶
- BDC = Block diffuser clear⁶
- ROD = Round opal diffuser⁶

Finish⁷

- W = White, 15% gloss, RAL 9010 / Tiger Drylac 009/10120 (standard)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 044/90053
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 049/90500
- F = Custom finished trim, specify RAL

Cable

- C4 = 4' tray cable (plenum rated) (standard)
- C10 = 10' tray cable (plenum rated)
- C20 = 20' tray cable (plenum rated)
- C30 = 30' tray cable (plenum rated)

Options

- EM = Emergency LED driver (remote only)
- WL = Wet Location Under Canopy / Cover⁸

- 1 See pattern spec sheet.
- 2 Wattage shown is for LED boards only, system wattage varies depending on driver selected.
- 3 See photometric data sheet for delivered lumens.
- 4 Remote power supply required. See power supply page for details.
- 5 Louver available in 4.75" increments, straight runs only.
- 6 Butt seam (lens) when in continuous run, straight runs only.
- 7 See Tiger Drylac color chart: inter-lux.com/tiger
- 8 Wet Location option available for OD / SD / MPL lenses and recessed / surface ceiling applications only.