


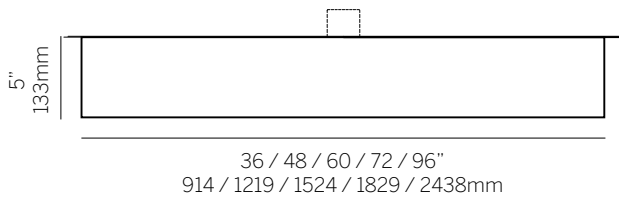


# Clearline Ceiling

Clearline Ceiling is a clean, linear form for general illumination as well as accent lighting.

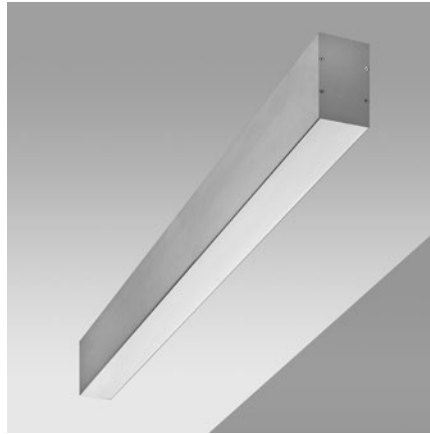

## Notes

<sup>1</sup>Nominal lumens

<sup>2</sup>82 CRI standard / 90 CRI available

<sup>3</sup>12" distance between accent lights standard (contact factory for other accent light spacings)

For up to date technical information, refer to [inter-lux.com/alm](http://inter-lux.com/alm)

# inter•lux

## Model CL2

CL2

### Type

C Ceiling

C

### Size

36 36"  
48 48"  
60 60"  
72 72"  
96 96"  
Custom

### Wattage<sup>1</sup>

36"  
L 9W (1200lm)  
M 18W (2229lm)  
H 30W (3522lm)  
48"  
L 12W (1600lm)  
M 24W (2972lm)  
H 40W (4696lm)  
60"  
L 15W (2000lm)  
M 30W (3715lm)  
H 50W (5870lm)  
72"  
L 18W (2400lm)  
M 36W (4458lm)  
H 60W (7044lm)  
96"  
L 24W (3200lm)  
M 48W (5944lm)  
H 80W (9392lm)

### Color Temp<sup>2</sup>

827 2700  
830 3000  
835 3500  
840 4000

### Voltage

U 120/277  
I 120VAC only

### Control (24V)

S Non-dim (Integral)  
D010 0-10V 10% (Integral)  
DFPN Lutron Forward Phase 1%  
120VAC (Integral)  
L3DAE Lutron Hi-lume 1% EcoSystem  
(Integral)  
L3DOE Lutron Hi-lume Premier 0.1%  
EcoSystem (Remote)

### Diffuser

SW Satin opal acrylic

### Finish

16 Clear anodized aluminum  
21 Painted white - RAL 9010 matte  
22 Painted custom color

### Options

AM Accent module



[inter-lux.com/alm](http://inter-lux.com/alm)