


Sigma

Wall sconce with formed aluminum housing and machined end caps. Diffuser is Clear Satin Acrylic. The fixture can be arranged vertically or horizontally.

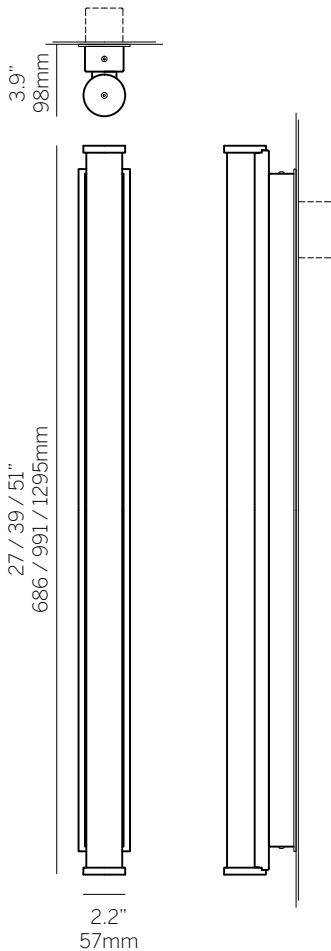

inter•lux

Model 1740		1740
Type		
W	Wall	W
Size		_____
27	27"	
39	39"	
51	51"	
	Custom (63" max)	
Wattage¹		_____
27"		
L	6W (800lm)	
M	12W (1486lm)	
H	20W (2348lm)	
39"		
L	9W (1200lm)	
M	18W (2229lm)	
H	30W (3522lm)	
51"		
L	12W (1600lm)	
M	24W (2972lm)	
H	40W (4696lm)	
Wet location		
27"		
M	10W (750lm)	
39"		
M	14W (1125lm)	
51"		
M	19W (1500lm)	
Color Temp²		_____
827	2700	
830	3000	
835	3500	
840	4000	
Voltage		_____
U	120/277	
I	120VAC only	
Control (24V)³		_____
S	Non-dim (Integral)	
D010	0-10V 10% (Integral)	
DFPN	Lutron Forward Phase 1% 120VAC (Integral)	
L3DAE	Lutron Hi-lume 1% EcoSystem (Integral)	
L3D0E	Lutron Hi-lume Premier 0.1% EcoSystem (Remote)	
Diffuser		
SA	Satin clear acrylic	SA
Finish³		_____
19	Painted anodized aluminum - RAL 9006 matte	
21	Painted white - RAL 9010 matte	
22	Painted custom color	
Options		
EC	Chrome end caps	_____
WL	Wet location	_____

Notes

¹Nominal lumens

²82 CRI standard / 90 CRI available

³For wet location all controls are remote

For up to date technical information, refer to inter-lux.com/alm



inter-lux.com/alm