
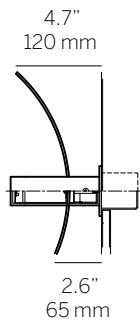
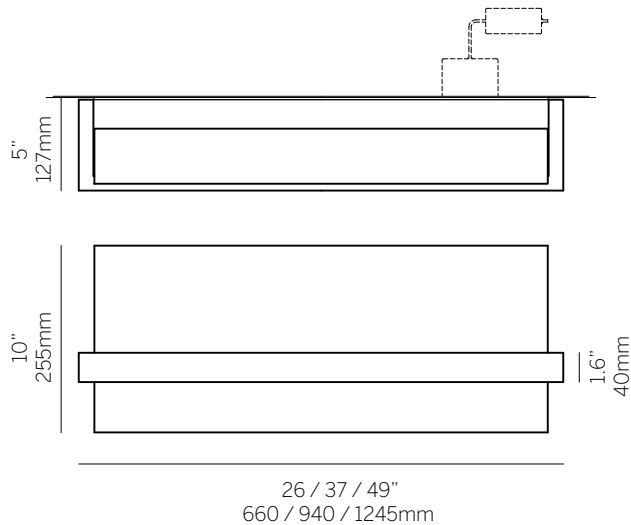


Wing

Wing provides glare-free indirect illumination when mounted horizontally. It is perfect for stairways and corridors with open ceilings.

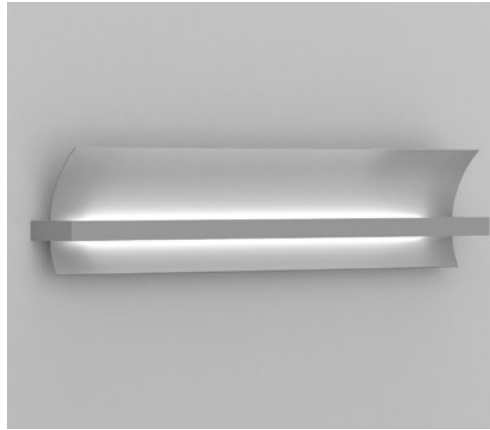

Model 1820 **1820**

Type
W Wall **W**

Size
26 26"
37 37"
49 49"
Custom

Wattage¹

26"
L 6W (800lm)
M 12W (1486lm)
H 20W (2348lm)

37"
L 9W (1133lm)
M 17W (2106lm)
H 28W (3326lm)

49"
L 12W (1533lm)
M 23W (2848lm)
H 38W (4500lm)

Color Temp²

827 2700
830 3000
835 3500
840 4000

Voltage
U 120/277
I 120VAC only

Control (Remote 24V)

S Non-dim
D010 0-10V 10%
DFPN Lutron Forward Phase 1% 120VAC
L3DAE Lutron Hi-lume 1% EcoSystem
L3DOE Lutron Hi-lume Premier 0.1% EcoSystem

Diffuser
SW Satin opal acrylic **SW**

Finish³

19 Painted anodized aluminum - RAL 9006 matte
21 Painted white - RAL 9010 matte
22 Painted custom color

Notes

¹Nominal lumens

²82 CRI standard / 90 CRI available

³Reflector is painted white - RAL 9010, 30% Gloss.



For up to date technical information, refer to inter-lux.com/alm



inter-lux.com/alm