

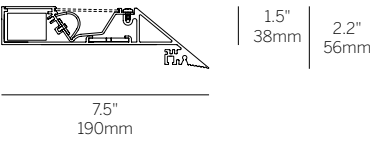


Edgeless Cove

3 Sided Pattern Coffer Submittal

Project Name _____ SO# _____

Fixture Type _____ PO# _____

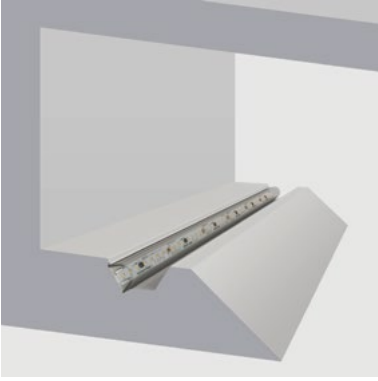

Gypsum Ceiling Mounting
4" minimum offset, 12" typical offset
Can be installed in Cove or Coffer

Ordering Information

| Model | Fixation | Pattern | Length | Power ³ | CRI/CCT ⁴ | Driver ⁵ | Lens | Finish | Options |
|-------|----------|---|--|--------------------|--------------------------|--|------------------|------------------------|----------------------------------|
| WG-EC | RPT | S ¹ PC ² PR ² PZ ² | A A x B A x B x C A x B x A x B | L M H | 927 930 935 940 | X S D010 L3DAE L3DOE DFPN | SSD (std) SDC | W (std) B G F | LEC REC LREC LWR RWR |

Luminaire

- Light source positioned for optimum horizontal spread of illumination.
- Light source is not visible from any viewing angle up to and including direct horizontal view.
- Delivers continuous soft wash of directed light to above surface.
- Satin Diffuser for high efficiency and soft edge beam without striations.
- Removable light source sub assembly for simple installation and maintenance.
- High efficiency linear LED in a range of outputs.
- Integral drivers and through wiring.
- Lengths and angles factory cut to exact field dimensions.
- Mitered corners available with continuous illumination.

Fixation

- RPT = Recessed plaster trim

Pattern

- S = Straight run¹
- PC = Standard patterns coffer 2, 3 or 4 sided with 90° corners²
- PR = Standard patterns raft 2, 3 or 4 sided with 90° corners²
- PZ = Non-standard patterns and/or corners other than 90°, consult factory²

Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25") For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)

Power³

- L = 3.2W/ft low power (24V)
- M = 6.4W/ft medium power (24V)
- H = 10.5W/ft high power (24V)

CRI/CCT⁴

- 90+ CRI minimum (Low/Mid/High)
- 927 = 2700K, (243/450/671 lm/ft)
- 930 = 3000K, (251/464/692 lm/ft)
- 935 = 3500K, (256/474/706 lm/ft)
- 940 = 4000K, (259/478/713 lm/ft)

Driver (integral)⁵

- X = No driver, ordered separately
- S = Standard driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V (remote)
- DFPN = Lutron Forward Phase 1%, 120VAC

Lens

- SSD = Snap On Satin Diffuser (standard)
- SDC = Satin Clear Dust Cover

Finish

- W = White, 20% gloss, RAL9010 (standard)
- B = Black, 20% gloss
- G = Gray, 20% gloss
- F = Custom finished trim, specify RAL

Options

- LEC = Left end cap
- REC = Right end cap
- LREC = Left & Right end caps
- LWR = Left wall return
- RWR = Right wall return

Emergency

- Emergency LED driver available, order separately.

- Standard setup assumes the cove ends at a perpendicular wall and the LED board is setback from the end to minimize light on the perpendicular wall. Contact us for options
- See pattern spec sheet.
- Wattage shown does not include power supplies/drivers.
- Delivered lumens with Snap On Satin diffuser shown.
- Integral driver, except L3DOE (remote only). See power supply page for details.

| Customer Approval | |
|--|------------------|
| <input type="checkbox"/> Approved | Company _____ |
| <input type="checkbox"/> Approved with corrections noted | Signature _____ |
| <input type="checkbox"/> Revise and Resubmit | Print Name _____ |
| | Date _____ |

Original Submission Date _____

Edgeless Cove LED

Submittal - Pattern 3 Sided Coffered

Project Name _____ SO# _____

Fixture Type _____ PO# _____

| System | Qty. | Overall Length | | |
|--------|-------|----------------|-------|-------|
| | | 'A' | 'B' | 'C' |
| 1 | _____ | _____ | _____ | _____ |
| 2 | _____ | _____ | _____ | _____ |
| 3 | _____ | _____ | _____ | _____ |
| 4 | _____ | _____ | _____ | _____ |

Customer Approval Company _____

Approved Signature _____

Approved with corrections noted Print Name _____

Revise and Resubmit Date _____

*overall length of finished mounting surface

