


**WG-EC-...-SSD-W**  
Delivered Lumens Per Foot

| CCT               | Power            |                |                |                 |                 |                 |                              |                 |
|-------------------|------------------|----------------|----------------|-----------------|-----------------|-----------------|------------------------------|-----------------|
|                   | P0<br>[1.5 W/ft] | P1<br>[3 W/ft] | P2<br>[6 W/ft] | P3<br>[10 W/ft] | P4<br>[15 W/ft] | L<br>[2.7 W/ft] | M<br>[5.5 W/ft] <sup>2</sup> | H<br>[8.0 W/ft] |
| 927               | 243              | 470            | 884            | 1358            | 2001            | -               | -                            | -               |
| 930               | 254              | 490            | 920            | 1415            | 2084            | -               | -                            | -               |
| 935               | 263              | 507            | 953            | 1466            | 2182            | -               | -                            | -               |
| 940               | 265              | 520            | 978            | 1505            | 2241            | -               | -                            | -               |
| TW <sup>1</sup>   | 141              | 255            | 457            | 694             | -               | -               | -                            | -               |
| WD <sup>1</sup>   | -                | -              | -              | -               | -               | 204             | 424                          | 613             |
| RGBW <sup>2</sup> | -                | -              | -              | -               | -               | -               | 346                          | -               |




Beam Angle (0-180) = 53.4  
Beam Angle (90-270) = 115.9

|      | Power Multiplier |                |                |                 |                 |                 |                              |                 |
|------|------------------|----------------|----------------|-----------------|-----------------|-----------------|------------------------------|-----------------|
|      | P0<br>[1.5 W/ft] | P1<br>[3 W/ft] | P2<br>[6 W/ft] | P3<br>[10 W/ft] | P4<br>[15 W/ft] | L<br>[2.7 W/ft] | M<br>[5.5 W/ft] <sup>2</sup> | H<br>[8.0 W/ft] |
| 9XX  | 0.12             | 0.23           | 0.44           | 0.67            | 1.00            | -               | -                            | -               |
| TW   | 0.06             | 0.12           | 0.21           | 0.32            | -               | -               | -                            | -               |
| WD   | -                | -              | -              | -               | -               | 0.09            | 0.19                         | 0.28            |
| RGBW | -                | -              | -              | -               | -               | -               | 0.16                         | -               |

- 1 TW lumen data at maximum output (4000K). WD lumen data at maximum output (3000K).
- 2 RGBW lumen data at maximum output with 3000K White LED. M-**RGBW** power level wattage is 7.6W/ft.
- 3 Polar Plot and Isofootcandle diagram are applicable to part number noted; use Multiplier table(s) to approximate other Power / CCT options.

| CCT Multiplier |      |      |      |
|----------------|------|------|------|
| 927            | 930  | 935  | 940  |
| 0.92           | 0.95 | 1.00 | 1.03 |

**WG-EC-RPT-S-...-P2-935-...-SSD-W**  
10'-0" ceiling height

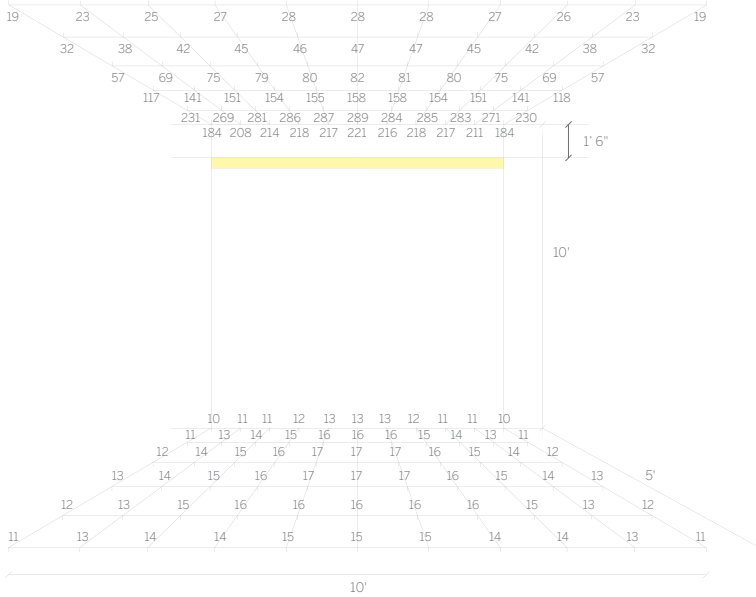

Surface reflectances:

- 80% Ceiling
- 50% Wall
- 20% Floor

Illuminance points are spaced 1'-0" on center.  
Illuminance values are shown in units of foot-candles.

**WG-EC-RPT-S-...-P4-935-...-SSD-W**  
20'-0" ceiling height

