
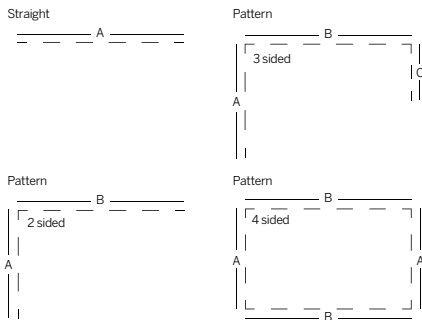



# 20 Linear Plaster-in LED

## Specifications



cut-out dimensions 1.5" wide X length + 1/4"

### Ordering Information

WG-P20LDL	Type	Length	LED <sup>2</sup>	Color <sup>3</sup>	Voltage	Power <sup>3</sup>	Diffuser	Mount	Options
WG-P20LDL	S P <sup>1</sup> PZ <sup>1</sup>	A A x B A x B x C A x B x A x B	L M	827 830 835 840 927 930 935 940	UNV         120	S D010 D3W DES DFPN   DFPN	OD (std) SD	P	C4 (std) C10 C20 C30 WL

### Luminaire

- Thinner than 5/8" drywall depth.
- Continuous, evenly illuminated snap-in lens without visible LED pattern.
- Standard Opal Diffuser for even illumination and no LED appearance. Satin Diffuser for high efficiency and minimal LED appearance.
- Field replaceable LED boards.
- 80+ CRI, 3 steps MacAdam.
- Lengths and angles factory cut to exact field dimensions.
- Standard and custom corners.
- Powder coat painted white - RAL 9010.
- 4' class 2 plenum rated feed cable standard (Options – "C4").

### Type

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane<sup>1</sup>
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory<sup>1</sup>

### Length

- A, B, C = specify feet & inches to the nearest 0.25" (i.e. 6' 5.5") For patterns specify each length (i.e. 2 sided: A x B = 6' 5" x 6'; 3 sided: A x B x C; 4 sided: A x B x A x B)

### LED<sup>2</sup>

- L = Low Power (3.2W/ft)
- M = Mid Power (6.4W/ft)

### Color / Lumens<sup>3</sup>

- 80+ CRI minimum (Low/Mid)
- 827 = 2700K (316/534 lm/ft)
- 830 = 3000K (343/579 lm/ft)
- 835 = 3500K (343/579 lm/ft)
- 840 = 4000K (355/601 lm/ft)
- For 90+ CRI specify 927, 930, etc

### Voltage

- UNV = 120 - 277V
- 120 = 120V (DFPN only)

### Power Supply (remote)<sup>3</sup>

- S = standard driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- D3W = Lutron, 1%, 3-wire dimming, 120-277V
- DES = Lutron, 1%, EcoSystem E1/E2 digital dimming, 120-277V
- DFPN = Lutron 1% forward phase with neutral, 120V only

### Diffuser

- OD = Opal diffuser (standard)
- SD = Satin diffuser

### Mounting

- P = Plaster-in

### Options

- C4 = 4' tray cable (plenum rated) (standard)
- C10 = 10' tray cable (plenum rated)
- C20 = 20' tray cable (plenum rated)
- C30 = 30' tray cable (plenum rated)
- WL = wet location (protected ceiling applications)
- Contact factory for emergency lighting options
- To Specify multiple options select the appropriate grouped codes from the dropdown eg. C10-WL

- 1 See pattern specs sheet.
- 2 Wattage shown does not include power supplies/drivers.
- 3 Delivered lumens with satin diffuser shown. Lumens for CRI 90(+), are about 16% lower compared to standard CRI 80(+).
- 4 Remote power supply required. See power supply page for details.



# 20 Linear Plaster-in LED

## Dimensions

