



Fuse

Fuse is used as general illumination as well as decorative feature either individually or suspended in groups. It has an even glow of light and is available fully dimmable.

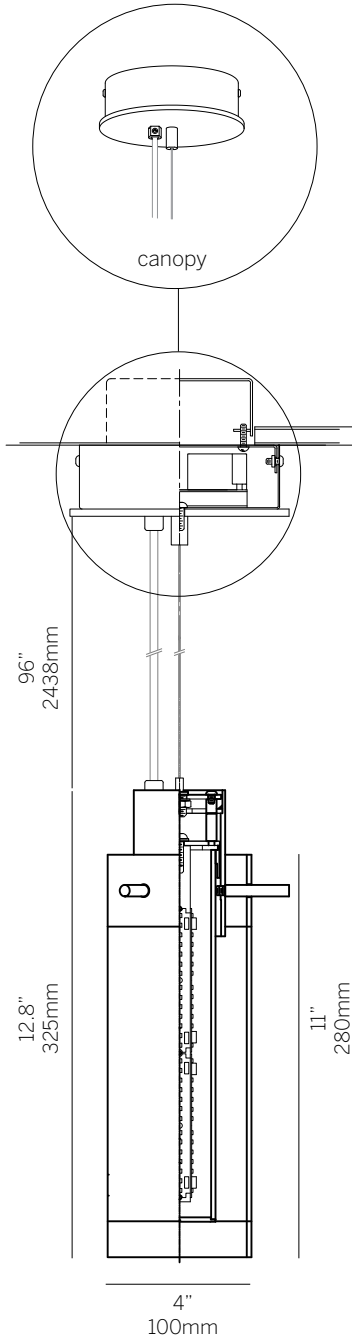

Pendant

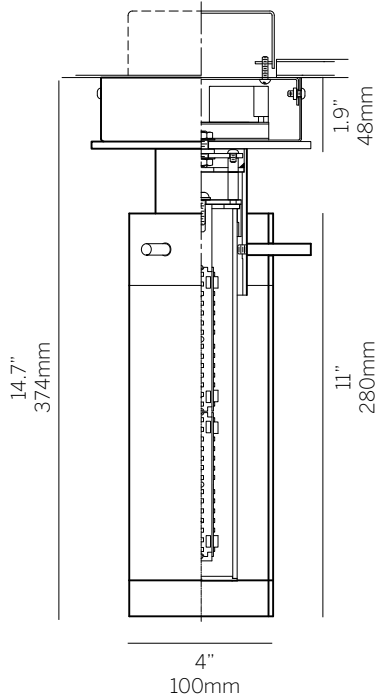

Ceiling

Notes

- ¹Nominal lumens
- ²82 CRI standard / 90 CRI available
- ³Canopy finish matches housing
- ⁴96" clear insulated cable standard

inter•lux

| | | |
|-------------------------------|---|-----------|
| Model | 1571 | 1571 |
| Type | _____ | |
| P | Pendant | |
| C | Ceiling | |
| Size | _____ | |
| 11 | 11" | |
| Custom | | |
| Wattage¹ | _____ | |
| L | 8W (1066lm) | |
| Color Temp² | _____ | |
| 827 | 2700 | |
| 830 | 3000 | |
| 835 | 3500 | |
| 840 | 4000 | |
| Voltage | _____ | |
| U | 120/277 | |
| 1 | 120VAC only | |
| Control (24V) | _____ | |
| S | Non-dim (Integral) | |
| D010 | 0-10V 10% (Integral) | |
| DFPN | Lutron Forward Phase 1% 120VAC (Integral) | |
| L3DAE | Lutron Hi-lume 1% EcoSystem (Integral) | |
| L3D0E | Lutron Hi-lume Premier 0.1% EcoSystem (Remote) | |
| Diffuser | _____ | |
| CG | Clear, etched acrylic with inner diffuser | CG |
| Finish³ | _____ | |
| 12 | Satin nickel | |
| 19 | Painted anodized aluminum - RAL 9006 matte | |
| 21 | Painted white - RAL 9010 matte | |
| 22 | Painted custom color | |
| Options | _____ | |
| CC | Clear insulated cable (standard) ⁴ | |
| WC | White cable | |
| BC | Black cable | |



For up to date technical information, refer to inter-lux.com/alm



inter-lux.com/alm