

Ring UD

A Direct/Indirect luminaire, the Ring UD will fill any space with light and create a voluminous effect. Offered in a wide variety of standard diameters and lumen packages, the Ring is available for as much modification as your imagination will allow, including RGB, ovals and squares.



Model 1692

Type

P Pendant

Size

24 24"
36 36"
48 48"
60 60"
72 72"
Custom

Wattage¹ direct²

24"
LD 17W (2267lm)
MD 34W (4211lm)
RGBD 60W (1551lm)

36"

LD 26W (3467lm)
MD 52W (6440lm)
RGBD 92W (2397lm)

48"

LD 35W (4667lm)
MD 70W (8669lm)
RGBD 125W (3243lm)

60"

LD 45W (6000lm)
MD 90W (11145lm)
RGBD 162W (4230lm)

72"

LD 54W (7200lm)
MD 108W (13374lm)
RGBD 195W (5076lm)

1692

P

indirect²

LI 17W (2267lm)
MI 34W (4211lm)
RGBI 60W (1551lm)

LI 26W (3467lm)
MI 52W (6440lm)
RGBI 92W (2397lm)

LI 35W (4667lm)
MI 70W (8669lm)
RGBI 125W (3243lm)

LI 45W (6000lm)
MI 90W (11145lm)
RGBI 162W (4230lm)

LI 54W (7200lm)
MI 108W (13374lm)
RGBI 195W (5076lm)

Notes

¹Nominal lumens

²For no direct or indirect light specify 00

³82 CRI standard / 90 CRI available

⁴Canopy finish matches housing

⁵96" clear insulated cable standard

Color Temp³

827 2700
830 3000
835 3500
840 4000
RGB RGB

Voltage

U 120/277
1 120VAC only

Control (Remote 24V)

S Non-dim
D010 0-10V 10%
DFPN Lutron Forward Phase 1% 120VAC
L3DAE Lutron Hi-lume 1% EcoSystem
L3DOE Lutron Hi-lume Premier 0.1%
EcoSystem
DMX DMX dimming

Diffuser

SW Satin opal acrylic (bottom)
CB Extruded aluminum cover (bottom)
SA Satin clear acrylic (top)
CT Extruded aluminum cover (top)


Finish⁴

19 Painted anodized aluminum -
RAL 9006 matte
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color


Options

CE Center canopy
SC Straight cables
SA Single circuit
DC Dual circuit
CC Clear insulated cable
(standard)⁵
WC White cable
BC Black cable



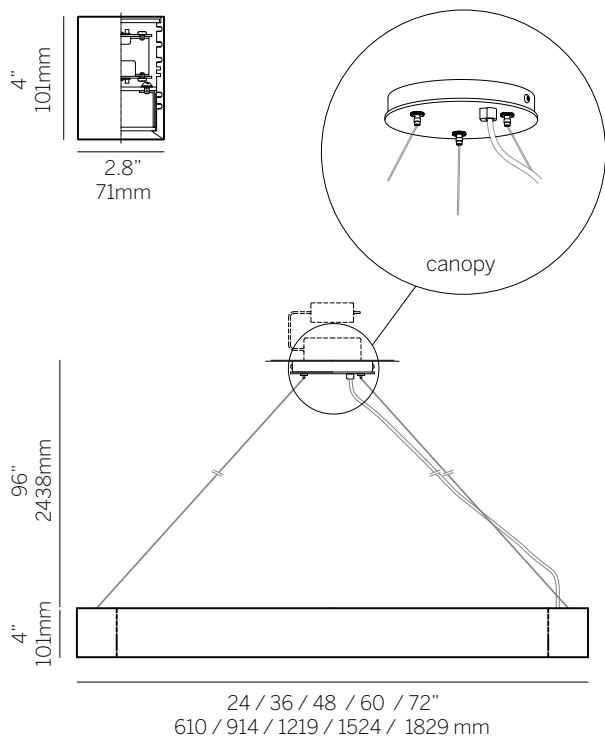

Center Canopy (standard)
(suspension varies with fixture size please confirm with factory)

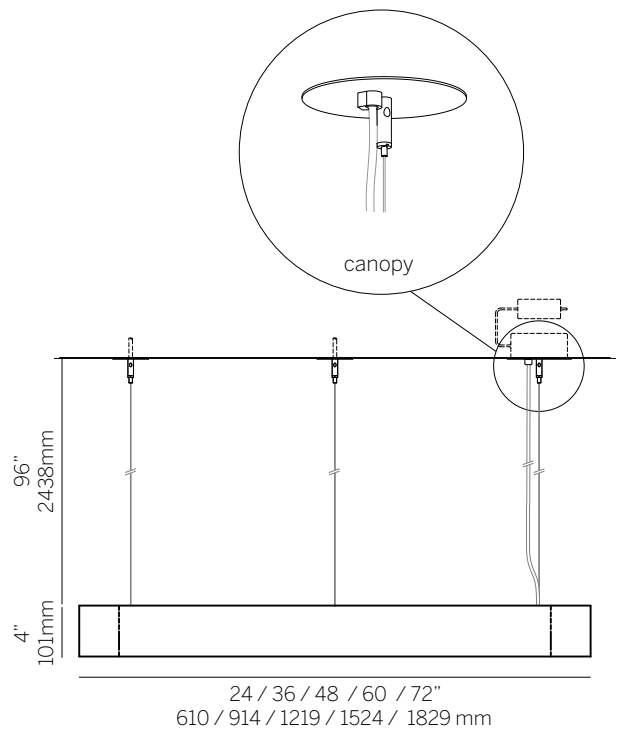

Straight Cables