









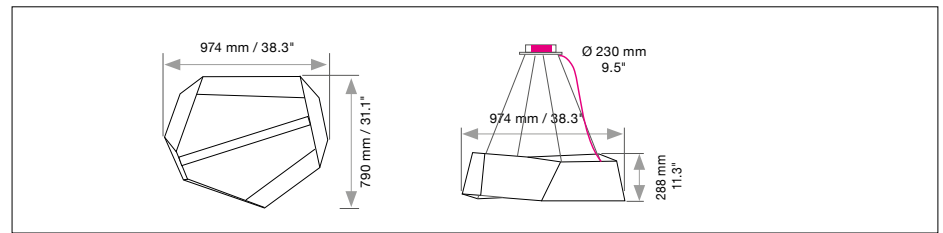


ANGOLO

Housing: Aluminum housing, powder coated.
Design: MICHAEL SCHMIDT

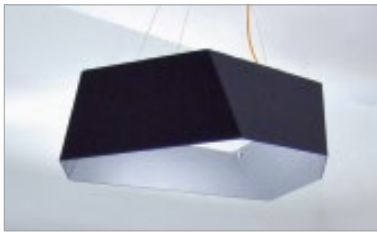

Size: L x W x H mm			Inches	LED Watt	Lumen ¹	Weight kg / lbs ²	Item No.	Direct LED	Dimming	Indirect LED	Finish	Power supply cable	Mounting version
Size	974 x 790 x 288 mm	38.3 x 31.1 x 11.3"		13/6	697/278	14 / 30.8	700.	x x .	x x .	x x .	x x .	x x x .	x
LED 24V CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		Standard:	Neutral-white		4000 K		x x x .	40.	x x .	40.	x x .	x x x .	x
		Optional:	Warm-white		3000 K		x x x .	30.	x x .	30.	x x .	x x x .	x
			Extra warm-white		2700 K		x x x .	27.	x x .	27.	x x .	x x x .	x
Dimming		Standard:	0 - 10 V				x x x .	x x .	52.	x x .	x x .	x x x .	x
Finish		Standard:	12 white, powder coated, similar RAL 9003		Optional (Powder coated):	10 black fine textured	x x x .	x x .	x x .	x x .	--	x x x .	x
Power supply cable		Standard:	Z 75 red		Optional:	Z 70 Silver							
						Z 72 grey	x x x .	x x .	x x .	x x .	x x .	--	x
Mounting Version						4-point suspension	x x x .	x x .	x x .	x x .	x x .	x x x .	E
Including steel cable suspension 3000 mm / 118" and power supply cable 3000 mm / 118"													
<div>  <div> Canopy: Type/ Size mm / inch Ø cover plate / body / H DB 230 Ø 230 / 210 / 60 mm / 9.5 / 8.3 / 2.3" </div> <div> Included with Mounting version E </div> <div> Protective rating IP 20 </div> </div> <div> Color: 12 white, similar RAL 9003, contact factory for other finishes Canopy mounts to 4" octagonal junction box. </div>													
								700.	--	--	--	--	E
Complete order number Input voltage for all external power supply units and canopy is 120-277 VAC 47-63 Hz													

