


CIRCOLO

I-Version

Housing: Aluminum profile with integrated opal diffuser
 Design: SATTLER, Patented




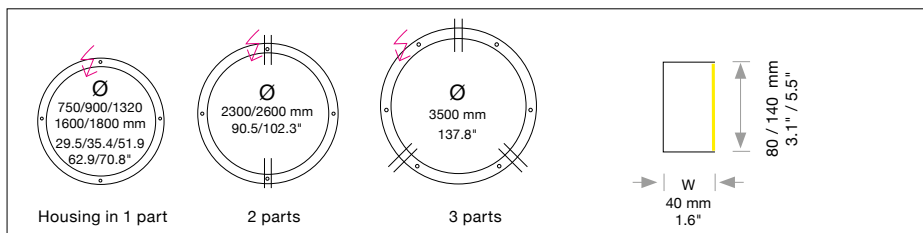







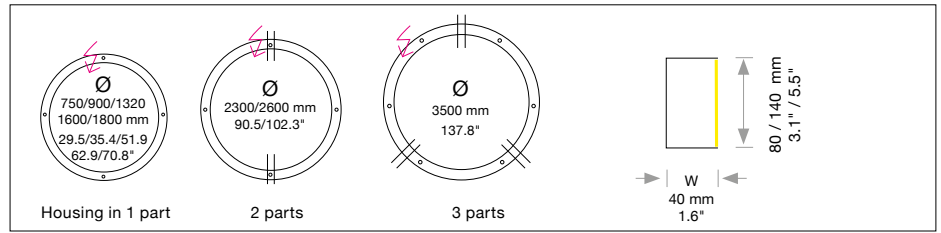







Size: Ø x H x W mm / inches	LED Watt	Lumen ¹	Weight kg / lbs ²	Item No.	LED Row 1	Dimming	LED Row 2	Finish	Power supply cable	Total height	Mounting version
Sizes											
Ø 750 / 29.5" H 80 / 3.1" W 40 / 1.6"	48	3136	8 / 17.6	252.	x x.	x x.	x x.	x x.	x x x.	80	x
Ø 900 / 35.5" H 80 / 3.1" W 40 / 1.6"	57	3786	10 / 22.0	253.	x x.	x x.	x x.	x x.	x x x.	80	x
Ø 1320 / 51.9" H 80 / 3.1" W 40 / 1.6"	83	5724	20 / 44.0	254.	x x.	x x.	x x.	x x.	x x x.	80	x
Ø 1600 / 62.9" H 80 / 3.1" W 40 / 1.6"	101	6909	25 / 55.1	255.	x x.	x x.	x x.	x x.	x x x.	80	x
Ø 1800 / 70.8" H 80 / 3.1" W 40 / 1.6"	114	7780	30 / 66.0	256.	x x.	x x.	x x.	x x.	x x x.	80	x
Ø 2300 / 90.5" H 80 / 3.1" W 40 / 1.6"	145	10,035	35 / 77.2	257.	x x.	x x.	x x.	x x.	x x x.	80	x
Ø 2600/102.3" H 80 / 3.1" W 40 / 1.6"	164	11,117	40 / 88.0	258.	x x.	x x.	x x.	x x.	x x x.	80	x
Ø 3500/137.8" H 80 / 3.1" W 40 / 1.6"	220	14,927	53 / 117.0	259.	x x.	x x.	x x.	x x.	x x x.	80	x
From H 140 we recommend a second LED row											
Ø 1320 / 51.9" H 140 / 5.5" W 40 / 1.6"	83	6282	20 / 44.0	1600.	x x.	x x.	x x.	x x.	x x x.	140	x
Ø 1600 / 62.9" H 140 / 5.5" W 40 / 1.6"	101	7702	25 / 55.1	1601.	x x.	x x.	x x.	x x.	x x x.	140	x
Ø 1800 / 70.8" H 140 / 5.5" W 40 / 1.6"	114	8699	30 / 66.0	1602.	x x.	x x.	x x.	x x.	x x x.	140	x
Ø 2300 / 90.5" H 140 / 5.5" W 40 / 1.6"	145	11,327	35 / 77.2	1603.	x x.	x x.	x x.	x x.	x x x.	140	x
Ø 2600/102.3" H 140 / 5.5" W 40 / 1.6"	164	12,451	40 / 88.0	1604.	x x.	x x.	x x.	x x.	x x x.	140	x
Ø 3500/137.8" H 140 / 5.5" W 40 / 1.6"	220	16,849	53 / 117.0	1605.	x x.	x x.	x x.	x x.	x x x.	140	x
LED 24V		Standard: Neutral-white	4000 K	x x x x.	40.	x x.	x x.	x x.	x x x.	x x x.	x
		Optional:		x x x x.	35.	x x.	x x.	x x.	x x x.	x x x.	x
		Natural-white	3500 K	x x x x.	30.	x x.	x x.	x x.	x x x.	x x x.	x
		Warm-white	3000 K	x x x x.	27.	x x.	x x.	x x.	x x x.	x x x.	x
		Extra warm-white	2700 K	x x x x.	80.	x x.	x x.	x x.	x x x.	x x x.	x
		Tunable white*	2700 - 6500 K	x x x x.	60.	x x.	00.	x x.	x x x.	x x x.	x
		RGB color control*		x x x x.	60.	x x.	40.	x x.	x x x.	x x x.	x
		RGB + Neutral-White*	4000 K	x x x x.	60.	x x.	40.	x x.	x x x.	x x x.	x
		*Only available with DMX. Combinations up to two rows of LED possible.									
Dimming		Standard: 0 - 10 V		x x x.	x x.	51.	x x.	x x.	x x x.	x x x.	x
		Optional:		x x x.	x x.	91.	x x.	x x.	x x x.	x x x.	x
		Lutron EcoSystem**		x x x.	x x.	31.	x x.	x x.	x x x.	x x x.	x
		DMX									
		First digit indicates Dimming protocol. Second digit indicates number of rows of LED. Codes shown with 1x row of LED (Standard). For 2x rows of LED replace the second digit accordingly.									
		**Lutron EcoSystem driver must be ordered separately and remote mounted with mounting versions A, C, G, K, R.									

CIRCOLO

I-Version

Housing: Aluminum profile with integrated opal diffuser
 Design: SATTLER, Patented





						Item No.	LED Row 1	Dimming	LED Row 2	Finish	Power supply cable	Total height	Mounting version				
Finish  12 white, powder coated, similar to RAL 9003 Standard:  10 black fine textured  11 white, similar to RAL 9010  30 anthracite fine textured  33 sand silver fine textured  34 bronze satined  35 gold  36 brass  37 bronze fine textured  38 copper  22 aluminum polished  27 brush-finished aluminum Optional (Premium):																	
Power supply cable Standard:  Z 70 silver  Without power cable 000 Current-carrying F, R, T, K Optional:  Z 71 white  Z 73 black																	

CIRCOLO

I-Version

Housing: Aluminum profile with integrated opal diffuser
 Design: SATTLER, Patented

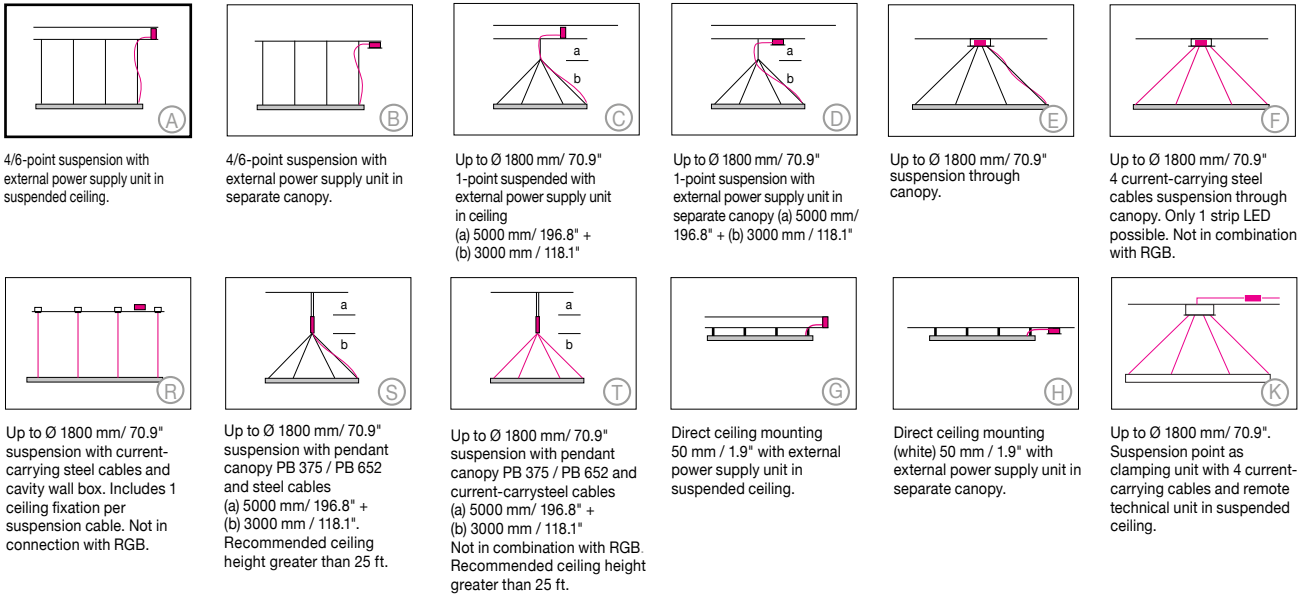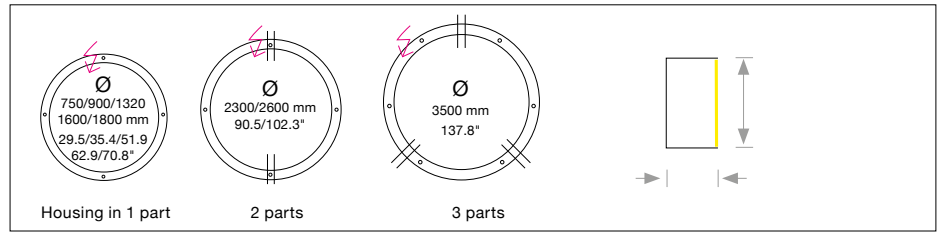

A, B, C, D, G, H, R, K = Distance of external power supply unit to light fixture max. 10m / 394"

E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Total height	Mounting Version
X X X X.	X X.	X X.	X X.	X X.	X X X.	X X X.	-


	Power supply units:		
	Type / Size mm / inch L x W x H	Included with Mounting version	Protective rating
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A,C,G,R,K (up to \varnothing 1320 mm)	IP 20
DE 2F	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"	A,C,G,R,K (up to \varnothing 2600 mm)	IP 20
DE 3F	360 x 400 x 85 mm / 14.2 x 15.7 x 3.3"	A,G (up to \varnothing 3500 mm)	IP 20

Input voltage for all external power supply units and canopy is **120-277 VAC 50-60 Hz**

	Canopy: (1 LED row)		
	Type / Size mm / inch \varnothing cover plate / body / H	Included with Mounting version	Protective rating
DB 290	\varnothing 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B,D,E,F,H (up to \varnothing 1320 mm)	IP 20
DB 350	\varnothing 510 / 470 / 60 mm / 20.0 x 18.5 / 2.3"	B,D,E,F,H (up to \varnothing 2600 mm)	IP 20
DB 510	\varnothing 145 / 133 / 55 mm / 5.7 x 5.2 / 2.2"	B,H (up to \varnothing 3500 mm)	IP 20
PB 375	\varnothing 90 H 375 mm / 3.5 x 14.8"	S,T (up to \varnothing 1320 mm)	IP 20
PB 652	\varnothing 90 H 652 mm / 3.5 x 25.7"	S,T (up to \varnothing 1800 mm)	IP 20
DB 145	\varnothing 145 / 133 / 55 mm / 5.7 x 5.2 / 2.2"	K (up to \varnothing 1800 mm)	IP 20

Color: 12 white, similar RAL 9003, contact factory for other finishes
 Canopy mounts to 4" octagonal junction box.

Optional



Ceiling fixation included with mounting versions A, C, G

Consisting of a cavity ceiling box with 80 mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, C, G.

200. 00. 00. 00. 12 (white)