



DOPPIO
DIRECT / INDIRECT

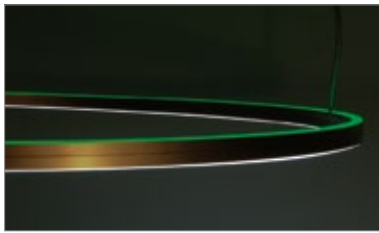


Housing: Circular aluminum profile with integrated acrylic covers.
Design: SATTLER

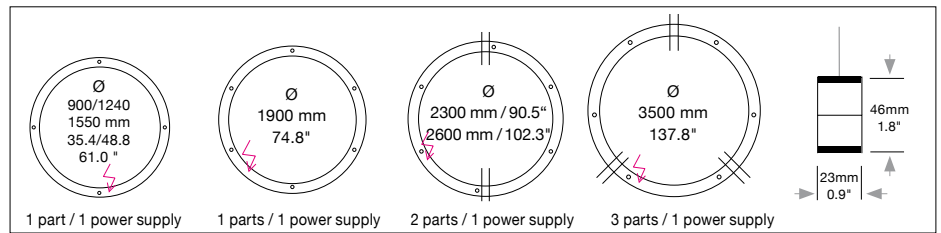


	Size: L x W x H mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version	
Sizes	Ø 900 mm	35.4"	55 / 23	2,352 / 1,094	9 / 19.8	779.	X X.	X X.	X X.	X X.	X X X.	X	
	Ø 1240 mm	48.8"	72 / 30	3,027 / 1,300	10 / 22.0	780.	X X.	X X.	X X.	X X.	X X X.	X	
	Ø 1550 mm	61.0"	88 / 39	3,931 / 1,818	11 / 24.3	781.	X X.	X X.	X X.	X X.	X X X.	X	
	Ø 1900 mm	74.8"	110 / 46	4,592 / 2,120	12 / 26.5	782.	X X.	X X.	X X.	X X.	X X X.	X	
	Ø 2300 mm	90.5"	140 / 60	5,975 / 2,779	19 / 41.9	783.	X X.	X X.	X X.	X X.	X X X.	X	
	Ø 2600 mm	102.3"	165 / 69	6,702 / 3,067	21 / 46.3	784.	X X.	X X.	X X.	X X.	X X X.	X	
Indirect 	Ø 3500 mm	137.8"	210 / 88	8,753 / 4,178	29 / 63.9	785.	X X.	X X.	X X.	X X.	X X X.	X	
	Direct 												
Direct and indirect light separately switchable. If ordered with dimmer also separately dimmable													
DIRECT LED 24V CRI > 90 *CRI > 80 			Warm-white	3000 K	(Standard)	X X X.	30.	X X.	X X.	X X.	X X X.	X	
			Neutral-white	4000 K	(Optional)	X X X.	40.	X X.	X X.	X X.	X X X.	X	
			Extra warm-white	2700 K	(Optional)	X X X.	27.	X X.	X X.	X X.	X X X.	X	
			Extra warm-white	2200 K*	(Optional)	X X X.	22.	X X.	X X.	X X.	X X X.	X	
INDIRECT LED 24V CRI > 90 *CRI > 80 			Warm-white	3000 K	(Standard)	X X X.	X X.	X X.	30.	X X.	X X X.	X	
			Neutral-white	4000 K	(Optional)	X X X.	X X.	X X.	40.	X X.	X X X.	X	
			Extra warm-white	2700 K	(Optional)	X X X.	X X.	X X.	27.	X X.	X X X.	X	
			Extra warm-white	2200 K*	(Optional)	X X X.	X X.	X X.	22.	X X.	X X X.	X	
			RGB color control*		(Optional)	X X X.	X X.	X X.	60.	X X.	X X X.	X	
*(only in combination with dimming DMX, DALI)													
Dimming 			Dimmable 0 - 10 V		(Standard)	X X X.	X X.	52.	X X.	X X.	X X X.	X	
			DMX (RGB possible)		(Optional)	X X X.	X X.	32.	X X.	X X.	X X X.	X	
			LUTRON (contact factory)		(Optional)	X X X.	X X.	72.	X X.	X X.	X X X.	X	
Finishes	(Standard)		11	white	(Optional)	X X X.	X X.	X X.	X X.		X X X.	X	
			22	aluminum polished									
			27	brush-finished aluminum									
			30	anthracite									
			32	crocodile black									
			33	sand silver fine textured									
	XX Custom finish		35	gold									
			36	brass									
			37	bronze fine textured									
			38	copper									
			10	black fine textured									
Power Supply Cable (Standard)	Z 70 Silver	(Optional)		Z 71	white	X X X.	X X.	X X.	X X.	X X.		X	
				Z 72	grey								
				Z 73	black								
		Z 74	orange										
		Z 75	red										
		Z 76	green										
When using current carrying steel cables in Mounting Versions F, K, R, T leave this section blank													

1) Net lumen output: Losses due to diffusers and reflectors are considered.
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
2) Weight of lights without remote technical unit or canopy.


DOPPIO DIRECT / INDIRECT

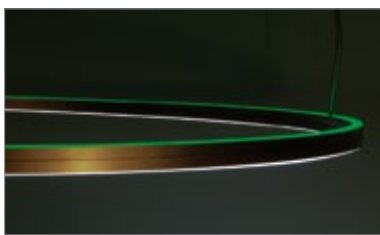


Housing: Circular aluminum profile with integrated acrylic cover on the downside.
Design: SATTLER

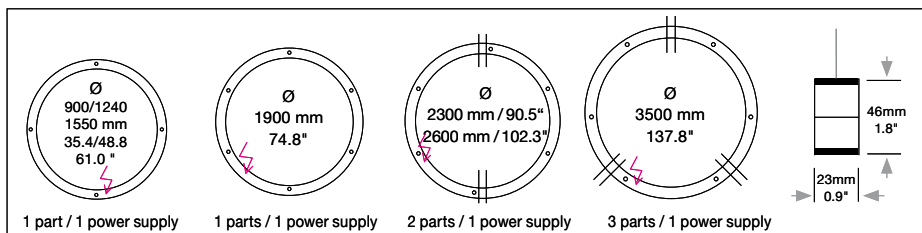


Mounting Version




Standard
up to Ø 1900 mm / 74.8"
4-point suspension
up to Ø 3500 mm
6-point suspension
with external power supply
unit in suspended ceiling




up to Ø 1900 mm / 74.8"
4-point suspension
up to Ø 3500 mm
6-point suspension
with external power supply
unit in separate canopy




up to Ø 1900 mm / 74.8"
suspension through canopy




up to Ø 1900 mm / 74.8"
4 current-carrying steel
cables. Not in combination
with RGB




up to Ø 1900 mm / 74.8"
Suspension with current-
carrying steel cables and
cavity wall box. Not in
combination with RGB.



up to Ø 1900 mm / 74.8"
Suspension with pendant
canopy PB 656
and steel cables
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"



up to Ø 1900 mm / 74.8"
Suspension with pendant
canopy PB 656 and current-
carrying steel cables.
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"
Not in combination with RGB.



up to Ø 1900 mm / 74.8"
Suspension point as clamp-
ing unit with 4/6 cables
and remote technical unit in
suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, R, K = Distance of external power supply unit to light fixture max. 10m / 394".

E, F, S, T, K = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm/197"; Version F,R 3000mm/118";
Version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number


Typ	Dimensions of external power supply units			For use with Mounting Version
	Size mm / inch	L	W H	
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"			A,R (up to Ø 1900mm)
DE 2F	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"			A,R (up to Ø 3500mm)

Typ	Dimensions of canopy			For use with Mounting Version
	Size mm / inch	Ø cover plate / body / H		
DB 350	Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"			B,E,F, (up to Ø 1900 mm)
DB 500	Ø 510 / 470 / 60 mm / 20.0 x 18.5 / 2.3"			B, (up to Ø 3500 mm)
PB 656	Ø 90 H 656 mm / 3.5 x 25.8"			S, T

Canopy finish: white (11) contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

Optional



Ceiling mounting version A

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.