




DOPPIO LINEA DIRECT / INDIRECT

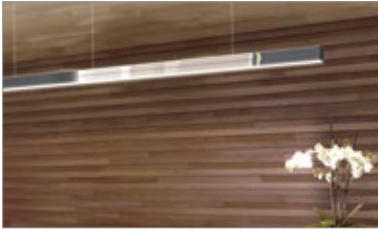


Housing: Aluminum profile with integrated acrylic
Design: SATTLER

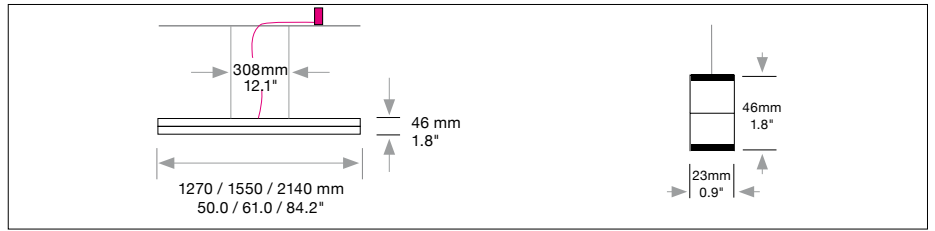


Mounting Version




2-point suspension with external power supply unit in suspended ceiling



Suspension through canopy



Current-carrying steel cables. Not in combination with RGB



Suspension with current-carrying steel cables and cavity wall box. Not in connection with RGB.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
x x x.	x x.	x x.	x x.	x x.	x x x	.

A, R = Distance of external power supply unit to light fixture max. 10m / 394".

Including steel cable suspension 2000mm / 78.7"
or/and power supply cable 2000mm / 78.7"



x x x.	x x.	x x.	x x.	x x.	x x x	x
--------	------	------	------	------	-------	---

Complete order number

Dimensions of external power supply units

Typ	Size mm / inch			For use with Mounting Version
	L	W	H	
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, R		
In combination with RGB				
DE 2F	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"	A, R		


Dimensions of canopy

Typ	Size mm / inch		For use with Mounting Version
	L	W	
DBL 390	up to Ø 2140 mm		F / E
	L 390 x W 70 x H 70 mm		
	L 15.3 x W 2.7 x H 2.7"		
In combination with RGB			
DBL 490	up to Ø 1550 mm		F / E
	L 492 x W 70 x H 70 mm		
	L 19.4 x W 2.7 x H 2.7"		

Canopy finish: white (11)
contact factory for other finishes

USA/Canada: Canopy mounts to 4" single junction box.

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**



Jiq l f ip jf n

"ch fo qcnb qphnchap lmcib
= cfcha ij hcha box xdbowedeublk cSble (*" _ _ !%#z Ø dund
_ efsI cohe}z White powder coated finish.

