


DOPPIO LINEA Direct



Housing: Aluminum profile with integrated acrylic
Design: SATTLER

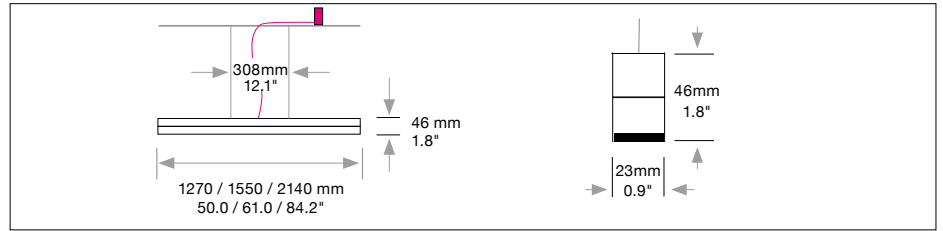


Sizes	Size: Length mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
 Direct	1270 mm	50.0"	23	1,197	2.0 / 4.4	794.	x x.	x x.	x x.	x x.	x x x.	x
	1550 mm	61.0"	28	1,465	2.5 / 5.5	795.	x x.	x x.	x x.	x x.	x x x.	x
	2140 mm	84.2"	39	2,016	3.0 / 6.6	796.	x x.	x x.	x x.	x x.	x x x.	x
Standalone fixture, not to be installed in a row "as is". Consult factory for continuous runs. A coupler to join and align the fixtures is required to be ordered <u>upfront</u>.												
LED 24V CRI > 90 *CRI > 80		Warm-white Neutral-white Extra warm-white Extra warm-white	3000 K 4000 K 2700 K 2200 K*	(Standard) (Optional) (Optional) (Optional)	x x x. x x x. x x x. x x x.	30. 40. 27. 22.	x x. x x. x x. x x.	x x. x x. x x. x x.	x x. x x. x x. x x.	x x x. x x x. x x x. x x x.	x x x x	
Dimming		Dimmable 0 - 10 V DMX (RGB possible) LUTRON (contact factory)	(Standard) (Optional) (Optional)	x x x. x x x. x x x.	51. 31. 71.	x x. x x. x x.	00. 00. 00.	x x. x x. x x.	x x x. x x x. x x x.	x x x		
Finish	 Standard: 12 white, powder coated, similar RAL 9003	Optional (Powder coated): 11 white, similar RAL 9010 10 black fine textured 30 anthracite fine textured 32 crocodile black 33 sand silver fine textured 35 gold 36 brass 37 bronze fine textured 38 copper Optional (Premium): 22* polished aluminum 27* brushed aluminum	Consult factory for Custom finishes	x x x. x x. x x. x x. x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x. x x. x x. x x. x x. x x.	x x x. x x. x x. x x. x x. x x. x x. x x. x x. x x.	x x x x x x x x x x				
Power Supply Cable	 Standard Z 70 Silver	Optional Z 71 white Z 72 grey Z 73 black Z 74 orange Z 75 red Z 76 green	Separate power cable not required 000 steel current-carrying suspension cables	x x x. x x. x x. x x. x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x. x x. x x. x x. x x. x x.	x x x x x x x x x x				


DOPPIO LINEA Direct




Housing: Aluminum profile with integrated acrylic
Design: SATTLER

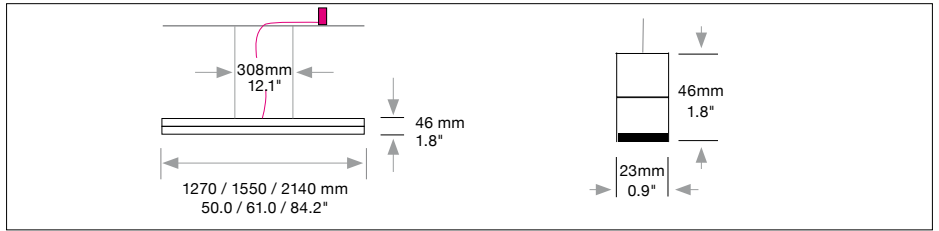


Mounting Version




2-point suspension with external power supply unit in suspended ceiling



suspension through canopy



current-carrying steel cables. Not in combination with RGB



Suspension with current-carrying steel cables and cavity wall box. Not in connection with RGB.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, R = Distance of external power supply unit to light fixture max. 10m / 394".

Including steel cable suspension 2000mm / 78.7"
or/and power supply cable 2000mm / 78.7"



X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Dimensions of external power supply units

Typ	Size mm / inch	For use with Mounting Version
	L W H	
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, R

Dimensions of canopy


Typ	Size mm / inch	For use with Mounting Version
DBL 390	up to Ø 2140 mm L 390 x W 70 x H 70 mm L 15.3 x W 2.7 x H 2.7"	F, E

Canopy finish: white (11)
contact factory for other finishes

USA/Canada: Canopy mounts to 4" single junction box.

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

Optional



Ceiling mounting version A

200. 00. 00. 00. 11 (white)
Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.

