


ELLIPSE LIGHT + ACOUSTIC




Housing: Aluminum profile with an integrated opal diffuser and a fabric covering as a light and acoustic diffuser.


Design: SATTLER

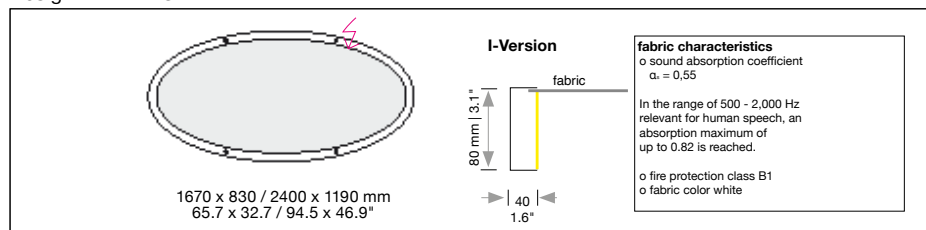


Mounting Version




4-point suspension with external power supply unit in suspended ceiling.




4-point suspension with external power supply unit in separate canopy.




Suspension through canopy.




4 current-carrying steel cables suspension through canopy. Only 1 strip LED possible.




Suspension with current-carrying steel cables and cavity wall box. Includes 1 ceiling fixation per suspension cable.




Suspension with pendant canopy PB 375 / PB 652 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1". Recommended ceiling height greater than 25 ft.




Suspension with pendant canopy PB 375 / PB 652 and current-carrying steel cables. (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1". Recommended ceiling height greater than 25 ft.



Direct ceiling mounting 50 mm / 1.9" with external power supply unit in suspended ceiling.



Direct ceiling mounting (white) 50 mm / 1.9" with external power supply unit in separate canopy.



Suspension point as clamping unit with 4 current-carrying cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	

A, B, G, H, R = Distance of external power supply unit to light fixture max. 10m / 394"

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension 1670 x 830 => 550 mm / 21.6", 2399 x 1190 => 750 mm / 29.5"

Including steel cable suspension 5000 mm / 197" ; Version F, R, S, T 5000 / 3000 mm / 197"/118" and/or power supply cable 5000 mm / 197"



---	---	---	---	---	---	---

Complete order number


Power supply units: (1 LED rows)			
Type / Size mm / inch	L x W x H	Included with Mounting version	Protective rating
DE 1F	363 / 143 / 56 mm / 14.2 / 5.6 / 2.2"	A, G, R, K (1670 x 830 mm)	IP 20
DE 2F	363 / 283 / 56 mm / 14.2 / 11.1 / 2.2"	A, G (2400 x 1190 mm)	IP 20

Input voltage for all external power supply units and canopy is 120-277 VAC 50-60 Hz

Canopy: (1 LED row)			
Type / Size mm / inch	Ø cover plate / body / H	Included with Mounting version	Protective rating
DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F, H (1670 x 830 mm)	IP 20
DB 350	Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, E, F, H (2400 x 1190 mm)	IP 20
PB 375	Ø 90 H 375 mm / 3.5 x 14.8"	S, T (1670 x 830 mm)	IP 20
PB 652	Ø 90 H 375 mm / 3.5 x 14.8"	S, T (2400 x 1190 mm)	IP 20
DB 145	Ø 145 / 133 / 55 mm / 5.7 x 5.2 / 2.2"	K (1670 x 830 mm)	IP 20




Ø body 90 mm / 3.5"



Color: 12 white, similar RAL 9003,
contact factory for other finishes
Canopy mounts to 4" octagonal junction box.

Optional



Ceiling fixation included with mounting versions A, G

Consisting of a cavity ceiling box with 80 mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, G.

200. 00. 00. 00. 12 (white)