

20 Linear Mini Edgeless Cove

- Extremely small knife-edge cove utilizing the 20Linear for general indirect distribution.
- Continuous mounting to any desired length.
- Luminaire has opal or satin diffuser options for even illumination, elimination of glare and high efficiency.
- Trimless for seamless integration into any drywall surface.
- Straight runs and configurations with factory corners in exact lengths as specified.
- 90+ CRI, 3 Steps MacAdam delivering excellent color rendering.
- Choice of White, RGBW and Warm Dim to emulate incandescent.
- Identical LED technology used throughout all Whitegoods Linears, Coves and Perimeter products deliver consistent quality and performance throughout a project.
- Made in USA.
- 5-year warranty.



Housing Precision extruded aluminum for true dimensions and tolerances
Integration into any ceiling type
All low voltage connections made in the housing
Luminaires snaps into the housing without tools
Finish: white and custom

Integration Fixation into gypsum, hard ceilings and all grid ceiling types

Distribution Wide indirect distribution fully illuminates the cove and redirects light into the adjacent space

LED Constant Voltage, 90+ CRI, 3 Steps MacAdam
120 nominal lumens/watt average (see spec sheet for delivered lumens)
Warm Dim to emulate incandescent when dimming; 75 nominal lumens per watt average
RGBW for color changing applications; 50 nominal lumens per watt average
L70 (TM21 Projected 85C) Static White = 60,000 hours
RGBW = 50,000 hours, WD = 36,000 hours

Lens SD - Satin Clear Diffuser provides high efficiency soft edge beam, general illumination
OD - Opal Diffuser provides even, continuous line of light and general illumination

Driver Compatible with quality constant voltage drivers



Weight 2lbs per foot

Operating Temp Suitable for operation in maximum ambient temperature of 35C (95F)


Warranty 5-year Limited (see complete company warranty information)

Certifications ETL and ETL-C for dry and damp location, CE

Voltages 24V Fixture / 120-277VAC Driver (remote)

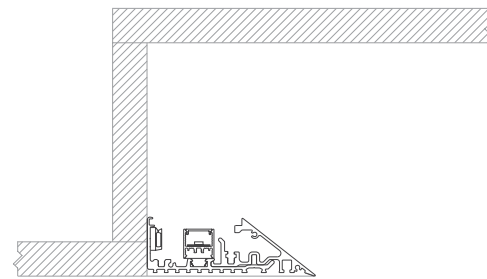

Gypsum Ceiling Mounting Options
4" minimum offset, 12" typical offset



Lenses/Accessories



Satin Diffuser (SD)
Opal Diffuser (OD)

20 Linear Mini Edgeless Cove

Model	Fixation	Pattern	Length	Power ³	CRI/CCT ⁴	Driver ⁵	Lens	Finish ⁶	Options
WG-20MEC	RPT	S ¹ PC ² PR ² PZ ²	A A x B A x B x C A x B x A x B	L M H	927 930 935 940 WD RGBW	X S D010 L3DAE L3DOE DFPN EL96 DMX	SD (std) OD	W (std) F	CDC EM

Model

- WG-20MEC = 20 Linear Mini Edgeless Cove

Fixation

- RPT = Recessed plaster trim

Pattern

- S = Straight run¹
- PC = Standard patterns coffer 2, 3 or 4 sided with 90° corners²
- PR = Standard patterns raft 2, 3 or 4 sided with 90° corners²
- PZ = Non-standard patterns and/or corners other than 90°; consult factory²

Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25")
For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)

Power³

- L = 3W/ft low power (WD 2.7 W/ft) (24V)
- M = 6W/ft mid power (WD 5.5 W/ft) (24V) (RGBW - 7.6 W/ft)
- H = 10W/ft high power (WD 8 W/ft) (24V)

CRI/CCT (90+ CRI)⁴

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- WD = Warm Dimming 1800 - 3000K
- RGBW = 3000K White (M power only)

Driver (remote)⁵

- X = No driver, ordered separately
- S = Standard, non-dim driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1%, 120VAC
- EL96 = Osram / EldoLED, 24V, 0.1% 0-10V Dimming
- DMX = Osram / EldoLED, 24V, 0.1% DMX Dimming

Lens

- SD = Satin clear diffuser (standard)
- OD = Satin opal diffuser

Finish⁶

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- F = Custom finish, specify RAL

Options

- CDC = Clear dust cover
- EM = Emergency (remote)

Whitegoods reserves the right to change any information without prior notice.

Notes

- Standard setup assumes the cove ends at a perpendicular wall and the LED board is setback from the end to minimize light on the perpendicular wall. Contact us for options.
- See pattern spec sheet.
- Wattage shown is for LED boards only, system wattage varies depending on driver selected.
- See spec page for delivered lumens.
- Remote power supply required. See power supply page for details.
- See Tiger Drylac color chart: inter-lux.com/tiger