

cod. E96755 (MASTER)



cod.E96756 (SATELLITE)



Finishes

-

Product Description

Rigid strip in FR4 with quick connector.
Cod. E96755: with head cable and connect for continuous line .
Cod. E96756: with in and out connector.
Push-fit connectors allow for up to 10 circuits, to be connected to the same power supply.
The article have adesive backing to be immediately stuck on any surface.

LED White :
4000K - 3000K

Color LED :

Optic :
00 (120° Data Sheet Led)

LED RGB :

Optic :
-

Applications

Indoor Spotlight

Power Led:

2835 CRI75

Resin: No

Cable type included: Yes, only master 1,18" 2X19AWG

Connector type: Female quick connector

Input (V - mA) : 24V DC

Nominal power (W): 7 WATT

Real power (W): Nominal Power

Life article: 50000 hr

Temperature on the surface of the glass:

Adjustability: No

Drive over: No

Glow Wire: 850°

Power supply: Remote

Insulation class: Class 2

IP 20

IK -



Weight: -

Volume: -

△ : OK

ETL : OK

Dimensions




Luminous flux

Lumen* LM80	
4000K	3000K
700	630

*Value of the luminous flux from the LED data sheet.

Installation

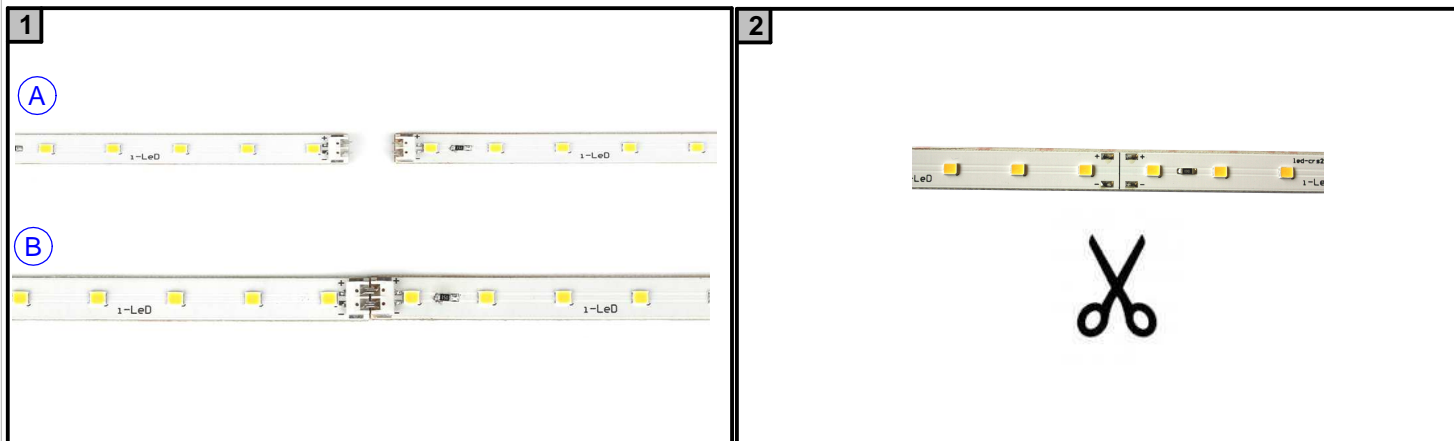

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED

READ ALL OF THESE INSTRUCTIONS BEFORE INSTALLING FIXTURES

- Keep all of the instructions for future reference
- Turn off power before installing fixture
- Installation is to be performed by a qualified electrician only
- All installations must conform to the National Electrical Code as well as all local jurisdictional codes and regulations
- Any modification of the luminaire will void any and all written or implied warranties
- The manufacture accepts no responsibility for damage to persons or property arising through improper use or installation


INSTALLATION SEQUENCE

- Mount remote driver in accessible well ventilated space
- Ensure power is off before connecting driver to line voltage
- Remove the protective film behind the strip and fix it on a smooth surface
- Cut the secondary cable from the master for remove the connector
- Connect secondary cable without the connector on the power supply
- For connect master and satellite join the connectors of strip
- The Inflex can be vutted where there is the junction, each 3,94" [2]*
- WARNING - Be sure secondary wiring is connected to driver BEFORE energizing to avoid LED failure
- Energize


*ATTENTION: when the strip is cut, it will be impossible to connect with the connectors

Accessories


Accessory (1)

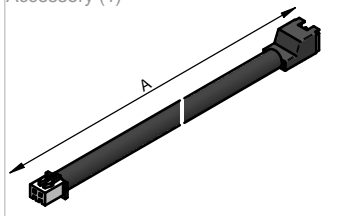


Accessory (2)

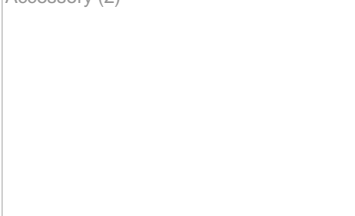

Accessory (3)

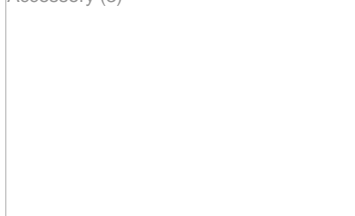

Accessory (4)

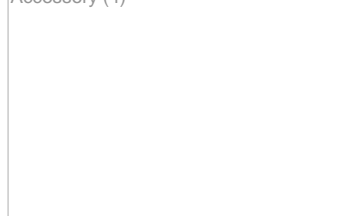

Accessory (1)

Extension cable with male/female quick connectors lenght A=39,37". Cod.E89123
Extension cable with male/female quick connectors lenght A=118,11". Cod.E89125

Accessory (2)

Accessory (3)