


ELLIPSE


Housing: Aluminum profile with integrated or L-shaped opal diffuser
Design: SATTLER

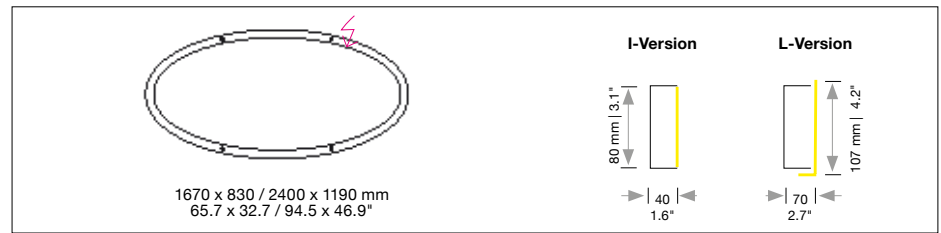


Sizes	Size: L x W x H mm	Inches	LED Watt	Lumen ¹	Weight kg / lbs ²	Item No.	LED Row 1	Dimming	LED Row 2	Finish	Power supply cable	Mounting version			
I-Version	1670 x 830 x 80	65.7 x 32.7 x 3.1	81	5422	17 / 37.5	873.	x x .	x x .	x x .	x x .	x x x .	x			
	2400 x 1190 x 80	94.5 x 46.9 x 3.1	116	7990	18 / 39.7	885.	x x .	x x .	x x .	x x .	x x x .	x			
L-Version	1670 x 830 x 107	65.7 x 32.7 x 4.2	81	5847	17 / 37.5	872.	x x .	x x .	x x .	x x .	x x x .	x			
	2400 x 1190 x 107	94.5 x 46.9 x 4.2	116	8615	18 / 39.7	884.	x x .	x x .	x x .	x x .	x x x .	x			
LED 24V CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours	<div><div>LED</div><div>RGB</div></div>	Standard:	Neutral-white	4000 K		x x x .	40.	x x .	x x .	x x .	x x x .	x			
		Optional:	Natural-white	3500 K	x x x .	35.	x x .	x x .	x x .	x x x .	x				
			Warm-white	3000 K	x x x .	30.	x x .	x x .	x x .	x x x .	x				
			Extra warm-white	2700 K	x x x .	27.	x x .	x x .	x x .	x x x .	x				
			Tunable white*	2700 - 6500 K	x x x .	80.	x x .	x x .	x x .	x x x .	x				
			RGB color control*		x x x .	60.	x x .	00.	x x .	x x x .	x				
			RGB + Neutral-White*	4000 K	x x x .	60.	x x .	40.	x x .	x x x .	x				
			*Only available with DMX. Combinations up to two rows of LED possible.												
		Dimming	<div><div></div></div>	Standard:	0 - 10 V		x x x .	x x .	51.	x x .	x x .	x x x .	x		
Optional:	Lutron EcoSystem**				x x x .	x x .	91.	x x .	x x .	x x x .	x				
	DMX				x x x .	x x .	31.	x x .	x x .	x x x .	x				
	First digit indicates Dimming protocol. Second digit indicates number of rows of LED. Codes shown with 1x row of LED (Standard). For 2x rows of LED replace the second digit accordingly. **Lutron EcoSystem driver must be ordered separately and remote mounted with mounting versions A, G, K, R.														
Finish	<div><div></div></div>	Standard:	12 white, powder coated, similar to RAL 9003	Optional (Powder coated):	10 black fine textured	11 white, similar to RAL 9010	30 anthracite fine textured	32* crocodile black	33 sand silver fine textured						
					34 bronze satined	35 gold	36 brass	37 bronze fine textured	38 copper						
					22 aluminum polished	27 brush-finished aluminum	*finish No. 32 crocodile black only suitable for L-Version		x x x .	x x .	x x .	x x .	-- .	x x x .	x
Power supply cable	<div><div></div></div>	Standard:	Z 70 silver	Optional:	Z 71 white	Z 73 black									
		Without power cable													
		000 Current-carrying F, R, T, K													

ELLIPSE


Housing: Aluminum profile with integrated or L-shaped opal diffuser
Design: SATTLER

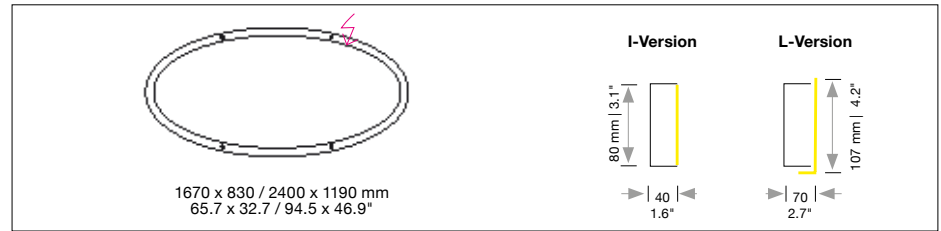


Mounting Version




4-point suspension with external power supply unit in suspended ceiling.




4-point suspension with external power supply unit in separate canopy.




Suspension through canopy.




4 current-carrying steel cables suspension through canopy. Only 1 strip LED possible. Not in combination with RGB.




Suspension with current-carrying steel cables and cavity wall box. Includes 1 ceiling fixation per suspension cable. Not in combination with RGB.




Suspension with pendant canopy PB 375 / PB 652 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1". Recommended ceiling height greater than 25 ft."




Suspension with pendant canopy PB 375 / PB 652 and current-carrying steel cables. (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1". Not in combination with RGB. Recommended ceiling height greater than 25 ft."



Direct ceiling mounting 50 mm / 1.9" with external power supply unit in suspended ceiling.



Direct ceiling mounting (white) 50 mm / 1.9" with external power supply unit in separate canopy.



Suspension point as clamping unit with 4 current-carrying cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	—

A, B, G, H, R = Distance of external power supply unit to light fixture max. 10m / 394"

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension 1670 x 830 => 550 mm / 21.6", 2399 x 1190 => 750 mm / 29.5"

Including steel cable suspension 5000 mm / 197" ; Version F, R, S, T 5000 / 3000 mm / 197"/118" and/or power supply cable 5000 mm / 197"

—	—	—	—	—	—	—
---	---	---	---	---	---	---

Complete order number

Power supply units: (1 LED rows)			
Type / Size mm / inch	L x W x H	Included with Mounting version	Protective rating
DE 1F	363 / 143 / 56 mm / 14.2 / 5.6 / 2.2"	A, G, R, K (1670 x 830 mm)	IP 20
DE 2F	363 / 283 / 56 mm / 14.2 / 11.1 / 2.2"	A, G (2400 x 1190 mm)	IP 20


Input voltage for all external power supply units and canopy is 120-277 VAC 50-60 Hz

Canopy: (1 LED row)			
Type / Size mm / inch	Ø cover plate / body / H	Included with Mounting version	Protective rating
DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F, H (1670 x 830 mm)	IP 20
DB 350	Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, E, F, H (2400 x 1190 mm)	IP 20
PB 375	Ø 90 H 375 mm / 3.5 x 14.8"	S, T (1670 x 830 mm)	IP 20
PB 652	Ø 90 H 375 mm / 3.5 x 14.8"	S, T (2400 x 1190 mm)	IP 20
DB 145	Ø 145 / 133 / 55 mm / 5.7 x 5.2 / 2.2"	K (1670 x 83 mm)	IP 20

Ø body 90 mm / 3.5"

Color: 12 white, similar RAL 9003, contact factory for other finishes
Canopy mounts to 4" octagonal junction box.

Optional



Ceiling fixation included with mounting versions A, G

Consisting of a cavity ceiling box with 80 mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, G.

200. 00. 00. 00. 12 (white)