





20 Linear Perimeter Regressed Narrow Lens

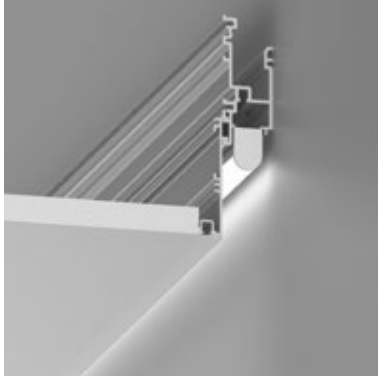


Trimless (P)



Bezel Trim (BT)



Return Trim (RT)



T-Grid (TG)

Ordering Information

Model	Type ¹	Length	LED ²	Color ³	Voltage	Power ⁴	Diffuser	Mount	Finish	Options
WG-20LPR	S P	A A x B A x B x C A x B x A x B	L M	80+ CRI 827 830 835 840 90+ CRI 927 930 935 940	UNV 120V	X S D010 L3DAE L3DOE DFPN	LNL	P BT RT TG	W (std) C	DL BEC FEC PEC

Luminaire

- Continuous, Narrow Lens regressed to the ceiling plane.
- Field replaceable LED boards.
- 80+ CRI, 3 steps MacAdam.
- Lengths and angles factory cut to exact field dimensions specified to .25".
- Standard and custom corners.
- Supplied with 4' class 2 plenum rated feed cable per fixture lengths.

Type¹

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane

Length

- A, B, C = specify feet & inches to the nearest .25" (i.e. 6' 5.5") For patterns specify each length (i.e. 2 sided: A x B = 6' 5" x 6'; 3 sided: A x B x C; 4 sided: A x B x A x B)

LED²

- L = 3.2W/ft Low Power (24V)
- M = 6.4W/ft Mid Power (24V)

Color / Lumens³

- 80+ CRI minimum (Low/Mid)
- 827 = 2700K, (431/729lm/ft)
- 830 = 3000K, (468/790lm/ft)
- 835 = 3500K, (468/790lm/ft)
- 840 = 4000K, (485/820lm/ft)
- For 90+ CRI specify 927, 930, etc. Approximately 16% less lumens than 80 CRI.

Voltage

- UNV = 120-277V
- 120V = 120V (DFPN only)

Power Supply (remote)⁴

- X = No driver, ordered separately
- S = Standard driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1% 120VAC

Diffuser

- LNL = Narrow Lens

Mounting

- P = Trimless
- BT = Bezel Trim
- RT = Return Trim
- TG = T-Grid

Finish

- W = White finished trim, RAL9010 (standard)
- C = Custom finished trim, specify RAL

Options

- DL = Damp Location
- BEC = Bezel End Caps
- FEC = Flat End Caps
- PEC = Plaster-in End Caps
- To specify multiple options, select the appropriate grouped codes from the dropdown e.g. DL-BEC.

Emergency

- Emergency LED driver available, order separately.

¹ See pattern spec sheet.

² Wattage shown does not include power supplies/drivers.

³ Source lumens shown.

⁴ Remote power supply required. See power supply page for details.