


ELLIPSE

Housing: Aluminum profile, integrated (I) or L-shaped acrylic cover (L)
 Design: SATTLER

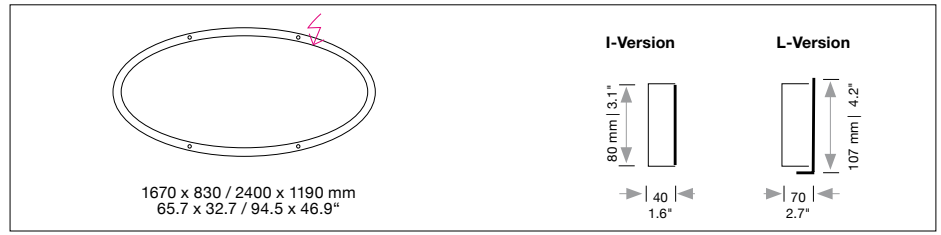


Sizes	Size: L x W x H mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
I-Version	1670 x 830 x 80	65.7 x 32.7 x 3.1	62	4,990	17 / 37.5	873.	X X X.	X X.	X X.	X X.	X X X.	X
	2400 x 1190 x 80	94.5 x 46.9 x 3.1	88	7,358	18 / 39.7	885.	X X.	X X.	X X.	X X.	X X X.	X
L-Version	1670 x 830 x 107	65.7 x 32.7 x 4.2	62	5,383	17 / 37.5	872.	X X.	X X.	X X.	X X.	X X X.	X
	2400 x 1190 x 107	94.5 x 46.9 x 4.2	89	7,939	18 / 39.7	884.	X X.	X X.	X X.	X X.	X X X.	X
LED 24V CRI > 80		Neutral-white Cold-white Warm-white Extra warm-white Extra warm-white Tunable white* RGB color control* RGB + Neutral-White*	4000 K 5000 K 3000 K 2700 K 2200 K 2700 - 6500 K 4000 K 4000 K	(Standard) (Optional) (Optional) (Optional) (Optional) (Optional) (Optional) (Optional)	X X X. X X X. X X X. X X X. X X X. X X X. X X X. X X X.	40. 50. 30. 27. 22. 65. 60. 60.	X X. X X. X X. X X. X X. X X. X X. X X.	X X. X X. X X. X X. X X. X X. X X. X X.	X X. X X. X X. X X. X X. X X. X X. X X.	X X X. X X X. X X X. X X X. X X X. X X X. X X X. X X X.	X X X X X X X X	
Dimming		Dimmable 0 - 10 V DMX (RGB possible) LUTRON (contact factory)	(Standard) (Optional) (Optional)	X X X. X X X. X X X.	X X. X X. X X.	51. 31. 71.	00. 00. 00.	X X. X X. X X.	X X. X X. X X.	X X X. X X X. X X X.	X X X	
Finishes	 11 white (Optional)	 22 aluminum polished 30 anthracite 27 brush-finished aluminum 32 crocodile black 33 sand silver fine textured 35 gold 36 brass 37 bronze fine textured 38 copper 10 black fine textured 40 brass patinated 42 bronze patinated 44 wood veneer, white borders XX Custom finish	X X X. X X. X X. X X.	X X. X X. X X. X X.	X X. X X. X X. X X.	X X. X X. X X. X X.	X X X. X X X. X X X. X X X.	X X X X				
Power Supply Cable	 Z 70 Silver (Optional)	 Z 71 white Z 72 grey Z 73 black Z 74 orange Z 75 red Z 76 green	X X X. X X. X X. X X.	X X. X X. X X. X X.	X X. X X. X X. X X.	X X X. X X X. X X X. X X X.	X X X X					

1) Net lumen output: Losses due to diffusers and reflectors are considered.
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
2) Weight of lights without remote technical unit or canopy.

ELLIPSE

Housing: Aluminum profile, integrated (I) or L-shaped acrylic cover (L)
 Design: SATTLER

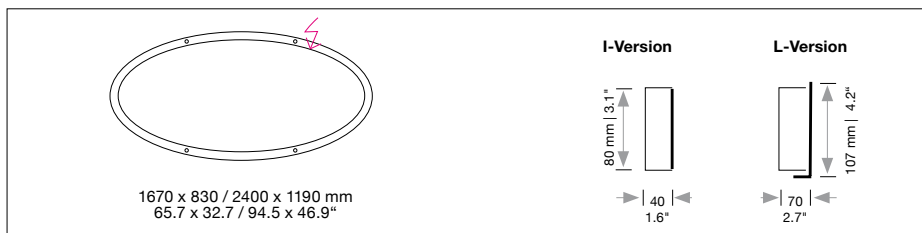

Mounting Version

 4-point suspension with external power supply unit in suspended ceiling	 4-point suspension with external power supply unit in separate canopy	 suspension through canopy	 4 current-carrying steel cables. Only 1 strip LED possible. Not in combination with RGB	 Max. 1670 x 830 Suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"	 Max. 1670 x 830 Suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB
 Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling	 Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy	 Suspension point as clamping unit with 4 current-carrying cables and remote technical unit in suspended ceiling.			

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, G, H = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height 1670 x 830 => 550mm / 21.6"
 2399 x 1190 => 750mm / 29.5"

Including steel cable suspension 5000mm / 197" ; Version F, R, S, T 5000 / 3000mm / 197"/118" and/or power supply cable 5000mm / 197"


X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Dimensions of external power supply units (1 LED Stripe)

Typ	Size mm / inch	For use with Mounting Version
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, G, K

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**




Dimensions of canopy (1 LED Stripe)

Typ	Size mm / inch	For use with Mounting Version
DB 290	Ø 290 / 260 mm / 11.4 x 10.2" size 1670 x 830 mm	B, E, F, H
DB 350	Ø 350 / 320 mm / 13.7 x 12.5" size 2400 x 1190 mm	B, E, F, H
PB 366	Ø 90 H 366 mm / 13.7 x 12.5"	S, T

Canopy finish: white (11) contact factory for other finishes
 USA/Canada: Canopy mounts to 4" octagonal junction box.

Optional



Ceiling fixation for mounting version A

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.

