
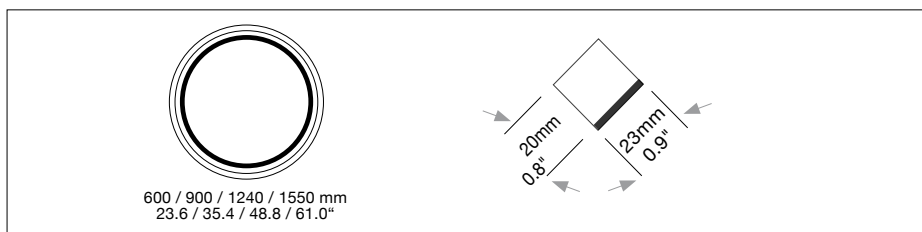


GIRATA

Vertical

Housing: Circular aluminum profile with integrated acrylic
Design: MARKUS BISCHOF

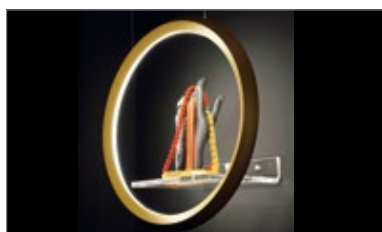


Sizes	Size: Ø mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version	
	Ø 600 mm	23.6"	33	1,530	3.0 / 6.6	901.	X X.	X X.	X X.	X X.	X X X.	X	
	Ø 900 mm	35.4"	55	2,486	3.5 / 7.7	902.	X X.	X X.	X X.	X X.	X X X.	X	
	Ø 1240 mm	48.8"	72	3,314	5.0 / 11.0	903.	X X.	X X.	X X.	X X.	X X X.	X	
	Ø 1550 mm	61.0"	88	4,060	5.5 / 12.1	904.	X X.	X X.	X X.	X X.	X X X.	X	
LED 24V CRI > 90 *CRI > 80			Warm-white	3000 K	(Standard)	X X X.	30.	X X.	X X.	X X.	X X X.	X	
			Neutral-white	4000 K	(Optional)	X X X.	40.	X X.	X X.	X X.	X X X.	X	
			Extra warm-white	2700 K	(Optional)	X X X.	27.	X X.	X X.	X X.	X X X.	X	
			Extra warm-white	2200 K*	(Optional)	X X X.	22.	X X.	X X.	X X.	X X X.	X	
Dimming			Dimmable 0 - 10 V		(Standard)	X X X.	X X.	51.	00.	X X.	X X X.	X	
			DMX (RGB possible)		(Optional)	X X X.	X X.	31.	00.	X X.	X X X.	X	
			LUTRON (contact factory)		(Optional)	X X X.	X X.	71.	00.	X X.	X X X.	X	
Finishes		11 white		22 aluminum polished		27 brush-finished aluminum		30 anthracite		32 crocodile black		33 sand silver fine textured	
(Standard)		(Optional)		35 gold		36 brass		37 bronze fine textured		38 copper		10 black fine textured	
				XX Custom finish									
							X X X.	X X.	X X.	X X.	X X X.	X	
Power Supply Cable		Z 70 Silver		Z 71 white		Z 72 grey		Z 73 black					
(Standard)		(Optional)		Z 74 orange		Z 75 red		Z 76 green					
When using current carrying steel cables in Mounting Versions F, R leave this section blank													
							X X X.	X X.	X X.	X X.	X X X.	X	


1) Net lumen output: Losses due to diffusers and reflectors are considered.
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
2) Weight of lights without remote technical unit or canopy.

GIRATA Vertical


Housing: Circular aluminum profile with integrated acrylic
Design: MARKUS BISCHOF

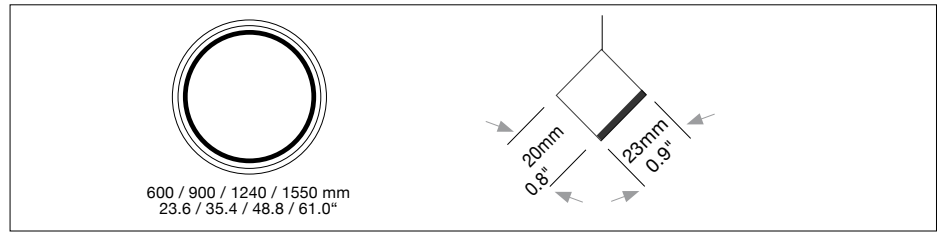


Mounting Version




2 point suspension, with external power supply unit in suspended ceiling



Suspension through canopy



Current-carrying steel cables.



Suspension with current-carrying steel cables and cavity wall box.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
x x x.	x x.	x x.	x x.	x x.	x x x	.

A, R = Distance of external power supply unit to light fixture max. 10m / 394".

Including steel cable suspension 3000mm / 118"
or/and power supply cable 3000mm / 118"




x x x.	x x.	x x.	x x.	x x.	x x x	x
--------	------	------	------	------	-------	---

Complete order number

Dimensions of external power supply units

Typ	Size mm / inch L W H	For use with Mounting Version
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, R

Input voltage for all external power supply units and canopy is




Dimensions of canopy

Typ	Size mm / inch body /H	For use with Mounting Version
DBL 390	up to Ø 1240 mm L 390 x B 70 x H 70 mm L 15.3 x B 2.7 x H 2.7"	F / E
DBL 490	up to Ø 1550mm L 490 x B 70 x H 70 mm L 19.4 x B 2.7 x H 2.7"	F / E

Canopy finish: white (11)
contact factory for other finishes

USA/Canada: Canopy mounts to 4" single junction box.

Optional



Ceiling mounting version A

200. 00. 00. 00. 11 (white)
Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.