# 4" ProTools DLX Adjustable Square Recessed Cone - Narrow

### Full Featured With Accessory Holder And Ceiling Void Light Leak Hood

- 4" square downlight with 2" light aperture.
- Regressed aperture / lens position provides good glare control.
- 8 degree very narrow beam..
- Open aperture, clear lens or optical accessory lenses.
- No light leak or view into ceiling void from below due to a unique light leak hood.
- maintained from below the ceiling. ■ Mounts in 1/16" to 1" surface.
- Modular interchangeability throughout the entire ProTools range of products.
- Tilt 45°, rotation 365°, 144 step.
- Wet Location option as standard (WL).


Million .	
H	



#### Recessed Plaster Trim

Housing	Die-caste aluminum for precision fit and heat dissipation
	Mounting hardware for all ceiling types; trim and trimless
	EZ clip mounting for secure installation
	Snap-in cover
	Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Square recessed cone - low brightness, general illumination
LED	90+ CRI
	Low/Mid/High/Extra High output choices
	2700K, 3000K, 3500K, 4000K
Beam	8 degree beam spread (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications
	Through-wire integral driver enclosure installed from below without the need for
	bulky housing
	POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum
	Optional: new construction (with j-box and driver attached)
	Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5 year Limited (can complete company warranty information)
warranty	5-year Limited (see complete company warranty information)

Certifications ETL and ETL-C for dry and damp location, CE, Wet Location rated

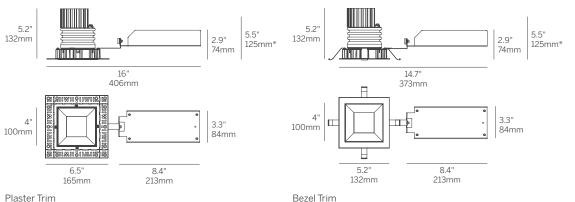

Plaster Trim

- XH = Extra High Power, 13W @ 1050mA

#### CRI/CCT<sup>3</sup>

- 930 = 3000K, (380/510/670/910 lm)
- 935 = 3500K, (380/510/670/910 lm)
- 940 = 4000K, (410/560/730/980 lm)

#### Driver<sup>4</sup>

- X = Remote driver, ordered separately
- S = Standard non-dim driver. 120-277V
- D010 = EldoLED, 1%, 0-10V Driver, 120-277V
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, SoftOn/FadeToBlack, 120-277V

## 4" ProTools DLX Adjustable

Square Recessed Cone - Narrow

Model	Fixation	Power <sup>1,2</sup>	CRI/ CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	<b>Finish</b> ⁵	Options
WG-100SPTDLX	RPT RBT	L M H XH	927 930 935 940	X S D010 PEQ0	SRC	OA MPL RSC	8 (Narrow)	W S <sup>6</sup>	LP CP IC WL

Cover

Lens

Beam

Finish

Options

### Model

■ WG-100SPTDLX = 4" ProTools DLX Adjustable

### Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

### Power<sup>1,2</sup>

- L = Low Power, 4W @ 350mA
- M = Mid Power, 5.8W @ 500mA
- H = High Power, 8.4W @ 700mA

- 90+ CRI (Low/Mid/High/Extra High)
- 927 = 2700K, (360/480/630/850 lm)

- $\blacksquare IC = IC/NC Housing$

## Optical Accessory Holder

### ■ HX = Hex Louver

- FG = Frosted Glass
- SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

#### Notes

- 1 Other lumen packages available, consult factory.
- 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%
- 3 Source lumens shown.
- 4 See power supply page for details.
- 5 See Tiger Drylac color chart: inter-lux.com/tiger
- 6 Plaster trim version includes white frame and gray cover.

Recessed Bezel Trim

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.

> technical informatior





■ SRC = Square Recessed Cone

- OA = Open Aperture
- MPL = Micro-prismatic Lens
- RSC = Satin Clear

■ 8 = 8° Beam Angle (Narrow) (TIR Optic)

■ W = White, 15% gloss, Tiger Drylac 49/11350 (standard) ■ S = Silver, 15% gloss, Tiger Drylac49/90500<sup>6</sup>

ProTools downlights require no additional options kits for remodel & new construction

- LP = Landing Pan (specify for Acoustic Ceiling Tile
- installation) ■ CP = Chicago Plenum Housing
- WL = Wet Location (not available with open aperture)

### **Optical Accessory Holder**

- Up to 3 lenses and/or accessories can be added to the
- LS = Linear Spread Lens