


## SLIM DIRECT

Housing: Circular Aluminum profile with integrated opal diffuser  
 Design: SATTLER

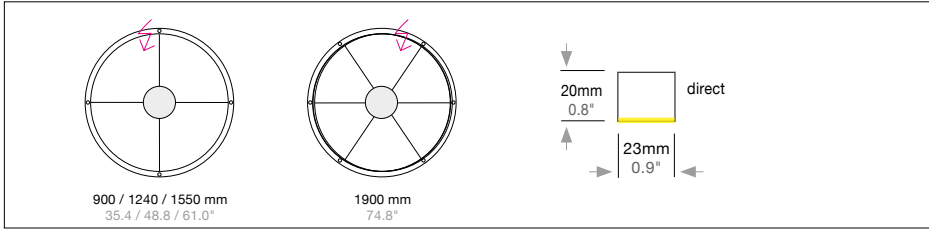

Sizes	Size: Ø mm	Inches	LED Watt	Lumen <sup>1</sup>	Weight kg/lbs <sup>2</sup>	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
	Ø 380 mm	15.0"	21	1269	2.5 / 5.5	<b>709.</b>	X X.	X X.	X X.	X X.	X X X.	X
	Ø 600 mm	23.6"	31	2192	3.0 / 6.6	<b>710.</b>	X X.	X X.	X X.	X X.	X X X.	X
	Ø 900 mm	35.4"	51	3196	3.5 / 7.7	<b>711.</b>	X X.	X X.	X X.	X X.	X X X.	X
	Ø 1240 mm	48.8"	66	4053	5.0 / 11.0	<b>712.</b>	X X.	X X.	X X.	X X.	X X X.	X
	Ø 1550 mm	61.0"	85	5208	5.5 / 12.1	<b>713.</b>	X X.	X X.	X X.	X X.	X X X.	X
	Ø 1900 mm	74.8"	102	6337	6.0 / 13.2	<b>714.</b>	X X.	X X.	X X.	X X.	X X X.	X

LED	Standard:	Warm-white	3000 K	X X X.	30.	X X.	X X.	X X.	X X X.	X
24V	Optional:	Natural-white	3500 K	X X X.	35.	X X.	X X.	X X.	X X X.	X
CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		Neutral-white	4000 K	X X X.	40.	X X.	X X.	X X.	X X X.	X
		Extra warm-white	2700 K	X X X.	27.	X X.	X X.	X X.	X X X.	X
		Tunable white*	2700 - 6500 K	X X X.	80.	X X.	X X.	X X.	X X X.	X
		RGB Color control*		X X X.	60.	X X.	00.	X X.	X X X.	X

Dimming	Standard:	0 - 10 V	X X X.	X X.	51.	00.	X X.	X X X.	X
	Optional:	Lutron EcoSystem <sup>A,G,R,K</sup> DMX	X X X.	X X.	61.	00.	X X.	X X X.	X
			X X X.	X X.	31.	00.	X X.	X X X.	X

Finish	Standard:	12	white, powder coated, similar to RAL 9003	Optional (Powder coated):	10	black fine textured	11	white, similar to RAL 9010	30	anthracite fine textured	33	sand silver fine textured	34	bronze satined							
					35	gold	36	brass	37	bronze fine textured	38	copper									
				Optional (Premium):	22	aluminum polished	27	brush-finished aluminum	66*	bronze anodized brushed	65*	champ. gold anodized brushed			X X X.	X X.	X X.	X X.		X X X.	X

Power supply cable	Standard:	Z 70	silver	Optional:	Z 71	white	Z 73	black												

7.2024 SLIM DIRECT




410 381 1497 inter-lux.com answers@inter-lux.com  
 inter-lux reserves the right to make technical changes without notice

IP 50 Light distribution direct Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08


Technical data is subject to change. Errors and omissions excepted 1. Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. 2. Weight of lights without remote technical unit or canopy.

## SLIM DIRECT


Housing: Circular Aluminum profile with integrated opal diffuser  
 Design: SATTLER

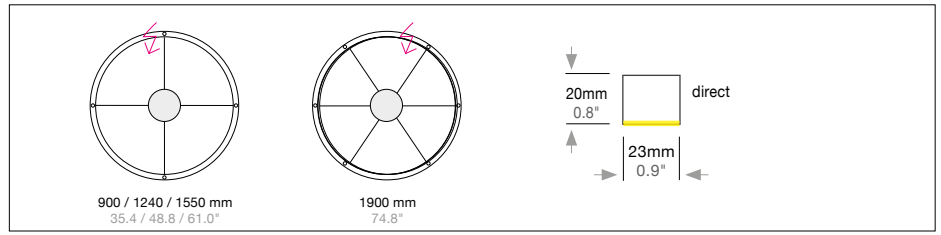


### Mounting version




up to Ø 1550 mm / 61.0"  
 4-point suspension  
 Ø 1900 mm / 74.8"  
 6-point suspension with external power supply unit in suspended ceiling.




up to Ø 1550 mm / 61.0"  
 4-point suspension  
 Ø 1900 mm / 74.8"  
 6-point suspension with external power supply unit in separate canopy.




Suspension through canopy.




4/6 current-carrying steel cables. Not in combination with RGB.




Suspension with current-carrying steel cables and cavity wall box. Not in combination with RGB.




Suspension with pendant canopy PB 375 / PB 656 and steel cables  
 (a) 5000 mm / 196.8" +  
 (b) 3000 mm / 118.1"  
 25' ceiling height



Suspension with pendant canopy PB 375 / PB 656 and current-carrying steel cables.  
 (a) 5000 mm / 196.8" +  
 (b) 3000 mm / 118.1"  
 Not in combination with RGB.  
 25' ceiling height recommended.



Direct ceiling mounting  
 50mm / 1.9" with external power supply unit in suspended ceiling



Suspension point as clamping unit with 4/6 cables and remote technical unit in suspended ceiling. Not in combination with RGB.

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

---	---	---	---	---	---	-
-----	-----	-----	-----	-----	-----	---

Complete order number

A, B, G, R, K = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 3000mm/118" and/or power supply cable 3000mm/118" version S,T 5000 + 3000mm / 197"+118"


Power supply unit:		Type / Size mm / inch L x W x H	Included with Mounting version	Protective rating
	DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A,G,R,K (up to Ø 1550 mm)	IP 20
	DE 2F	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"	A,G,R,K (up to Ø 1900 mm)	IP 20

Input voltage for all external power supply units and canopy is 120-277 VAC 50-60 Hz

Canopy:		Type / Size mm / inch Ø cover plate / body / H	Included with Mounting version	Protective rating
	DB 230	Ø 230 / 210 / 60 mm / 9.5 / 8.3 / 2.3"	B, E, F (up to Ø 900 mm)	IP 20
	DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F (up to Ø 1550 mm)	IP 20
	DB 350	Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, E, F (up to Ø 1900 mm)	IP 20
	PB 375	Ø 90 H 375 mm / 3.5 x 14.8"	S, T (up to Ø 1550 mm)	IP 20
	PB 656	Ø 90 H 656 mm / 3.5 x 25.8"	S, T (up to Ø 1900 mm)	IP 20
	DB 145	Ø 145 / 133 / 55 mm / 5.7 x 5.2 / 2.2"	K	IP 20

Color: 12 white, similar RAL 9003,  
 contact factory for other finishes  
 Canopy mounts to 4" octagonal junction box.

### Optional



Power cable cover plate for mounting version A, G

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover. Included with mounting version A, G.

