


ANGOLO

Housing: Aluminum housing, powder coated. Pendant light with steel cable suspension, canopy and red power supply cable.

Design: MICHAEL SCHMIDT

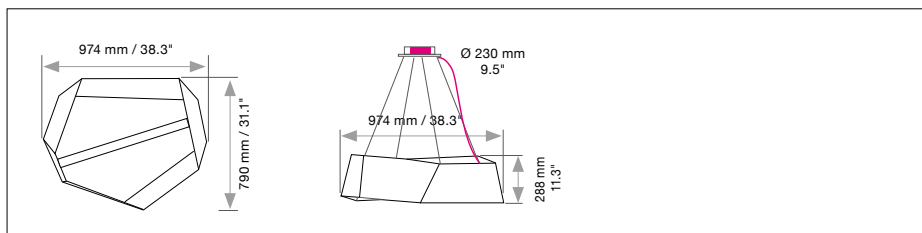

| Size: L x W x H mm | inches | LED Watt | Lumen ¹⁾ | weight kg ²⁾ / lbs ²⁾ | Item No. | LED | Dimming | LED | Finishes | Power Supply cable | Mounting Version | |
|---------------------------|----------------------------|---------------------------------|---------------------|---|-------------|------------|------------|------------|----------|--------------------|------------------|---|
| 974 x 790 x 288 mm | 38.3 x 31.1 x 11.3" | 14+10 | 867+246 | 14 / 30.8 | 700. | x x . | x x . | x x . | x x . | x x x . | x | |
| LED 24V | | Neutral-white | 4000 K | (Standard) | x x x . | 40. | x x . | x x . | x x . | x x x . | x | |
| | | Cold-white | 5000 K | (Optional) | x x x . | 50. | x x . | x x . | x x . | x x x . | x | |
| | | Warm-white | 3000 K | (Optional) | x x x . | 30. | x x . | x x . | x x . | x x x . | x | |
| | | Extra warm-white | 2700 K | (Optional) | x x x . | 27. | x x . | x x . | x x . | x x x . | x | |
| | | Extra warm-white | 2200 K* | (Optional) | x x x . | 22. | x x . | x x . | x x . | x x x . | x | |
| Dimming | | Dimmable 0 - 10 V | | (Standard) | x x x . | x x . | 51. | 00. | x x . | x x x . | x | |
| | | DMX | | (Optional) | x x x . | x x . | 31. | 00. | x x . | x x x . | x | |
| | | LUTRON (contact factory) | | (Optional) | x x x . | x x . | 71. | 00. | x x . | x x x . | x | |
| Finishes | | 11 white | | 10 black fine textured | (Optional) | x x x . | x x . | x x . | x x . | .. | x x x . | x |
| Power Supply Cable | | Z 75 red | | Z 70 Silver | (Optional) | | | | | | | |
| | | | | Z 71 white | | | | | | | | |
| | | | | Z 72 grey | | | | | | | | |
| | | | | Z 73 black | | x x x . | x x . | x x . | x x . | x x . | ... | x |
| | | | | Z 74 orange | | | | | | | | |
| | | | | Z 76 green | | | | | | | | |
| Mounting Version | | 4-point suspension | | (Standard) | x x x . | x x . | x x . | x x . | x x . | x x x . | E | |

Including steel cable suspension 5000mm / 197" and power supply cable 5000mm / 197"

Dimensions of canopy

| Typ | Size mm / inch cover plate / body / H | For use with Mounting Version |
|---------------|--|-------------------------------|
| DB 230 | Ø 230 / 210 / 60 mm / 9.5 / 8,3 / 2.3" | E |

Canopy finish: white (11) contact factory for other finishes

USA/Canada: Canopy mounts to 4" octagonal junction box.

| | | | | | | |
|---------|-------|-------|-------|-------|---------|----------|
| x x x . | x x . | x x . | x x . | x x . | x x x . | E |
|---------|-------|-------|-------|-------|---------|----------|

Complete order number

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**