

20 Mini Edgeless Cove



Ordering Information									
Model	Fixation	Pattern	Length	Power ¹	CRI/ CCT ²	Driver ³	Lens	Finish	Options
WG-20MEC	RPT	S ¹ PC ² PR ² PZ ²	A A x B A x B x C A x B x A x B	L M H	927 930 935 940	X S D010 L3DAE L3DOE DFPN	SD (std)	W (std) F	CDC

QUICKSHIP HOUSINGS AVAILABLE

Luminaire

- Continuous, evenly illuminated snap-in lens without visible LED pattern.
- Continuous mounting to any desired length (within 1/4").
- Satin Diffuser (standard) for maximum efficiency and spot free lens.
- Lengths and angles factory cut to exact field dimensions.
- Standard and custom corners.
- Field replaceable LED boards.

Fixation

- RPT = Recessed plaster trim

Pattern

- S = Straight run¹
- PC = Standard patterns coffer 2, 3 or 4 sided with 90° corners²
- PR = Standard patterns raft 2, 3 or 4 sided with 90° corners²
- PZ = Non-standard patterns and/or corners other than 90°, consult factory²

Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25") For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)

Power³

- L = 3W/ft low power (24V)
- M = 6W/ft medium power (24V)
- H = 10W/ft high power (24V)

Color/Lumens⁴

- 90+ CRI minimum (Low/Mid/High)
- 927 = 2700K, (237/475/831 lm/ft)
 - 930 = 3000K, (258/516/903 lm/ft)
 - 935 = 3500K, (306/613/1073 lm/ft)
 - 940 = 4000K, (364/728/1275 lm/ft)

Driver (remote)⁵

- X = No driver, ordered separately
- S = Standard driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1%, 120VAC

Lens

- SD = Satin clear diffuser (standard)

Finish

- W = White, 15% gloss, RAL9010 (standard)
- F = Custom finish, specify RAL



Options

- CDC = Clear dust cover

Emergency (remote only)

- Emergency LED battery backup available, order separately.

- Standard setup assumes the cove ends at a perpendicular wall and the LED board is setback from the end to minimize light on the perpendicular wall. Contact us for options.
- See pattern specs sheet.
- Wattage shown does not include power supplies/drivers.
- Delivered lumens with satin clear diffuser shown.
- Remote drivers required. See power supply page for details.

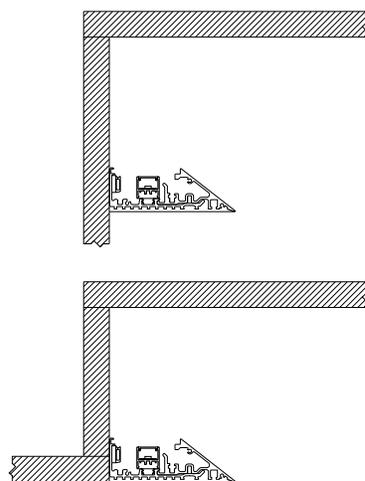

Gypsum Ceiling Mounting Options.
4" minimum offset, 12" typical offset.
Can be installed in Cove or Coffin.