


CIRCOLO

I-Version

Housing: Circular aluminum profile, opal acrylic diffuser on the inside
 Design: SATTLER, Patented

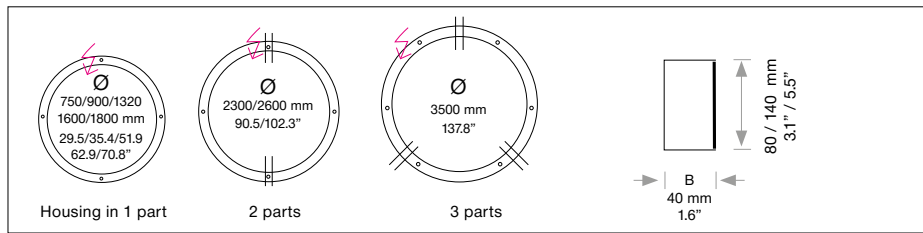

Size: L x W x H mm	inches	LED Watt	Lumen ¹	weight ² kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Total height	Mounting Version
Ø 750	29.5"	48	3,629	8 17.6	252	x x .	x x .	x x .	x x .	x x x .	x x .	x
Ø 900	35.5"	58	4,388	10 22.0	253	x x .	x x .	x x .	x x .	x x x .	x x .	x
Ø 1320	51.9"	84	6,523	20 44.0	254	x x .	x x .	x x .	x x .	x x x .	x x .	x
Ø 1600	62.9"	102	7,991	25 55.1	255	x x .	x x .	x x .	x x .	x x x .	x x .	x
Ø 1800	70.8"	114	9,027	30 66.0	256	x x .	x x .	x x .	x x .	x x x .	x x .	x
Ø 2300	90.5"	144	11,650	35 77.2	257	x x .	x x .	x x .	x x .	x x x .	x x .	x
Ø 2600	102.3"	164	13,272	40 88.0	258	x x .	x x .	x x .	x x .	x x x .	x x .	x
Ø 3500	137.8"	220	19,504	53 117.0	259	x x .	x x .	x x .	x x .	x x x .	x x .	x

LED	Standard	Optional:	Neutral-white	4000 K	x x x .	40.	x x .	x x .	x x .	x x x .	x x x .	x
24V			Cold-white	5000 K	x x x .	50.	x x .	x x .	x x .	x x x .	x x x .	x
			Warm-white	3000 K	x x x .	30.	x x .	x x .	x x .	x x x .	x x x .	x
			Extra warm-white	2700 K	x x x .	27.	x x .	x x .	x x .	x x x .	x x x .	x
CRI > 80			Ultra warm-white	2200 K	x x x .	22.	x x .	x x .	x x .	x x x .	x x x .	x
			Tunable white*	2700 - 6500 K	x x x .	65.	x x .	x x .	x x .	x x x .	x x x .	x
			RGB*		x x x .	60.	x x .	00.	x x .	x x x .	x x x .	x

*(available with DMX or Casambi dimming only)

Dimming	Standard	Optional:	0 - 10 V	x x x .	x x .	51.	00.	x x .	x x x .	x x x .	x
			DMX	x x x .	x x .	31.	00.	x x .	x x x .	x x x .	x
			LUTRON 3-wire / EcoSystem (contact factory)**	x x x .	x x .	71.	00.	x x .	x x x .	x x x .	x
			CASAMBI	x x x .	x x .	81.	00.	x x .	x x x .	x x x .	x

First digit indicates dimming protocol. Second digit indicates number of rows of LED.
 Codes shown with 1x row of LED (Standard). For 2x rows of LED replace the second digit accordingly.
 **(available with mounting versions A, C & G only. Consult factory for driver quantity and dimensions)

LED	Standard	Optional:	No second row of LED	x x x .	x x .	x x .	00.	x x .	x x x .	x x x .	x
24V			Neutral-white	x x x .	x x .	x x .	40.	x x .	x x x .	x x x .	x
			Cold-white	x x x .	x x .	x x .	50.	x x .	x x x .	x x x .	x
			Warm-white	x x x .	x x .	x x .	30.	x x .	x x x .	x x x .	x
			Extra warm-white	x x x .	x x .	x x .	27.	x x .	x x x .	x x x .	x
CRI > 80			Ultra warm-white	x x x .	x x .	x x .	22.	x x .	x x x .	x x x .	x
			Tunable white*	x x x .	x x .	x x .	65.	x x .	x x x .	x x x .	x
			RGB*	x x x .	x x .	x x .	00.	x x .	x x x .	x x x .	x

Combinations up to 2 rows of LED possible.
 Select appropriate dimming code and change the second digit to a 2 for 2 rows of LED
 Example, for 0-10V and 2x rows of 4000K: 238.40.52.40.11.Z70.170.A.
 Consult factory for wattage and lumens as well as enclosure/canopy dimensions.
 For fixtures with White + RGB with dimming code 32, the white LED is controlled as 0-10V, the RGB as DMX




Complete order number









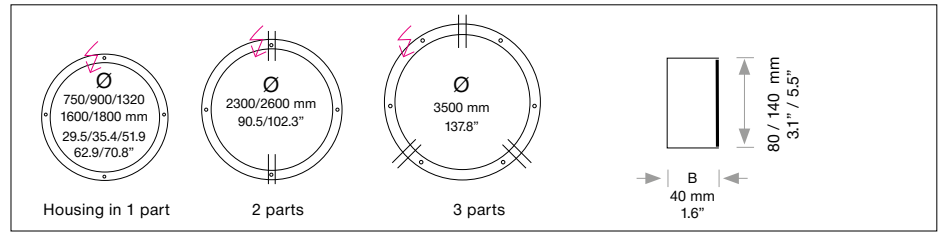













CIRCOLO

I-Version

Housing: Circular aluminum profile, opal acrylic diffuser on the inside
 Design: SATTLER, Patented



	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Total height	Mounting Version
Finishes Standard  11 white RAL 9010 Optional (Powder coated)  10 black fine textured  30 anthracite  32 crocodile black  33 sand silver fine textured  34 bronze satined  35 gold  36 brass  37 bronze fine textured  38 copper Optional (Premium)  22 aluminum polished  27 brush-finished aluminium Consult factory for custom finishes								
Power Supply Cable Standard  Z 70 Silver Standard (for mounting versions F, K, R, T): Separate power cable not required  Z 74 orange  Z 75 red  Z 76 green Optional  Z 71 white  Z 72 grey  Z 73 black								
Total Height  80 / 140 mm 3.1" / 5.5" 80mm (3.1") 140mm (5.5") For the H 140mm(5.5") a second row of LEDs is recommend The 140mm(5.5") profile is only available for the 1320mm-3500mm(51.9"-137.8")Ø rings								

--	--	--	--	--	--	--	--	--

Complete order number

