


CIRCOLO INVERSE


Housing: *PYSHY HS\TPU\T WYVÄSL VWHS HJY`SPJ JV]LY VU [OL VV
+LZPNUI! :(;;3,9

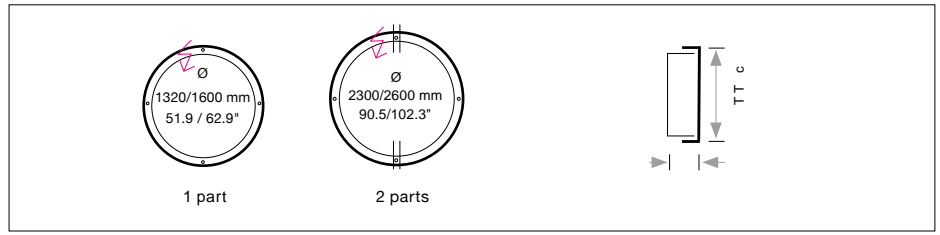


Size: L x W x H mm	inches	LED Watt	Lumen ¹⁾	weight kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
Sizes	Ø 1320 x 160 x 70	51.9 x 6.3 x 2.7			265.	XX.	XX.	XX.	XX.	XXX.	X
	Ø 1600 x 160 x 70	62.9 x 6.3 x 2.7			266.	XX.	XX.	XX.	XX.	XXX.	X
	Ø 2300 x 160 x 70	90.5 x 6.3 x 2.7			267.	XX.	XX.	XX.	XX.	XXX.	X
	Ø 2600 x 160 x 70	102.3 x 6.3 x 2.7			268.	XX.	XX.	XX.	XX.	XXX.	X
LED = * 90 %		Neutral-white	4000 K	(Standard)	XXX.	.	XX.	XX.	XX.	XXX.	X
		Cold-white	5000 K	(Optional)	XXX.	.	XX.	XX.	XX.	XXX.	X
		Warm-white	3000 K	(Optional)	XXX.	3.	XX.	XX.	XX.	XXX.	X
		Extra warm-white	2700 K	(Optional)	XXX.	.	XX.	XX.	XX.	XXX.	X
		Extra warm-white	2200 K	(Optional)	XXX.	22.	XX.	XX.	XX.	XXX.	X
		Tunable white*	2700 - 6500 K	(Optional)	XXX.	65.	XX.	XX.	XX.	XXX.	X
		RGB color control*		(Optional)	XXX.	60.	XX.	00.	XX.	XXX.	X
		RGB + Neutral-White	4000 K	(Optional)	XXX.	60.	XX.	.	XX.	XXX.	X
		* (only in combination with dimming DMX)									
		Combinations up to 3 strips of LED possible									
Dimming		Dimmable 0 - 10 V		(Standard)	XXX.	XX.	51.	00.	XX.	XXX.	X
		DMX (RGB possible)		(Optional)	XXX.	XX.	31.	00.	XX.	XXX.	X
		LUTRON (contact factory)		(Optional)	XXX.	XX.	71.	00.	XX.	XXX.	X
Finishes		30 anthracite	27 aluminum	32 black	33	35					
	[HUKHYK11 white (Optional)]										
		36 brass	37 bronze	38 copper	10 black						
		40 brass	42 bronze		XX						
					*\Z[V ÄUPZO	XXX.	XX.	XX.	XX.	XXX.	X
Power Supply Cable		Z 71 white	Z 72 grey	Z 73 black							
	[HUKHYKZ70 :PS]LY (Optional)]										
When using current carrying steel cables in Mounting Versions F, K, T		Z 74 orange	Z 75 YLK	Z 76 green							
	SLH]L [OPZ ZLJ[PVU ISHU										
						XXX.	XX.	XX.	XX.	...	X

CIRCOLO INVERSE


Housing: Circular aluminum profile, opal acrylic cover on the outside
Design: SATTLER

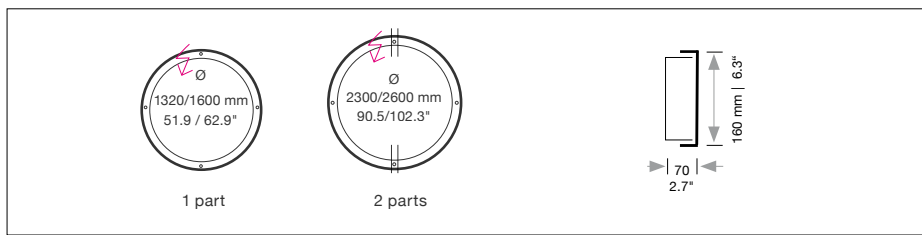


Mounting Version




4-point suspension with external power supply unit in suspended ceiling




2600mm 4-point suspension with external power supply unit in separate canopy




Up to Ø 1600 mm 1-point suspension with external power supply unit in separate canopy




Up to Ø 1600 mm suspension through canopy




Up to Ø 1600 mm 4 current-carrying steel cables. Only 1 strip LED possible. Not in combination with RGB




Up to Ø 1600 mm Suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"




Up to Ø 1600 mm Suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy



Suspension point as clamping unit with 4 current-carrying cables and remote technical unit in suspended ceiling. (up to Ø 1600 mm)

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, C, G, H, K = Distance of external power supply unit to light fixture max. 10m / 394".

E, F, S, T, K = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm / 197" ; Version F, S, T 5000 / 3000mm / 197"/118" and/or power supply cable 5000mm / 197"

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Typ	Dimensions of external power supply units (1 LED Stripe)			Size of lamp mm / inch.	For use with Mounting Version
	Size mm / inch L W H				
DE 1F	360 x 150 x 85	Ø 1320 / 29.5"	A, C, G, K		
	14.2 x 5.9 x 3.3"	Ø 1600 / 62.9"	A, C, G		
DE 2F	360 x 300 x 85	Ø 2300 / 90.5"	A, G		
	14.2 x 11.8 x 3.3"	Ø 2600 / 102.3"	A, G		

Input voltage for all external power supply units and canopy is 120 / 277 VAC 50/60 Hz

Typ	Dimensions of canopy (1 LED Stripe)		For use with Mounting Version
	Size mm / inch	Ø cover plate / body	
DB 290	Ø 290 / 260 mm / 11.4 x 10.2"		B, D, E, F, H
		up to size Ø 1320 / 51.9"	
DB 350	Ø 350 / 320 mm / 13.7 x 12.5"		B, H
		up to size Ø 2600 / 102.3"	
PB 366	Ø 90 H 366 mm / 3.5 x 14.4"		S, T

Canopy finish: white (11) contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.


Optional



LED spot Set (2 spots)

LED Spot max. 9° Set (2) white / black
LED Spot max. 26° Set (2) white / black
LED Spot max. 36° Set (2) white / black
LED Spot max. 60° Set (2) white / black

910.68.01.18. 11/12
911.68.01.18. 11/12
912.68.01.18. 11/12
913.68.01.18. 11/12



Ceiling fixation for mounting version A

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.

200. 00. 00. 00. 11 (white)