


CIRCOLO INVERSE

Housing: Circular aluminum profile, opal acrylic cover on the outside
Design: SATTLER

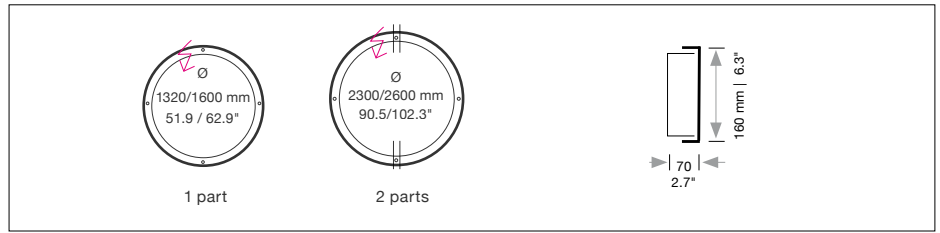

Size: L x W x H mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version																				
Sizes	Ø 1320 x 160 x 70	51.9 x 6.3 x 2.7	63	5,898	20 / 44.0	265.	x x.	x x.	x x.	x x.	x x x.	x																			
	Ø 1600 x 160 x 70	62.9 x 6.3 x 2.7	77	7,165	25 / 55.1	266.	x x.	x x.	x x.	x x.	x x x.	x																			
	Ø 2300 x 160 x 70	90.5 x 6.3 x 2.7	110	10,976	35 / 77.1	267.	x x.	x x.	x x.	x x.	x x x.	x																			
	Ø 2600 x 160 x 70	102.3 x 6.3 x 2.7	124	9,803	40 / 88.1	268.	x x.	x x.	x x.	x x.	x x x.	x																			
LED 24V CRI > 80		Neutral-white Cold-white Warm-white Extra warm-white Extra warm-white Tunable white* RGB color control* RGB + Neutral-White	4000 K 5000 K 3000 K 2700 K 2200 K 2700 - 6500 K 4000 K	(Standard) (Optional) (Optional) (Optional) (Optional) (Optional) (Optional) (Optional)	x x x. x x x. x x x. x x x. x x x. x x x. x x x. x x x.	40. 50. 30. 27. 22. 65. 60. 60.	x x. x x. x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x. x x. x x. x x.	x x x. x x x. x x x. x x x. x x x. x x x. x x x. x x x.	x x x x x x x x																				
Dimming		Dimmable 0 - 10 V DMX (RGB possible) LUTRON (contact factory)		(Standard) (Optional) (Optional)	x x x. x x x. x x x.	x x. x x. x x.	51. 31. 71.	00. 00. 00.	x x. x x. x x.	x x x. x x x. x x x.	x x x																				
Finishes		11 white		30 anthracite		27 brush-finished aluminum		32 crocodile black		33 sand silver fine textured		35 gold		36 brass		37 bronze fine textured		38 copper		10 black fine textured		40 brass patinated		42 bronze patinated		XX Custom finish	x x x. x x. x x. x x.	x x. x x. x x. x x.	x x x. x x. x x. x x.	x x x. x x. x x. x x.	x x x x
Power Supply Cable		Z 70 Silver		Z 71 white		Z 72 grey		Z 73 black		Z 74 orange		Z 75 red		Z 76 green	x x x. x x. x x. x x.	x x. x x. x x. x x.	x x x. x x. x x. x x.	x x x. x x. x x. x x.	x x x. x x. x x. x x.	x x x x											

SATTLER

410 381 1497 answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice

IP 20



Light distribution
direct / indirect




Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08


1) Net lumen output: Losses due to diffusers and reflectors are considered.
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
2) Weight of lights without remote technical unit or canopy.

CIRCOLO INVERSE


Housing: Circular aluminum profile, opal acrylic cover on the outside
Design: SATTLER

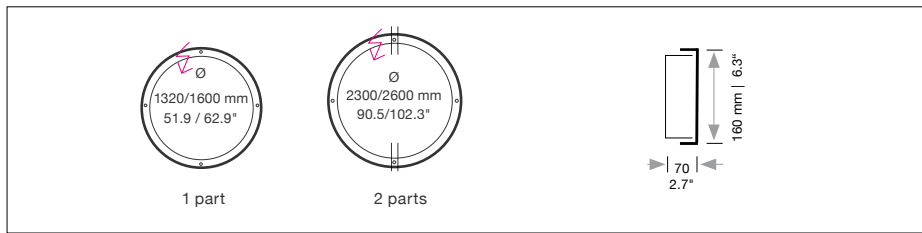


Mounting Version




4-point suspension with external power supply unit in suspended ceiling




2600mm 4-point suspension with external power supply unit in separate canopy




Up to Ø 1600 mm 1-point suspension with external power supply unit in separate canopy




Up to Ø 1600 mm suspension through canopy




Up to Ø 1600 mm 4 current-carrying steel cables. Only 1 strip LED possible. Not in combination with RGB




Up to Ø 1600 mm Suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"




Up to Ø 1600 mm Suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy



Suspension point as clamping unit with 4 current-carrying cables and remote technical unit in suspended ceiling. (up to Ø 1600 mm)

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, C, G, H, K = Distance of external power supply unit to light fixture max. 10m / 394".

E, F, S, T, K = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm / 197" ; Version F, S, T 5000 / 3000mm / 197"/118" and/or power supply cable 5000mm / 197"

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Typ	Dimensions of external power supply units (1 LED Stripe)			Size of lamp mm / inch.	For use with Mounting Version
	Size mm / inch L W H				
DE 1F	360 x 150 x 85	Ø 1320 / 29.5"	A, C, G, K		
	14.2 x 5.9 x 3.3"	Ø 1600 / 62.9"	A, C, G		
DE 2F	360 x 300 x 85	Ø 2300 / 90.5"	A, G		
	14.2 x 11.8 x 3.3"	Ø 2600 / 102.3"	A, G		

Input voltage for all external power supply units and canopy is 120 / 277 VAC 50/60 Hz

Typ	Dimensions of canopy (1 LED Stripe)		For use with Mounting Version
	Size mm / inch	Ø cover plate / body	
DB 290	Ø 290 / 260 mm / 11.4 x 10.2"		B, D, E, F, H
		up to size Ø 1320 / 51.9"	
DB 350	Ø 350 / 320 mm / 13.7 x 12.5"		B, H
		up to size Ø 2600 / 102.3"	
PB 366	Ø 90 H 366 mm / 3.5 x 14.4"		S, T

Canopy finish: white (11) contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.


Optional



LED spot Set (2 spots)

LED Spot max. 9° Set (2) white / black
LED Spot max. 26° Set (2) white / black
LED Spot max. 36° Set (2) white / black
LED Spot max. 60° Set (2) white / black

910.68.01.18. 11/12
911.68.01.18. 11/12
912.68.01.18. 11/12
913.68.01.18. 11/12



Ceiling fixation for mounting version A

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.

200. 00. 00. 00. 11 (white)