
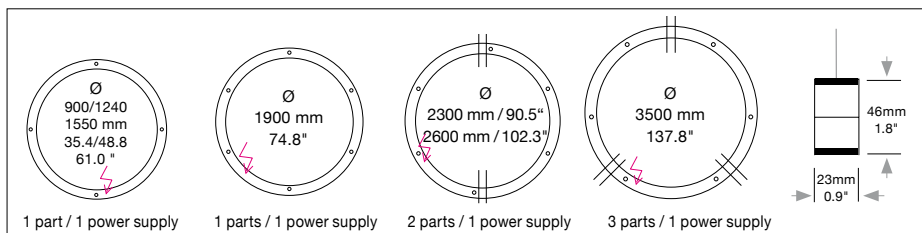


## DOPPIO DIRECT / INDIRECT


Housing: Circular aluminum profile with integrated acrylic covers.  
Design: SATTLER

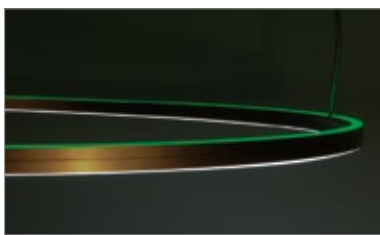


	Size: L x W x H mm	inches	LED Watt	Lumen <sup>1)</sup>	weight kg <sup>2)</sup> / lbs <sup>2)</sup>	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version			
<b>Sizes</b>	Ø 900 mm	35.4"	55 / 23	2,352 / 1,094	9 / 19.8	<b>779.</b>	X X.	X X.	X X.	X X.	X X X.	X			
	Ø 1240 mm	48.8"	72 / 30	3,027 / 1,300	10 / 22.0	<b>780.</b>	X X.	X X.	X X.	X X.	X X X.	X			
Indirect	Ø 1550 mm	61.0"	88 / 39	3,931 / 1,818	11 / 24.3	<b>781.</b>	X X.	X X.	X X.	X X.	X X X.	X			
	Ø 1900 mm	74.8"	110 / 46	4,592 / 2,120	12 / 26.5	<b>782.</b>	X X.	X X.	X X.	X X.	X X X.	X			
	Ø 2300 mm	90.5"	140 / 60	5,975 / 2,779	19 / 41.9	<b>783.</b>	X X.	X X.	X X.	X X.	X X X.	X			
	Ø 2600 mm	102.3"	165 / 69	6,702 / 3,067	21 / 46.3	<b>784.</b>	X X.	X X.	X X.	X X.	X X X.	X			
Direct	Ø 3500 mm	137.8"	210 / 88	8,753 / 4,178	29 / 63.9	<b>785.</b>	X X.	X X.	X X.	X X.	X X X.	X			
Direct and indirect light separately switchable. If ordered with dimmer also separately dimmable															
<b>DIRECT LED</b> 24V CRI > 90 *CRI > 80			<b>Warm-white</b> <b>Neutral-white</b> <b>Extra warm-white</b> <b>Extra warm-white</b>	<b>3000 K (Standard)</b> <b>4000 K (Optional)</b> <b>2700 K (Optional)</b> <b>2200 K* (Optional)</b>		X X X. X X X. X X X. X X X.	<b>30.</b> <b>40.</b> <b>27.</b> <b>22.</b>	X X. X X. X X. X X.	X X. X X. X X. X X.	X X. X X. X X. X X.	X X X. X X X. X X X. X X X.	X X X X			
<b>INDIRECT LED</b> 24V CRI > 90 *CRI > 80	 		<b>Warm-white</b> <b>Neutral-white</b> <b>Extra warm-white</b> <b>Extra warm-white</b> <b>RGB color control*</b>	<b>3000 K (Standard)</b> <b>4000 K (Optional)</b> <b>2700 K (Optional)</b> <b>2200 K* (Optional)</b>		X X X. X X X. X X X. X X X. X X X.	X X. X X. X X. X X. X X.	X X. X X. X X. X X. X X.	X X. X X. X X. X X. X X.	X X. X X. X X. X X. X X.	X X X. X X X. X X X. X X X. X X X.	X X X X X			
Indirect light is significantly weaker than direct light output															
<b>Dimming</b>			<b>Dimmable 0 - 10 V</b> <b>DMX (RGB possible)</b> <b>LUTRON (contact factory)</b>	<b>(Standard)</b> <b>(Optional)</b> <b>(Optional)</b>		X X X. X X X. X X X.	X X. X X. X X.	<b>52.</b> <b>32.</b> <b>72.</b>	X X. X X. X X.	X X. X X. X X.	X X X. X X X. X X X.	X X X			
<b>Finishes</b>		<b>11</b> white (Optional)		<b>22</b> aluminum polished		<b>27</b> brush-finished aluminum		<b>30</b> anthracite		<b>32</b> crocodile black		<b>33</b> sand silver fine textured			
		<b>XX</b> Custom finish		<b>35</b> gold		<b>36</b> brass		<b>37</b> bronze fine textured		<b>38</b> copper		<b>10</b> black fine textured	X X X. X X. X X. X X. X X. X X X.		
<b>Power Supply Cable</b>		<b>Z 70</b> Silver (Optional)		<b>Z 71</b> white		<b>Z 72</b> grey		<b>Z 73</b> black		<b>Z 74</b> orange		<b>Z 75</b> red		<b>Z 76</b> green	X X X. X X. X X. X X. X X. X X X.
When using current carrying steel cables in Mounting Versions F, K, R, T leave this section blank															

1) Net lumen output: Losses due to diffusers and reflectors are considered.  
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.  
2) Weight of lights without remote technical unit or canopy.


## DOPPIO DIRECT / INDIRECT

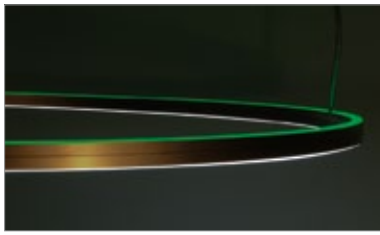


Housing: Circular aluminum profile with integrated acrylic cover on the downside.  
Design: SATTLER

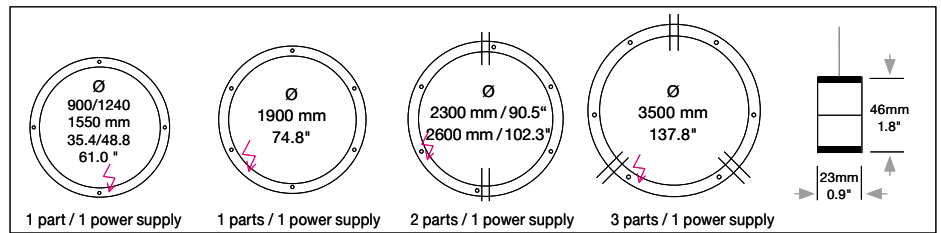


### Mounting Version




**Standard**  
up to Ø 1900 mm / 74.8"  
4-point suspension  
up to Ø 3500 mm  
6-point suspension  
with external power supply  
unit in suspended ceiling




up to Ø 1900 mm / 74.8"  
4-point suspension  
up to Ø 3500 mm  
6-point suspension  
with external power supply  
unit in separate canopy




up to Ø 1900 mm / 74.8"  
suspension through canopy




up to Ø 1900 mm / 74.8"  
4 current-carrying steel  
cables. Not in combination  
with RGB




up to Ø 1900 mm / 74.8"  
Suspension with current-  
carrying steel cables and  
cavity wall box. Not in  
combination with RGB.



up to Ø 1900 mm / 74.8"  
Suspension with pendant  
canopy PB 656  
and steel cables  
(a) 5000 mm / 196.8" +  
(b) 3000 mm / 118.1"



up to Ø 1900 mm / 74.8"  
Suspension with pendant  
canopy PB 656 and current-  
carrying steel cables.  
(a) 5000 mm / 196.8" +  
(b) 3000 mm / 118.1"  
Not in combination with RGB.



up to Ø 1900 mm / 74.8"  
Suspension point as clamp-  
ing unit with 4/6 cables  
and remote technical unit in  
suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

**A, B, R, K** = Distance of external power supply unit to light fixture max. 10m / 394".

**E, F, S, T, K** = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm/197"; Version F,R 3000mm/118";  
Version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Typ	Dimensions of external power supply units			For use with Mounting Version
	Size mm / inch	L	W H	
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"			A,R (up to Ø 1900mm)
DE 2F	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"			A,R (up to Ø 3500mm)

Typ	Dimensions of canopy			For use with Mounting Version
	Size mm / inch	Ø cover plate / body / H		
DB 350	Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"			B,E,F, (up to Ø 1900 mm)
DB 500	Ø 510 / 470 / 60 mm / 20.0 x 18.5 / 2.3"			B, (up to Ø 3500 mm)
PB 656	Ø 90 H 656 mm / 3.5 x 25.8"			S, T

Canopy finish: white (11) contact factory for other finishes  
USA/Canada: Canopy mounts to 4" octagonal junction box.


Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

### Optional



**LED spot in canopy**  
4W/20°-40°, 400 Lumen (order separately)

**762. 67. 01. 04. 11.** (white)



### Ceiling mounting version A

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.

**200. 00. 00. 00. 11** (white)

# SATTLER

410 381 1497 answers@inter-lux.com  
inter-lux reserves the right to make technical changes without notice

IP 20



Light distribution  
direct / indirect



Conforms to UL-STD 1598  
Certified to CSA-STD C22.2  
No.250-0-08

- Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
- Weight of lights without remote technical unit or canopy.