










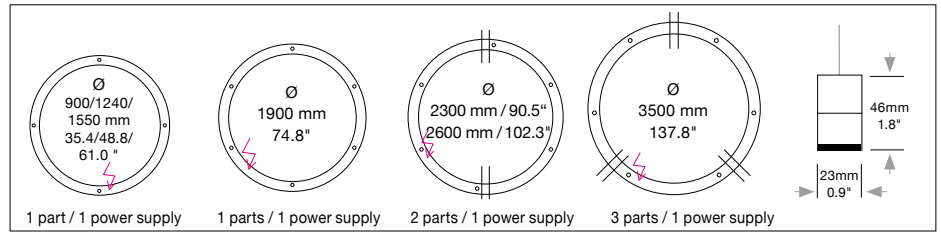

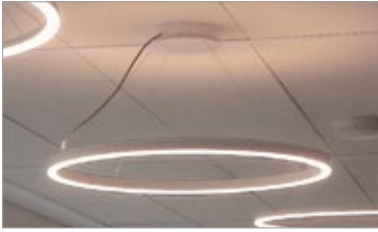















DOPPIO DIRECT

Housing: Circular aluminum profile with integrated acrylic cover on the downside.
Design: SATTLER




Sizes	Size: L x W x H mm		LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
	inches											
 Direct	Ø 900 mm	35.4"	55	2,352	9 / 19.8	779.	X X.	X X.	X X.	X X.	X X X.	X
	Ø 1240 mm	48.8"	72	3,027	10 / 22.0	780.	X X.	X X.	X X.	X X.	X X X.	X
	Ø 1550 mm	61.0"	88	3,931	11 / 24.3	781.	X X.	X X.	X X.	X X.	X X X.	X
	Ø 1900 mm	74.8"	110	4,592	12 / 26.5	782.	X X.	X X.	X X.	X X.	X X X.	X
	Ø 2300 mm	90.5"	140	5,975	19 / 41.9	783.	X X.	X X.	X X.	X X.	X X X.	X
	Ø 2600 mm	102.3"	165	6,702	21 / 46.3	784.	X X.	X X.	X X.	X X.	X X X.	X
	Ø 3500 mm	137.8"	210	8,753	29 / 63.9	785.	X X.	X X.	X X.	X X.	X X X.	X
LED 24V CRI > 90 *CRI > 80		Warm-white Neutral-white Extra warm-white Extra warm-white	3000 K 4000 K 2700 K 2200 K*	(Standard) (Optional) (Optional) (Optional)	X X X. X X X. X X X. X X X.	30. 40. 27. 22.	X X. X X. X X. X X.	X X. X X. X X. X X.	X X. X X. X X. X X.	X X X. X X X. X X X. X X X.	X X X X	
Dimming		Dimmable 0 - 10 V DMX (RGB possible) LUTRON (contact factory)	(Standard) (Optional) (Optional)	X X X. X X X. X X X.	X X. X X. X X.	51. 31. 71.	X X. X X. X X.	X X. X X. X X.	X X. X X. X X.	X X X. X X X. X X X.	X X X	
Finishes	(Standard)  11 white	(Optional)  22* aluminum polished	 27* brush-finished aluminum	 30 anthracite	 32 crocodile black	 33 sand silver fine textured						
			 35 gold	 36 brass	 37 bronze fine textured	 38 copper	 10 black fine textured					
		*22, 27 Ring aluminum polished or brush-finished Top cover black			 XX Custom finish						X X X. X X. X X. X X. X X. X X X. X X X. X X X.	X X X X X X X X
Power Supply Cable	(Standard)  Z 70 Silver	(Optional)  Z 71 white	 Z 72 grey	 Z 73 black								
When using current carrying steel cables in Mounting Versions F, K, R, T leave this section blank		 Z 74 orange	 Z 75 red	 Z 76 green							X X X. X X. X X. X X. X X. X X X. X X X. X X X.	X X X X X X X X


DOPPIO DIRECT




Housing: Circular aluminum profile with integrated acrylic cover on the downside.
Design: SATTLER

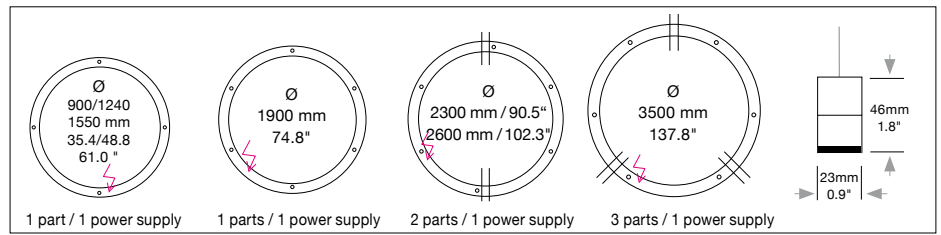


Mounting Version




Standard
up to Ø 1900 mm / 74.8"
4-point suspension
up to Ø 3500 mm / 137.8"
6-point suspension
with external power supply
unit in suspended ceiling




up to Ø 1900 mm / 74.8"
4-point suspension
up to Ø 3500 mm / 137.8"
6-point suspension
with external power supply
unit in separate canopy




up to Ø 1900 mm / 74.8"
suspension through canopy




up to Ø 1900 mm / 74.8"
4/6 current-carrying steel
cables. Not in combination
with RGB




up to Ø 1900 mm / 74.8"
Suspension with 4/6 current-
carrying steel cables and
cavity wall box. Not in
connection with RGB.




up to Ø 1900 mm / 74.8"
Suspension with pendant
canopy PB 366
and steel cables
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"




up to Ø 1900 mm / 74.8"
Suspension with pendant
canopy PB 366 and current-
carrying steel cables.
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"
Not in combination with RGB.



up to Ø 2600 mm / 102.3"
Direct ceiling mounting
50mm / 1.9" with external
power supply unit in
suspended ceiling



up to Ø 2600 mm / 102.3"
Direct ceiling mounting
(white) 50mm / 1.9" with
external power supply unit in
separate canopy



up to Ø 1900 mm / 74.8"
Suspension point as clamp-
ing unit with 4/6 cables
and remote technical unit in
suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, G, H, R = Distance of external power supply unit to light fixture max. 10m / 394".

E, F, S, T, K = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture


Including steel cable suspension 5000mm/197"; Version F,R 3000mm/118";
Version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Typ	Size mm / inch		For use with Mounting Version
	L	W H	
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, G, R, K (up to Ø 1500 mm)	
DE 2F	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"	A, G, R, K (up to Ø 3500 mm)	

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**



Typ	Size mm / inch		For use with Mounting Version
	Ø cover plate / body / H		
DB 230	Ø 230 / 210 / 60 mm / 9.5 / 8.3 / 2.3"	B, E, F, H (Ø 900 mm)	
DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F, H (up to Ø 1550)	
DB 350	Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, F, H (up to Ø 3500 mm)	
PB 366	Ø 90 H 366 mm / 3.5 x 14.4"	S, T	


Canopy finish: white (11) contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.

Optional



LED spot in canopy (DOPPIO size Ø 900 mm, Dimension canopy DB 290)
4W/20°-40°, 400 Lumen (order separately)

762. 67. 01. 04. 11. (white)



Ceiling mounting version A, G

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, G.

200. 00. 00. 00. 11 (white)