




- 1. Mini Box Cove (WG-MBC-SM-PR-12x12-M-927-X-SSD-W)
- 2. Mini Edgeless Cove (WG-MEC-RPT-S-18-M-930-X-SSD-W-REC)
- 3. Box Cove 2 (WG-BC2-SM-S-21.625-P2-930-E1-SSD-W)
- 4. 20 Mini Edgeless Cove (WG-20MEC-RPT-S-18-M-930-X-SD-W)
- 5. Edgeless Cove (Housing)
- 6. Box Cove (Housing)
- 7. Driver (24VDC Plug-In Adapter)

# Coves Case Guide

## 1. Mini Box Cove



### Fixation

- SM = Surface mount

### Pattern

- S = Straight run<sup>1</sup>
- PC = Standard patterns coffer 2, 3 or 4 sided with 90° corners<sup>2</sup>
- PR = Standard patterns raft 2, 3 or 4 sided with 90° corners<sup>2</sup>
- PZ = Non-standard patterns and/or corners other than 90°, consult factory<sup>2</sup>

### Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25") For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)

### Power<sup>3</sup>

- L = 3W/ft low power (24V)
- M = 6W/ft medium power (24V)
- H = 10W/ft high power (24V)
- XH = 13W/ft extra high power (24V)

### CRI/CCT<sup>4</sup> 90+ CRI minimum (Low/Mid/High/Extra High)

- 927 = 2700K, (222/443/776/998 lm/ft)
- 930 = 3000K, (241/482/844/1085 lm/ft)
- 935 = 3500K, (286/573/1003/1289 lm/ft)
- 940 = 4000K, (340/681/1191/1532 lm/ft)

### Driver (remote)<sup>5</sup>

- X = No driver, ordered separately
- S = Standard driver 120-277V
- DO10 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1%, 120VAC

### Lens

- SSD = Snap On Satin Diffuser (standard)
- SDC = Satin Clear Dust Cover

### Finish



- W = White, 15% gloss, RAL9010 (standard)
- F = Custom finish, specify RAL

### Options

- LEC = Left end cap
- REC = Right end cap
- LREC = Left & Right end caps

- 1 Standard setup assumes the cove ends at a perpendicular wall and the LED board is setback from the end to minimize light on the perpendicular wall. Contact us for options.
- 2 See pattern specs sheet.
- 3 Wattage shown does not include power supplies/drivers.
- 4 Delivered lumens with snap on satin diffuser shown.
- 5 Remote drivers required. See power supply page for details.

## 2. Mini Edgeless Cove

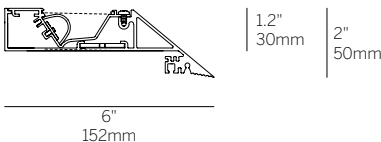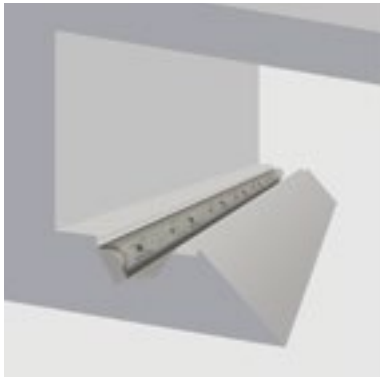

### Fixation

- RPT = Recessed plaster trim

### Pattern

- S = Straight run<sup>1</sup>
- PC = Standard patterns coffer 2, 3 or 4 sided with 90° corners<sup>2</sup>
- PR = Standard patterns raft 2, 3 or 4 sided with 90° corners<sup>2</sup>
- PZ = Non-standard patterns and/or corners other than 90°, consult factory<sup>2</sup>

### Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25") For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)

### Power<sup>3</sup>

- L = 3W/ft low power (24V)
- M = 6W/ft medium power (24V)
- H = 10W/ft high power (24V)
- XH = 13W/ft extra high power (24V)

### CRI/CCT<sup>4</sup> 90+ CRI minimum (Low/Mid/High/Extra High)

- 927 = 2700K, (222/443/776/998 lm/ft)
- 930 = 3000K, (241/482/844/1085 lm/ft)
- 935 = 3500K, (286/573/1003/1289 lm/ft)
- 940 = 4000K, (340/681/1191/1532 lm/ft)

### Driver (remote)<sup>5</sup>

- X = No driver, ordered separately
- S = Standard driver 120-277V
- DO10 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1%, 120VAC

### Lens

- SSD = Snap On Satin Diffuser (standard)
- SDC = Satin Clear Dust Cover

### Finish

- W = White, 15% gloss, RAL9010 (standard)
- F = Custom finish, specify RAL


### Options

- LEC = Left end cap
- REC = Right end cap
- LREC = Left & Right end caps
- LWR = Left wall return
- RWR = Right wall return

- 1 Standard setup assumes the cove ends at a perpendicular wall and the LED board is setback from the end to minimize light on the perpendicular wall. Contact us for options.
- 2 See pattern specs sheet.
- 3 Wattage shown does not include power supplies/drivers.
- 4 Delivered lumens with snap on satin diffuser shown.
- 5 Remote drivers required. See power supply page for details.

# Coves Case Guide

## 3. Box Cove 2



### Fixation

- WM = Surface mount

### Pattern

- S = Straight run<sup>1</sup>
- PC = Standard patterns coffer 2, 3 or 4 sided with 90° corners<sup>2</sup>
- PR = Standard patterns raft 2, 3 or 4 sided with 90° corners<sup>2</sup>
- PZ = Non-standard patterns and/or corners other than 90°, consult factory<sup>2</sup>

### Length

- 24 = 24"
- 36 = 36"
- 48 = 48"
- 72 = 72"
- 96 = 96"
- XX = Specify inches to the nearest 0.25"

### Power<sup>3</sup> (2700/3000/3500/4000K)

- P1 = 3W/ft (393/409/424/435 lm/ft)
- P2 = 6W/ft (700/728/755/774 lm/ft)
- P3 = 10W/ft (1153/1220/1244/1277 lm/ft)
- P4 = 15W/ft (1671/1740/1822/1871 lm/ft)

### CRI/CCT<sup>4</sup> 90+ CRI

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW = Tuneable white 2200-4000K

### Driver (integral)<sup>5</sup>

- E1 = EldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- L0 = Lutron 0.1% dimming, Ecosystem (120-277V)
- A3 = Advance 1% dimming, 0-10V (347V ONLY)
- PoE = Power over Ethernet
- BT = Wireless CAS – Casambi (Tunable white ONLY)
- TQ = T-Series for Lutron Quantum 0.1% (120-277V) (Tunable white ONLY)
- D2 = Two-channel DALI-2 certified 0.1% (120-277V) (Tunable white ONLY)

### Lens

- SSD = Snap On Satin Diffuser (standard)
- SDC = Satin Clear Dust Cover

### Finish


- W = White, 15% gloss, RAL9010 (standard)
- SA = Satin Aluminum
- DB = Dark Bronze
- F = Custom finish, specify RAL

### Options

- BM = Bracket Mount
- EWM = End Wall Mount

- 1 Standard setup assumes the cove ends at a perpendicular wall and the LED board is setback from the end to minimize light on the perpendicular wall. Contact us for options.
- 2 See pattern specsheet.
- 3 Wattage shown does not include power supplies/drivers.
- 4 Delivered lumens with snap on satin diffuser shown.
- 5 Remote drivers required. See power supply page for details.

## 4. 20 Mini Edgeless Cove



### Fixation

- RPT = Recessed plaster trim

### Pattern

- S = Straight run<sup>1</sup>
- PC = Standard patterns coffer 2, 3 or 4 sided with 90° corners<sup>2</sup>
- PR = Standard patterns raft 2, 3 or 4 sided with 90° corners<sup>2</sup>
- PZ = Non-standard patterns and/or corners other than 90°, consult factory<sup>2</sup>

### Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25") For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)

### Power<sup>3</sup>

- L = 3W/ft low power (24V)
- M = 6W/ft medium power (24V)
- H = 10W/ft high power (24V)

### CRI/CCT<sup>4</sup> 90+ CRI minimum (Low/Mid/High)

- 927 = 2700K, (237/475/831 lm/ft)
- 930 = 3000K, (258/516/903 lm/ft)
- 935 = 3500K, (306/613/1073 lm/ft)
- 940 = 4000K, (364/728/1275 lm/ft)

### Driver (remote)<sup>5</sup>

- X = No driver, ordered separately
- S = Standard driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1%, 120VAC

### Lens

- SD = Satin clear diffuser (standard)

### Finish

- W = White, 15% gloss, RAL9010 (standard)
- F = Custom finish, specify RAL



### Options

- CDC = Clear dust cover

- 1 Standard setup assumes the cove ends at a perpendicular wall and the LED board is setback from the end to minimize light on the perpendicular wall. Contact us for options.
- 2 See pattern specsheet.
- 3 Wattage shown does not include power supplies/drivers.
- 4 Delivered lumens with satin clear diffuser shown.
- 5 Remote drivers required. See power supply page for details.

# Coves Case Guide

## 5. Edgeless Cove

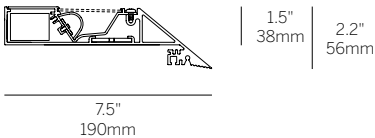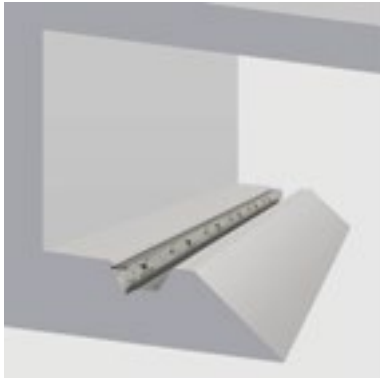

### Fixation

- RPT = Recessed plaster trim

### Pattern

- S = Straight run<sup>1</sup>
- PC = Standard patterns coffer 2, 3 or 4 sided with 90° corners<sup>2</sup>
- PR = Standard patterns raft 2, 3 or 4 sided with 90° corners<sup>2</sup>
- PZ = Non-standard patterns and/or corners other than 90°, consult factory<sup>2</sup>

### Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25") For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)

### Power<sup>3</sup>

- L = 3W/ft low power (24V)
- M = 6W/ft medium power (24V)
- H = 10W/ft high power (24V)
- XH = 13W/ft extra high power (24V)

### CRI/CCT<sup>4</sup> 90+ CRI minimum (Low/Mid/High/Extra High)

- 927 = 2700K, (222/445/779/1002 lm/ft)
- 930 = 3000K, (242/484/847/1089 lm/ft)
- 935 = 3500K, (287/575/1006/1294 lm/ft)
- 940 = 4000K, (341/683/1195/1538 lm/ft)

### Driver (integral)<sup>5</sup>

- X = No driver, ordered separately
- S = Standard driver 120-277V
- DO10 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V (remote)
- DFPN = Lutron Forward Phase 1%, 120VAC

### Lens


- SSD = Snap On Satin Diffuser (standard)
- SDC = Satin Clear Dust Cover

### Finish

- W = White, 15% gloss, RAL9010 (standard)
- F = Custom finish, specify RAL

- 1 Standard setup assumes the cove ends at a perpendicular wall and the LED board is setback from the end to minimize light on the perpendicular wall. Contact us for options.
- 2 See pattern specsheet.
- 3 Wattage shown does not include power supplies/drivers.
- 4 Delivered lumens with snap on satin diffuser shown.
- 5 Integral driver, except L3DOE (remote only). See power supply page for details.

## 6. Box Cove



### Fixation

- SM = Surface mount

### Pattern

- S = Straight run<sup>1</sup>
- PC = Standard patterns coffer 2, 3 or 4 sided with 90° corners<sup>2</sup>
- PR = Standard patterns raft 2, 3 or 4 sided with 90° corners<sup>2</sup>
- PZ = Non-standard patterns and/or corners other than 90°, consult factory<sup>2</sup>

### Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25") For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)

### Power<sup>3</sup>

- L = 3W/ft low power (24V)
- M = 6W/ft medium power (24V)
- H = 10W/ft high power (24V)
- XH = 13W/ft extra high power (24V)

### CRI/CCT<sup>4</sup> 90+ CRI minimum (Low/Mid/High/Extra High)

- 927 = 2700K, (222/445/779/1002 lm/ft)
- 930 = 3000K, (242/484/847/1089 lm/ft)
- 935 = 3500K, (287/575/1006/1294 lm/ft)
- 940 = 4000K, (341/683/1195/1538 lm/ft)

### Driver (integral)<sup>5</sup>

- X = No driver, ordered separately
- S = Standard driver 120-277V
- DO10 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V (remote)
- DFPN = Lutron Forward Phase 1%, 120VAC

### Lens

- SSD = Snap On Satin Diffuser (standard)
- SDC = Satin Clear Dust Cover

### Finish

- W = White, 15% gloss, RAL9010 (standard)
- F = Custom finish, specify RAL

### Options

- LEC = Left end cap
- REC = Right end cap
- LREC = Left & right end caps

- 1 Standard setup assumes the cove ends at a perpendicular wall and the LED board is setback from the end to minimize light on the perpendicular wall. Contact us for options.
- 2 See pattern specsheet.
- 3 Wattage shown does not include power supplies/drivers.
- 4 Delivered lumens with snap on satin diffuser shown.
- 5 Integral driver, except L3DOE (remote only). See power supply page for details.