


# 5.5" ProTools Cylinders - Integral driver information

Please refer to driver manufacturer's website for current data sheets and wiring guidelines.

**EH30 = standard Triac / ELV / 0-10V 1% dimming 120-277V, 30W (Phase / Triac 120V only)** [spec sheet](#)


### Triac / ELV Wiring Diagram

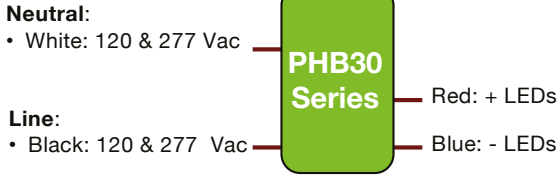


### COMPATIBLE PHASE-CUT DIMMERS & DIMMING RANGE

120Vac Dimmers					
Mfg.	Model	Mfg.	Model	Mfg.	Model
Leviton	IPI06-1LZ	Leviton	6161	Leviton	LGCL-153PL
Lutron	DVCL-153P	Cooper	DLC03P-W	Lutron	SCL-153P
Lutron	TGCL-153P	Lutron	CT-103P	Lutron	MACL-153M
Lutron	S-600P	Lutron	DV603P	Cooper	AAL06A-C2
Leviton	VPE06	Cooper	SLC03P	Leviton	DVLV600P
Lutron	SELV-300P	Lutron	MAELV600	Lutron	IPL06
Leviton	6673-10W	Lutron	FAELV500	Lutron	RRD-6CL
Leviton	VPI06-ILT	Cooper	DAL06P		

### 0-10V Wiring Diagram

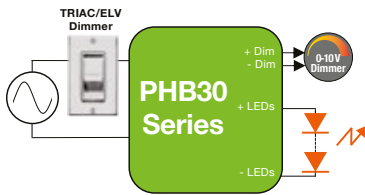

**PEQ0 = Lutron Hi-Lume Premier 0.1% EcoSystem, 120-277V (H power only)** [spec sheet](#)

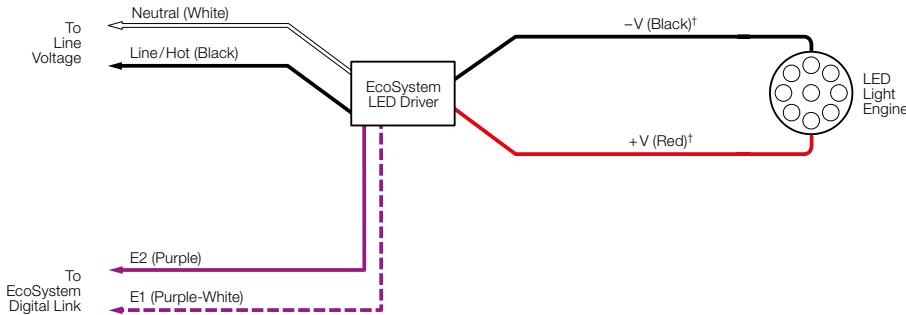

### Compatible Controls: Lutron EcoSystem Digital Controls

Lutron EcoSystem Compatible Controls	Part Number		Drivers per Control		
	120 V~	277 V~	EcoSystem Loops per Control	Drivers per EcoSystem Loop	Maximum Drivers per Control
PowPak Dimming Modules	RMJ-ECO32-DV-B		1	32	32
	FCJ/FCJS-ECO <sup>1</sup>		1	3	3
Energi Savr Node	QSN-1ECO-S	N/A	1	64	64
	QSN-2ECO-S		2	64	128
GRAFIK Eye QS / HomeWorks QS control unit	QSGRJ-_E (wireless) QSGR-_E	N/A	1	64	64
Quantum Hub	QP2-__ 2C	N/A	2	64	128
	QP2-__ 4C		4	64	256
	QP2-__ 6C		6	64	384
	QP2-__ 8C		8	64	512

<sup>1</sup> All devices connected to one FCJ/FCJS-ECO will be controlled together. Devices will dim to the same level as the result of a control command. For more detail on adjusting low-end light level refer to Application Note #556 (048556) at [www.lutron.com](http://www.lutron.com)