



## DOPPIO LINEA DIRECT / INDIRECT

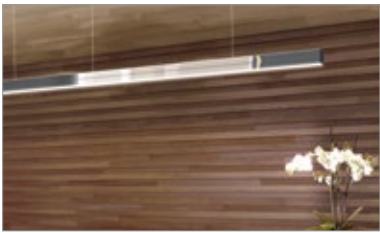

Housing: Aluminum profile with integrated acrylic  
Design: SATTLER

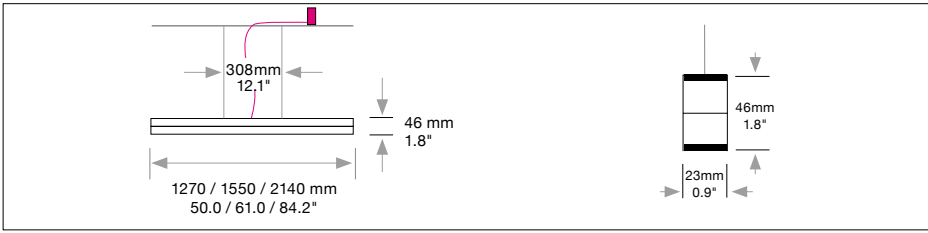

Size: L x W x H mm	inches	LED Watt	Lumen <sup>1)</sup>	weight kg <sup>2)</sup> / lbs <sup>2)</sup>	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
<b>Sizes</b>											
<b>Indirect</b>											
<b>1270 mm</b>	<b>50.0"</b>	23 / 11	1,197 / 451	2.0 / 4.4	<b>794.</b>	x x .	x x .	x x .	x x .	x x x .	x
<b>1550 mm</b>	<b>61.0"</b>	28 / 13	1,465 / 557	2.5 / 5.5	<b>795.</b>	x x .	x x .	x x .	x x .	x x x .	x
<b>2140 mm</b>	<b>84.2"</b>	39 / 18	2,016 / 759	3.0 / 6.6	<b>796.</b>	x x .	x x .	x x .	x x .	x x x .	x
<b>Direct</b>											
<b>Single lamp, not mountable in row</b>											
Direct and indirect light are switchable and dimmable together only											
<b>DIRECT LED</b> 24V CRI > 90 *CRI > 80		<b>Warm-white</b> <b>Neutral-white</b> <b>Extra warm-white</b> <b>Extra warm-white</b>	<b>3000 K (Standard)</b> <b>4000 K (Optional)</b> <b>2700 K (Optional)</b> <b>2200 K* (Optional)</b>		x x x . x x x . x x x . x x x .	<b>30.</b> <b>40.</b> <b>27.</b> <b>22.</b>	x x . x x . x x . x x .	x x . x x . x x . x x .	x x . x x . x x . x x .	x x x . x x x . x x x . x x x .	x x x x
<b>INDIRECT LED</b> 24V CRI > 90 *CRI > 80	 	<b>Warm-white</b> <b>Neutral-white</b> <b>Extra warm-white</b> <b>Extra warm-white</b> <b>RGB color control up to 1550**</b>	<b>3000 K (Standard)</b> <b>4000 K (Optional)</b> <b>2700 K (Optional)</b> <b>2200 K* (Optional)</b> <b>(Optional)</b>		x x x . x x x . x x x . x x x . x x x .	<b>30.</b> <b>40.</b> <b>27.</b> <b>22.</b> <b>60.</b>	x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x .	x x x . x x x . x x x . x x x . x x x .	x x x x x
Indirect light is significantly weaker than direct light output											
<b>Dimming</b>		<b>Dimmable 0 - 10 V</b> <b>DMX (RGB possible)</b> <b>LUTRON (contact factory)</b>	<b>(Standard)</b> <b>(Optional)</b> <b>(Optional)</b>		x x x . x x x . x x x .	<b>52.</b> <b>32.</b> <b>72.</b>	x x . x x . x x .	x x . x x . x x .	x x . x x . x x .	x x x . x x x . x x x .	x x x
<b>Finishes</b>											
(Standard)	<b>11</b> white	(Optional)	<b>22</b> aluminum polished	<b>27</b> brush-finished aluminum	<b>30</b> anthracite	<b>32</b> crocodile black	<b>33</b> sand silver fine textured				
	<b>XX</b> Custom finish		<b>35</b> gold	<b>36</b> brass	<b>37</b> bronze fine textured	<b>38</b> copper	<b>10</b> black fine textured	x x x .	x x .	x x .	x x .
											x
<b>Power Supply Cable</b>											
(Standard)	<b>Z 70</b> Silver	(Optional)	<b>Z 71</b> white	<b>Z 72</b> grey	<b>Z 73</b> black	<b>Z 74</b> orange	<b>Z 75</b> red	<b>Z 76</b> green			
When using current carrying steel cables in Mounting Versions F, R leave this section blank											
											x

9.6.17 DOPPIO LINEA DIRECT / INDIRECT


## SATTLER

410 381 1497 answers@inter-lux.com  
inter-lux reserves the right to make technical changes without notice


IP 20 Light distribution direct / indirect Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08

1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.  
2) Weight of lights without remote technical unit or canopy.


## DOPPIO LINEA DIRECT / INDIRECT

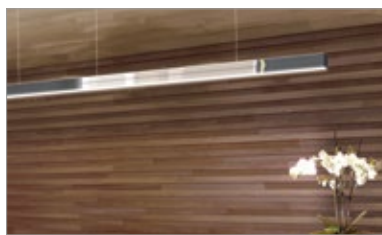


Housing: Aluminum profile with integrated acrylic  
Design: SATTLER

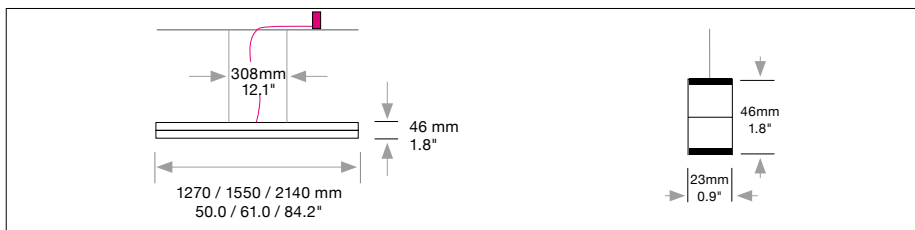


### Mounting Version




2-point suspension with external power supply unit in suspended ceiling



Suspension through canopy



Current-carrying steel cables. Not in combination with RGB



Suspension with current-carrying steel cables and cavity wall box. Not in connection with RGB.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, R = Distance of external power supply unit to light fixture max. 10m / 394".

Including steel cable suspension 2000mm / 78.7"  
or/and power supply cable 2000mm / 78.7"

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

**Dimensions of external power supply units**

Typ	Size mm / inch			For use with Mounting Version
	L	W	H	
<b>DE 1F</b>	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	<b>A, R</b>		
<b>In combination with RGB</b>				
<b>DE 2F</b>	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"	<b>A, R</b>		

**Dimensions of canopy**


Typ	Size mm / inch		For use with Mounting Version
	L	W	
<b>DBL 390</b>	up to Ø 2140 mm		<b>F / E</b>
	L 390 x W 70 x H 70 mm		
	L 15.3 x W 2.7 x H 2.7"		
<b>In combination with RGB</b>			
<b>DBL 490</b>	up to Ø 1550 mm		<b>F / E</b>
	L 492 x W 70 x H 70 mm		
	L 19.4 x W 2.7 x H 2.7"		

**Canopy finish: white (11)**  
contact factory for other finishes

USA/Canada: Canopy mounts to 4" single junction box.

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

### Optional



#### Ceiling mounting version A

**200. 00. 00. 00. 11** (white)  
Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.

