
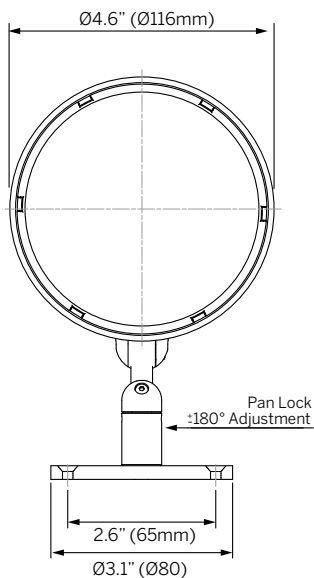


# ZTA.110 Surface

inter•lux

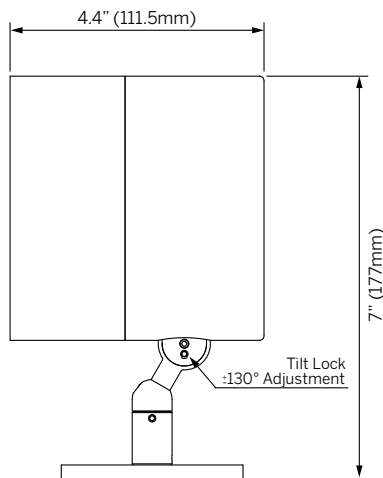

## Luminaire

- Interior rated spot light with fixed focus optics.
- Surface mounted.
- Precision machined from 70 - 90% recycled aluminum.
- 95+ CRI with multiple CCTs and optics available.

## Mounting

- SM = Surface Mounted

## Power<sup>1</sup>

- 12 = 12W (1341lm initial at 350mA, 36.9Vf)
- 36 = 36W (3850lm initial at 1050mA, 37Vf)

## CCT (95+ CRI)<sup>2</sup>

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

## Optic

- N1 = Narrow 1 (13°), 12W Only
- N2 = Narrow 2 (18°), 36W Only
- M = Medium (26°), 36W Only
- F = Flood (36°), 36W Only
- WF = Wide Flood (59°), 36W Only

## Finish (interior always matte black)

- W = Pure White, RAL9010
- BL = Matte Black, RAL9005
- CF = Custom finish, specify RAL

## Accessories<sup>3</sup>

- CL = Clear Lens
- DL = Diffused Lens
- HCL = Honeycomb Louver
- SOL = Solite Lens
- SHS = Sharp Spread Lens
- SOS = Soft Spread Lens

## Remote Driver<sup>4</sup>

- ECO30W-XXX = 0-10V EldoLED ECOdrive 30W 12W, 350mA, 1 fixture
- SOLO50W-XXX = 0-10V EldoLED SOLOdrive 50W 12W, 350mA, 1-2 fixtures (1 per output) 36W, 1050mA 1 fixture (1 per output)
- SOLO100W-XXX = 0-10V EldoLED SOLOdrive 100W 12W, 350mA, 1-4 fixtures (1 per output) 36W, 1050mA, 1-2 fixtures (1 per output)

1. Wattage shown is for LED only, system wattage varies depending on driver selected.
2. See photometric data sheet for delivered lumens.
3. Holds up to two accessories. See page 4 for details.
4. See driver information for details.

## Ordering Information

MS-ZTA110S	SM							
Model	Mounting	Power <sup>1</sup>	CRI/CCT <sup>2</sup>	Optic	Finish	Accessories <sup>3</sup>	+	Driver <sup>4</sup>
MS-ZTA110S	SM	12	927	N1	W	CL		ECO30W-XXX
		36	930	N2	BL	DL		SOLO50W-XXX
			935	M	CF	HCL		SOLO100W-XXX
			940	F		SOL		
				WF		SHS		
						SOS		



STOANE LIGHTING

410 381 1497 inter-lux.com answers@inter-lux.com  
Inter-lux reserves the right to make technical changes without notice.



Updated 3.2025 1