










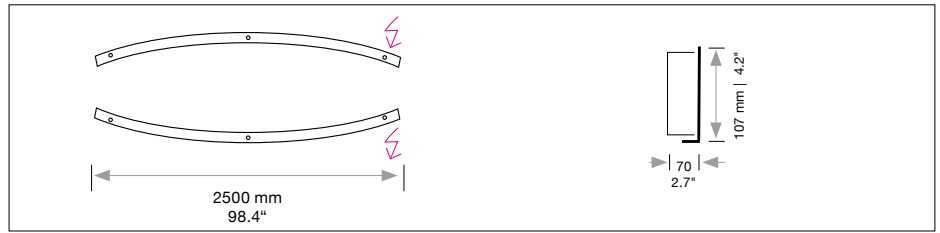















# ELLIPSE half-shell

Housing: Aluminum profile, L-shaped acrylic cover  
Design: SATTLER



Size: L x W x H mm		inches	LED Watt	Lumen <sup>1)</sup>	weight kg <sup>2)</sup> / lbs <sup>2)</sup>	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version		
Sizes	2500 x 107	98.4 x 4.2	84	6,917	17 / 37.5	240.	x x.	x x.	x x.	x x.	x x x.	x		
	Consisting of 2 half-shells													
	Further sizes on request													
LED 24V  CRI > 80		Neutral-white	4000 K	(Standard)	x x x.	69.	x x.	x x.	x x.	x x x.	x			
		Cold-white	5000 K	(Optional)	x x x.	62.	x x.	x x.	x x.	x x x.	x			
		Warm-white	3000 K	(Optional)	x x x.	63.	x x.	x x.	x x.	x x x.	x			
		Extra warm-white	2700 K	(Optional)	x x x.	61.	x x.	x x.	x x.	x x x.	x			
		Extra warm-white	2200 K	(Optional)	x x x.	22.	x x.	x x.	x x.	x x x.	x			
		Tunable white*	2700 - 6500 K	(Optional)	x x x.	65.	x x.	x x.	x x.	x x x.	x			
		RGB color control*		(Optional)	x x x.	60.	x x.	00.	x x.	x x x.	x			
		RGB + Neutral-White	4000 K	(Optional)	x x x.	60.	x x.	69.	x x.	x x x.	x			
		*(only in combination with dimming DMX)												
		Combinations up to two strips of LED possible												
Dimming		Dimmable 0 - 10 V	(Standard)	x x x.	x x.	51.	00.	x x.	x x x.	x				
		DMX (RGB possible)	(Optional)	x x x.	x x.	31.	00.	x x.	x x x.	x				
		LUTRON (contact factory)	(Optional)	x x x.	x x.	71.	00.	x x.	x x x.	x				
Finishes		11 white	(Optional)		22 aluminum polished		30 anthracite		27 brush-finished aluminum		32 crocodile black		33 sand silver fine textured	
			35 gold		36 brass		37 bronze fine textured		38 copper		10 black fine textured			
			40 brass patinated		42 bronze patinated		XX Custom finish	x x x.	x x.	x x.	x x.	. .	x x x.	x
Power Supply Cable (Standard)		Z 70 Silver	(Optional)		Z 71 white		Z 72 grey		Z 73 black					
			Z 74 orange		Z 75 red		Z 76 green	x x x.	x x.	x x.	x x.	. .	. . .	x

SATTLER

410 381 1497 answers@inter-lux.com  
inter-lux reserves the right to make technical changes without notice

IP 20



Light distribution  
direct / indirect




Conforms to UL-STD 1598  
Certified to CSA-STD C22.2  
No.250.0-08


1) Net lumen output: Losses due to diffusers and reflectors are considered.  
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.  
2) Weight of lights without remote technical unit or canopy.

ELLIPSE half-shell


Housing: Aluminum profile, L-shaped acrylic cover  
Design: SATTLER

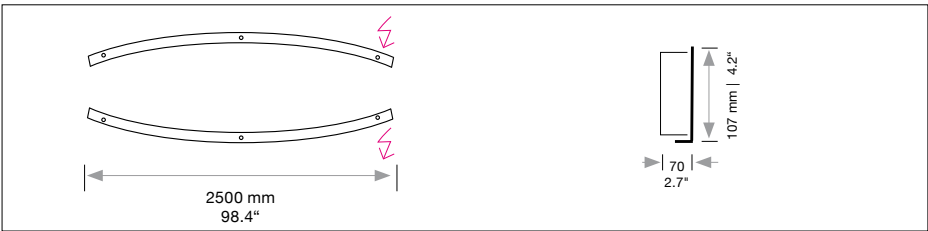


Mounting Version




2 x 3 point suspension with external power supply unit in suspended ceiling



2 x 3-point suspension with external power supply unit in separate canopy



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, G, H = Distance of external power supply unit to light fixture max. 10m / 394".

Including steel cable suspension 5000mm / 197" and power supply cable 5000mm / 197"



X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

**Dimensions of external power supply units (1 LED Stripe)**

Typ	Size mm / inch	For use with Mounting Version
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, G,

**Dimensions of canopy (1 LED Stripe)**


Typ	Size mm / inch	For use with Mounting Version
DB 350	Ø 350 / 320 mm / 13.7 x 12.5"	B, H

**Canopy finish: white (11)** contact factory for other finishes

USA/Canada: Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

Optional



**Ceiling fixation for mounting version A ( 2 necessary) 200. 00. 00. 00. 11** (white)

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.