


## ELLIPSE LIGHT + ACOUSTIC

Housing: (STPU\T WYVÄSL PU[LNYH[LK HJY`SPJ JV]LY -HIYPJ JV]LYPUN H  
+LZPNU! :(: ; 3, 9

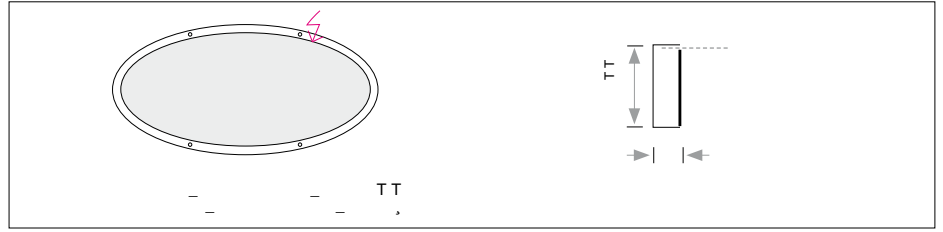


Size: L x W x H mm	inches	LED Watt	Lumen <sup>1)</sup>	weight kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
Sizes	1670 x 830 x 80 2400 x 1190 x 80	65.7 x 32.7 x 3.1 94.5 x 46.9 x 3.1			874. 886.	xx. xx.	xx. xx.	xx. xx.	xx. xx.	xxx. xxx.	x x
LED =		Neutral-white Cold-white Warm-white Extra warm-white Extra warm-white Tunable white* RGB color control* RGB + Neutral-White	4000 K 5000 K 3000 K 2700 K 2200 K 2700 - 6500 K 4000 K	(Standard) (Optional) (Optional) (Optional) (Optional) (Optional) (Optional) (Optional)	xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx.	. . . . . 22. 65. 60. 60.	xx. xx. xx. xx. xx. xx. xx. xx.	xx. xx. xx. xx. xx. xx. xx. xx.	xx. xx. xx. xx. xx. xx. xx. xx.	xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx.	x x x x x x x x
* 90 %		* (only in combination with dimming DMX) Combinations up to two strips of LED possible									
Dimming		Dimmable 0 - 10 V DMX (RGB possible) LUTRON (contact factory)		(Standard) (Optional) (Optional)	xxx. xxx. xxx.	xx. xx. xx.	51. 31. 71.	00. 00. 00.	xx. xx. xx.	xxx. xxx. xxx.	x x x
Finishes		22 aluminum 30 anthracite 27 aluminum 32 black 33 black 35 NKS 36 brass 37 bronze 38 copper 10 black 40 brass 42 bronze 44 black XX	white aluminum anthracite aluminum black aluminum black NKS brass bronze copper black brass bronze black	(Optional) aluminum anthracite aluminum black aluminum black NKS brass bronze copper black brass bronze black	xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx.	xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx.	xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx.	xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx.	xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx.	x x x x x x x x x x x x x	
Power Supply Cable		Z 71 white Z 72 grey Z 73 black Z 74 orange Z 75 YLK Z 76 green	white grey black orange YLK green	(Optional) white grey black orange YLK green	xxx. xxx. xxx. xxx. xxx. xxx.	xx. xx. xx. xx. xx. xx.	xx. xx. xx. xx. xx. xx.	xx. xx. xx. xx. xx. xx.	xx. xx. xx. xx. xx. xx.	xxx. xxx. xxx. xxx. xxx. xxx.	x x x x x x


1.8.17 , 3.307.; 30./.; (\* 6 < : ; 0 \*

## ELLIPSE LIGHT + ACOUSTIC


Housing: Aluminum profile, integrated acrylic cover. Fabric covering as a light and acoustic diffuser.  
Design: SATTLER




1670 x 830 / 2400 x 1190 mm  
65.7 x 32.7 / 94.5 x 46.9"




### Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy




suspension through canopy




4 current-carrying steel cables. Only 1 strip LED possible. Not in combination with RGB




Max. 1670 x 830 Suspension with pendant canopy PB 366 and steel cables  
(a) 5000 mm / 196.8" +  
(b) 3000 mm / 118.1"




Max. 1670 x 830 Suspension with pendant canopy PB 366 and steel cables  
(a) 5000 mm / 196.8" +  
(b) 3000 mm / 118.1"  
Not in combination with RGB



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy



Suspension point as clamping unit with 4 current-carrying cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, G, H = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height 1670 x 830 => 550mm / 21.6"  
2399 x 1190 => 750mm / 29.5"

Including steel cable suspension 5000mm / 197" ; Version F, R, S, T 5000 / 3000mm / 197"/118" and/or power supply cable 5000mm / 197"


X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

**Dimensions of external power supply units (1 LED Stripe)**

Typ	Size mm / inch	For use with Mounting Version
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, G, K

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**




**Dimensions of canopy (1 LED Stripe)**

Typ	Size mm / inch	For use with Mounting Version
DB 290	Ø 290 / 260 mm / 11.4 x 10.2" size 1.670 x 830mm / 65.7 x 32.7"	B, E, F, H
DB 350	Ø 350 / 320 mm / 13.7 x 12.5" size 2.400 x 1190mm / 94.5 x 46.9"	B, E, F, H
PB 366	Ø 90 H 366 mm / 13.7 x 12.5"	S, T

Canopy finish: white (11) contact factory for other finishes  
USA/Canada: Canopy mounts to 4" octagonal junction box.

### Optional



### Ceiling fixation for mounting version A

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.

**200. 00. 00. 00. 11** (white)