


ELLIPSE


Housing: (S\TUT WYVÄSL PU[LNYH[LK 0 VY 3 ZOHWLK HJY`SPJ
+LZPNUI! :(;;3,9

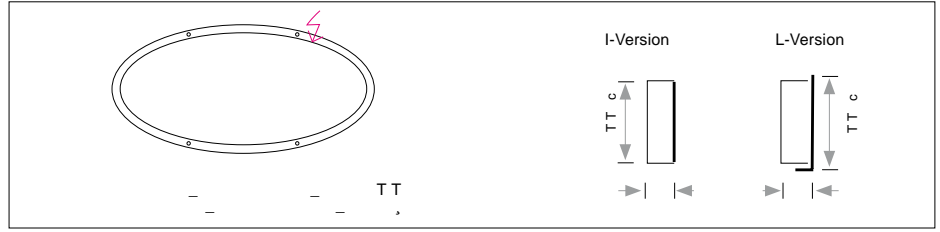

Sizes	Size: L x W x H mm	inches	LED Watt	Lumen ¹⁾	weight kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
I-Version	1670 x 830 x 80	65.7 x 32.7 x 3.1				873.	xx.	xx.	xx.	xx.	xxx.	x
	2400 x 1190 x 80	94.5 x 46.9 x 3.1				885.	xx.	xx.	xx.	xx.	xxx.	x
L-Version	1670 x 830 x 107	65.7 x 32.7 x 4.2				872.	xx.	xx.	xx.	xx.	xxx.	x
	2400 x 1190 x 107	94.5 x 46.9 x 4.2				884.	xx.	xx.	xx.	xx.	xxx.	x
LED = * 90 %		Neutral-white Cold-white Warm-white Extra warm-white Extra warm-white Tunable white* RGB color control* RGB + Neutral-White*	4000 K 5000 K 3000 K 2700 K 2200 K 2700 - 6500 K	(Standard) (Optional) (Optional) (Optional) (Optional) (Optional)	xxx. xxx. xxx. xxx. xxx. xxx.	22. 65. 60. 60.	xx. xx. xx. xx. xx. xx.	xx. xx. xx. xx. xx. xx.	xx. xx. xx. xx. xx. xx.	xxx. xxx. xxx. xxx. xxx. xxx.	x x x x x x	
Dimming		Dimmable 0 - 10 V DMX (RGB possible) LUTRON (contact factory)		(Standard) (Optional) (Optional)	xxx. xxx. xxx.		xx. xx. xx.	51. 31. 71.	00. 00. 00.	xx. xx. xx.	xxx. xxx. xxx.	x x x
Finishes		22 aluminum 30 anthracite 27 aluminum 32 black 33 black 35 brass 36 brass 37 bronze 38 copper 10 black 40 brass 42 bronze 44 bronze XX	white aluminum anthracite aluminum black black brass brass bronze copper black brass bronze bronze	(Optional) WVSPZOLK IYZO ÄUPZOLKJVKP SÄHUKZPSJLY ÄUL [L_]\YLK W#PH[LKWH[PUH[LÄOP[L IVYKLYZ	xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx.	xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx.	xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx.	xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx. xx.	xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx. xxx.	x x x x x x x x x x x x x		
Power Supply Cable		Z 71 white Z 72 grey Z 73 black Z 74 orange Z 75 yellow Z 76 green	white grey black orange yellow green	(Optional) Z 71 white Z 72 grey Z 73 black Z 74 orange Z 75 yellow Z 76 green	xxx. xxx. xxx. xxx. xxx. xxx.	xx. xx. xx. xx. xx. xx.	xx. xx. xx. xx. xx. xx.	xx. xx. xx. xx. xx. xx.	xx. xx. xx. xx. xx. xx.	xxx. xxx. xxx. xxx. xxx. xxx.	x x x x x x	

ELLIPSE

Housing: Aluminum profile, integrated (I) or L-shaped acrylic cover (L)
 Design: SATTLER

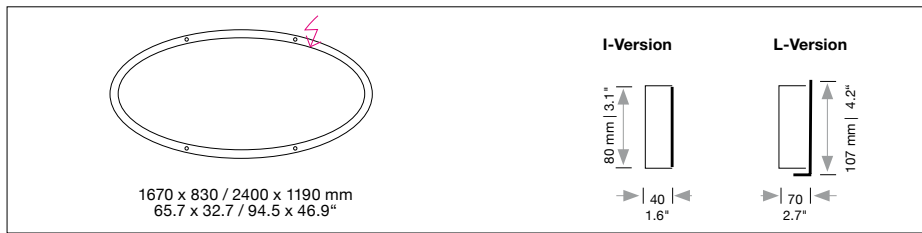

Mounting Version

<p>A</p> <p>4-point suspension with external power supply unit in suspended ceiling</p>	<p>B</p> <p>4-point suspension with external power supply unit in separate canopy</p>	<p>E</p> <p>suspension through canopy</p>	<p>F</p> <p>4 current-carrying steel cables. Only 1 strip LED possible. Not in combination with RGB</p>	<p>S</p> <p>Max. 1670 x 830 Suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"</p>	<p>T</p> <p>Max. 1670 x 830 Suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB</p>
<p>G</p> <p>Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling</p>	<p>H</p> <p>Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy</p>	<p>K</p> <p>Suspension point as clamping unit with 4 current-carrying cables and remote technical unit in suspended ceiling.</p>			

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, G, H = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height 1670 x 830 => 550mm / 21.6"
 2399 x 1190 => 750mm / 29.5"

Including steel cable suspension 5000mm / 197" ; Version F, R, S, T 5000 / 3000mm / 197"/118" and/or power supply cable 5000mm / 197"

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---


Complete order number

Dimensions of external power supply units (1 LED Stripe)			
Typ	Size mm / inch	For use with Mounting Version	
	L W H		
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, G, K	

Dimensions of canopy (1 LED Stripe)			
Typ	Size mm / inch	For use with Mounting Version	
	Ø cover plate / body		
DB 290	Ø 290 / 260 mm / 11.4 x 10.2" size 1670 x 830 mm	B, E, F, H	
DB 350	Ø 350 / 320 mm / 13.7 x 12.5" size 2400 x 1190 mm	B, E, F, H	
PB 366	Ø 90 H 366 mm / 13.7 x 12.5"	S, T	

Canopy finish: white (11) contact factory for other finishes
 USA/Canada: Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**




Optional



LED spot in canopy
 4W/20°-40°, 400 Lumen (order separately)

762. 67. 01. 04. 11. (white)



Ceiling fixation for mounting version A

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.



Light distribution
 direct / indirect



Conforms to UL-STD 1598
 Certified to CSA-STD C22.2
 No.250.0-08

1) Net lumen output: Losses due to diffusers and reflectors are considered.
 Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
 2) Weight of lights without remote technical unit or canopy.