
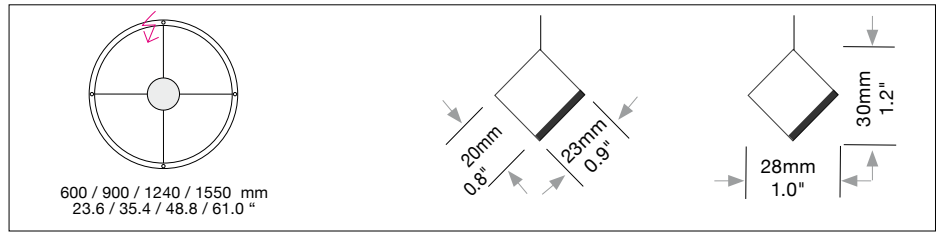


GIRATA Horizontal


Housing: Circular aluminum profile bent inwards 45°. Integrated acrylic cover.
Design: MARKUS BISCHOF

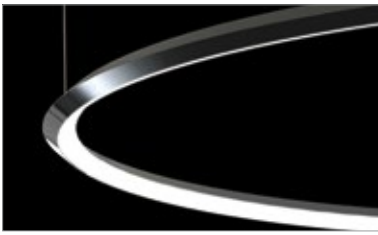


600 / 900 / 1240 / 1550 mm
23.6 / 35.4 / 48.8 / 61.0"

| Size | Size: Ø mm | inches | LED Watt | Lumen ¹⁾ | weight kg ²⁾ / lbs ²⁾ | Item No. | LED | Dimming | LED | Finishes | Power Supply cable | Mounting Version | | | | | | | | | | |
|---|------------------------------|--------|---|---|--|--|--|--|--|------------------------------|--------------------------------------|---------------------------------------|-------------------------|--------------------------------------|--------------------------------|--------|------|------|------|------|--------|---|
| Sizes | | | | | | | | | | | | | | | | | | | | | | |
| Sizes | Ø 600 mm | 23.6" | 33 | 1,530 | 3.0 / 6.6 | 895. | X X. | X X. | X X. | X X. | X X X. | X | | | | | | | | | | |
| | Ø 900 mm | 35.4" | 55 | 2,486 | 3.5 / 7.7 | 896. | X X. | X X. | X X. | X X. | X X X. | X | | | | | | | | | | |
| | Ø 1240 mm | 48.8" | 72 | 3,314 | 5.0 / 11.0 | 897. | X X. | X X. | X X. | X X. | X X X. | X | | | | | | | | | | |
| | Ø 1550 mm | 61.0" | 88 | 4,060 | 5.5 / 12.1 | 898. | X X. | X X. | X X. | X X. | X X X. | X | | | | | | | | | | |
| LED | 24V CRI > 90 *CRI > 80 | | Warm-white Neutral-white Extra warm-white Extra warm-white | 3000 K 4000 K 2700 K 2200 K* | (Standard) (Optional) (Optional) (Optional) | X X X. | 30. 40. 27. 22. | X X. X X. X X. X X. | X X. X X. X X. X X. | X X. X X. X X. X X. | X X X. X X X. X X X. X X X. | X X X X | | | | | | | | | | |
| Dimming | | | Dimmable 0 - 10 V DMX (RGB possible) LUTRON (contact factory) | | (Standard) (Optional) (Optional) | X X X. X X X. X X X. | X X. X X. X X. | 51. 31. 71. | 00. 00. 00. | X X. X X. X X. | X X X. X X X. X X X. | X X X | | | | | | | | | | |
| Finishes | | | 11 white | (Optional) | 22 aluminum polished | 27 brush-finished aluminum | 30 anthracite | 32 crocodile black | 33 sand silver fine textured | 35 gold | 36 brass | 37 bronze fine textured | 38 copper | 10 black fine textured | XX Custom finish | X X X. | X X. | X X. | X X. | X X. | X X X. | X |
| Power Supply Cable | | | Z 70 Silver | (Optional) | Z 71 white | Z 72 grey | Z 73 black | Z 74 orange | Z 75 red | Z 76 green | | | | | | X X X. | X X. | X X. | X X. | X X. | X X X. | X |
| When using current carrying steel cables in Mounting Versions F, K, R, T leave this section blank | | | | | | | | | | | | | | | | | | | | | | |


GIRATA Horizontal

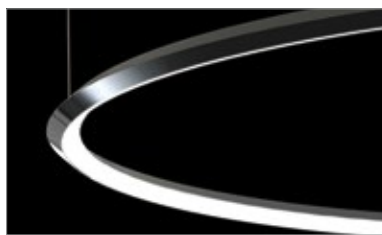


Housing: Circular aluminum profile bent inwards 45°. Integrated acrylic cover.
Design: MARKUS BISCHOF

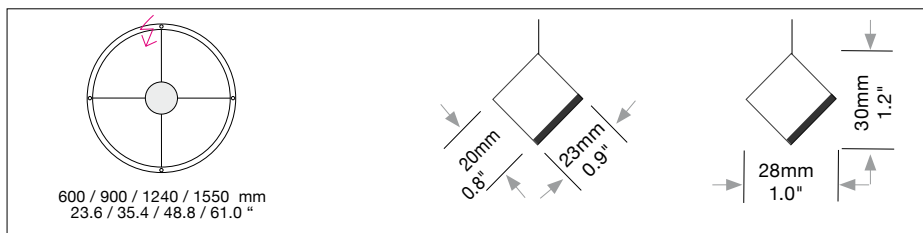


Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy




suspension through canopy




4 current-carrying steel cables. Not in combination with RGB




Suspension with current-carrying steel cables and cavity wall box. Not in connection with RGB.




Suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"



Suspension with pendant canopy PB 366 and current-carrying steel cables. (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Suspension point as clamping unit with 4 cables and remote technical unit in suspended ceiling.

| Item No. | LED | Dimming | LED | Finishes | Power Supply cable | Mounting Version |
|----------|------|---------|------|----------|--------------------|------------------|
| X X X. | X X. | X X. | X X. | X X. | X X X | . |

| | | | | | | |
|--------|------|------|------|------|-------|---|
| X X X. | X X. | X X. | X X. | X X. | X X X | X |
|--------|------|------|------|------|-------|---|

Complete order number

A, B, G, R, K = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm/197"; Version F,R 3000mm/118"; Version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

| Typ | Size mm / inch | | | For use with Mounting Version |
|-------|---------------------------------------|------------|---|-------------------------------|
| | L | W | H | |
| DE 1F | 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3" | A, G, R, K | | |

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

Canopy finish: **white (11)** contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.


| Typ | Size mm / inch | | For use with Mounting Version |
|--------|-------------------------------|------------------------------|-------------------------------|
| | Ø cover plate | Ø body | |
| DB 230 | Ø 230 / 210 mm / 9.1 x 8.3" | up to size Ø 900 mm / 35.4" | B, E, F |
| DB 290 | Ø 290 / 260 mm / 11.4 x 10.2" | up to size Ø 1550 mm / 61.0" | B, E, F |
| PB 366 | Ø 90 H 366 mm / 3.5 x 14.4" | up to size Ø 1550 / 61.0" | S, T |

Optional



LED spot in canopy
(Girata size Ø 900 mm / 35.4", Dimension canopy DB 290)
4W/20°-40°, 400 Lumen (order separately)

762. 67. 01. 04. 11. (white)



Ceiling mounting version A, G

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, G.

200. 00. 00. 00. 11. (white)