

IMPORTANT: Fixture(s) must be wired in series! Refer to driver wiring document


Luminaires must be installed by a qualified electrician. Check with local and national codes for proper installation.



To prevent electrical shock disconnect electrical supply before installation or servicing.

Never connect a live fixture!!!

Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight. Provide blocking when necessary.

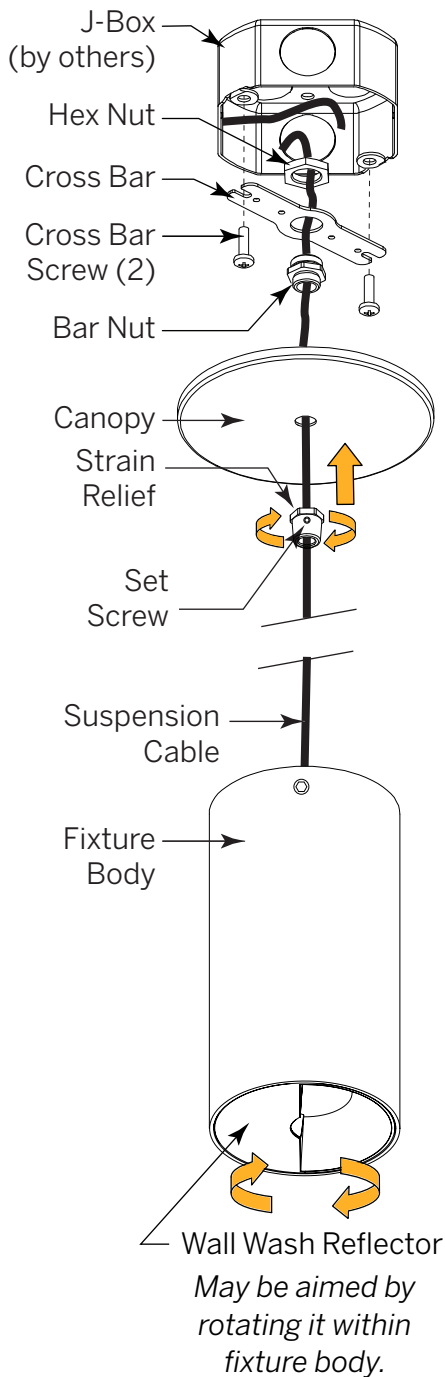

Step 1

Open the Box

Unpack luminaire unit. Remote drivers and housings are supplied by Inter-lux.

Step 2

Ceiling Preparation

- Mark location, cut opening, and mount J-Box. Pull power (and control) cable(s) inside. Attach Cross Bar with supplied screws.
- Screw Bar Nut to bottom of Cross Bar. Secure with Hex Nut above Bar.

Step 3

Electrical Connection

- From fixture, feed cable through Strain Relief and Canopy into J-Box.
- Inside J-Box, connect power (and control) wire(s) using suitable connectors.

NOTE: Hex Side of Strain Relief to contact canopy, as shown.

Step 4

Secure Luminaire

Slide Canopy and Strain Relief up the Suspension cable. Screw Strain Relief to Bar Nut. Lock in place with Set Screw. Energize!

Need Help?

Included in Box

- Fixture Body with Integral Driver (or none, if remote driver specified) with connected cable.
- Cross Bar
- Cross Bar Screws
- Bar Nut
- Hex Nut
- Canopy
- Strain Relief with Set Screw

