


GIRATA Vertical



Housing: Circular aluminum profile with integrated acrylic
Design: MARKUS BISCHOF

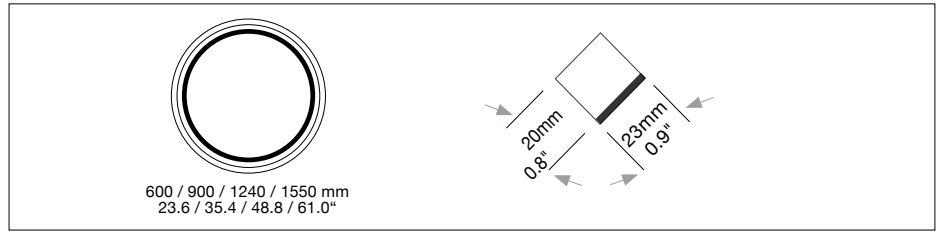


Sizes	Size: Ø mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
	Ø 600 mm	23.6"	33	1,530	3.0 / 6.6	901.	X X.	X X.	X X.	X X.	X X X.	X
	Ø 900 mm	35.4"	55	2,486	3.5 / 7.7	902.	X X.	X X.	X X.	X X.	X X X.	X
	Ø 1240 mm	48.8"	72	3,314	5.0 / 11.0	903.	X X.	X X.	X X.	X X.	X X X.	X
	Ø 1550 mm	61.0"	88	4,060	5.5 / 12.1	904.	X X.	X X.	X X.	X X.	X X X.	X
LED 24V CRI > 90 *CRI > 80			Warm-white	3000 K	(Standard)	X X X.	30.	X X.	X X.	X X.	X X X.	X
			Neutral-white	4000 K	(Optional)	X X X.	40.	X X.	X X.	X X.	X X X.	X
			Extra warm-white	2700 K	(Optional)	X X X.	27.	X X.	X X.	X X.	X X X.	X
			Extra warm-white	2200 K*	(Optional)	X X X.	22.	X X.	X X.	X X.	X X X.	X
Dimming			Dimmable 0 - 10 V		(Standard)	X X X.	X X.	51.	00.	X X.	X X X.	X
			DMX (RGB possible)		(Optional)	X X X.	X X.	31.	00.	X X.	X X X.	X
			LUTRON (contact factory)		(Optional)	X X X.	X X.	71.	00.	X X.	X X X.	X
Finishes												
(Standard)	11 white	(Optional)	22 aluminum polished	27 brush-finished aluminum	30 anthracite	32 crocodile black	33 sand silver fine textured					
			35 gold	36 brass	37 bronze fine textured	38 copper	10 black fine textured					
						XX Custom finish	X X X.	X X.	X X.	X X.	X X X.	X
Power Supply Cable												
(Standard)	Z 70 Silver	(Optional)	Z 71 white	Z 72 grey	Z 73 black							
When using current carrying steel cables in Mounting Versions F, R leave this section blank												
			Z 74 orange	Z 75 red	Z 76 green							
							X X X.	X X.	X X.	X X.	X X X.	X

GIRATA Vertical


Housing: Circular aluminum profile with integrated acrylic
Design: MARKUS BISCHOF

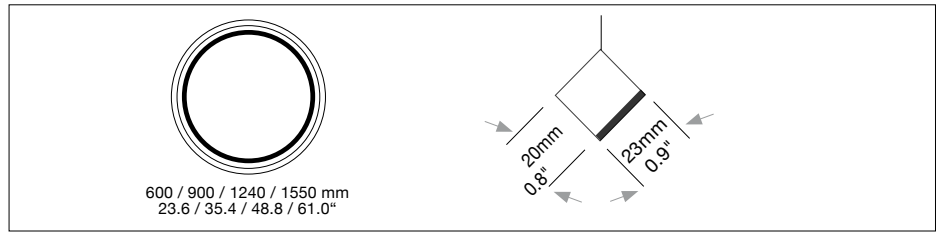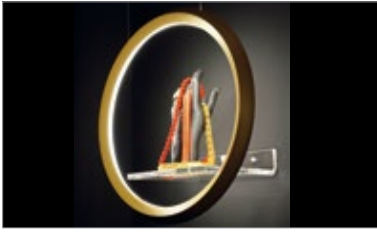


Mounting Version




2 point suspension, with external power supply unit in suspended ceiling



Suspension through canopy



Current-carrying steel cables.



Suspension with current-carrying steel cables and cavity wall box.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
x x x.	x x.	x x.	x x.	x x.	x x x	.

A, R = Distance of external power supply unit to light fixture max. 10m / 394".

Including steel cable suspension 3000mm / 118"
or/and power supply cable 3000mm / 118"



x x x.	x x.	x x.	x x.	x x.	x x x	x
--------	------	------	------	------	-------	---

Complete order number

Dimensions of external power supply units

Typ	Size mm / inch			For use with Mounting Version
	L	W	H	
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"			A, R

Input voltage for all external power supply units and canopy is


Dimensions of canopy

Typ	Size mm / inch		For use with Mounting Version
	body /H		
DBL 390	up to Ø 1240 mm	L 390 x B 70 x H 70 mm L 15.3 x B 2.7 x H 2.7"	F / E
DBL 490	up to Ø 1550mm	L 490 x B 70 x H 70 mm L 19.4 x B 2.7 x H 2.7"	F / E

Canopy finish: white (11)
contact factory for other finishes

USA/Canada: Canopy mounts to 4" single junction box.

Optional



Ceiling mounting version A

200. 00. 00. 00. 11 (white)
Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.