

IMPORTANT: Fixture(s) must be wired in series! Refer to driver wiring document


Luminaires must be installed by a qualified electrician. Check with local and national codes for proper installation.



To prevent electrical shock disconnect electrical supply before installation or servicing.

Never connect a live fixture!!!

Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight. Provide blocking when necessary.

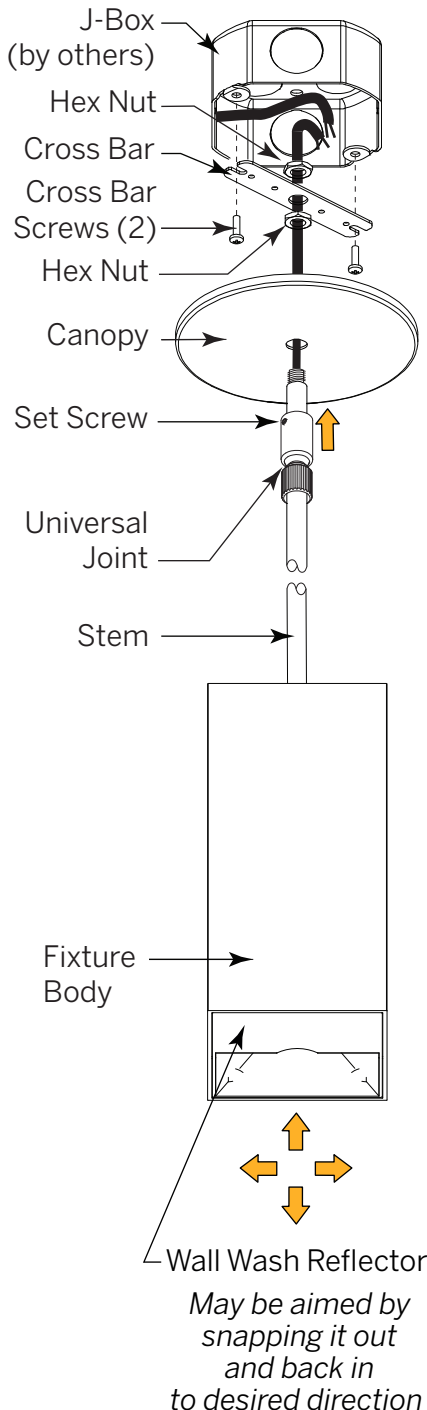

Step 1 Open the Box

Unpack luminaire unit. Remote drivers and housings are supplied by Inter-lux.

Step 2 Ceiling Preparation

Mark location, cut opening, and mount J-Box. Pull power (and control) cable(s) inside. Attach Cross Bar with supplied screws.

Step 3 Mounting

- From Fixture Body, feed cable through stem. If stem supplied in multiple pieces, feed cable through first section and **then** through second section. Now join first to second. Repeat if needed.
- Screw Stem assembly to Fixture Body. Slide Strain Relief onto top of Stem. Follow with Canopy. Screw on Hex Nut on top of Canopy.
- Screw top of Stem to Cross Bar. Tighten Hex Nut to secure.

Step 4 Connect Electricals & Secure

- Inside J-Box connect power (and control) cable(s) using suitable connectors.
- Slide Canopy and Universal Joint up the Stem to ceiling. Lock in place with Set Screw. Energize!

Need Help?

Included in Box

- Fixture Body with Integral Driver (or none, if remote driver specified) with connected cable.
- Cross Bar
- Cross Bar Screws
- Hex Nuts
- (1-3) Stem(s) as specified
- Canopy
- Universal Joint for Sloped Ceiling

